

Network video recorder (NVR) SH

User manual



BE DIFFERENT
LEAD WITH IT

Contents

SAFETY INSTRUCTION	9
Chapter 1. Product Overview.....	10
1.1. Front Panel.....	10
1.2. Rear Panel	11
1.3. Remote Controller	13
Chapter 2. Installation & Connection	14
2.1. HDD Installation	14
2.2. Connection Diagram	15
2.3. Power Supply Connection.....	15
Chapter 3. Common Operations.....	16
3.1. Using the Supplied Mouse	16
3.2. Using Virtual Keyboard	16
3.3. Password.....	17
3.3.1. Password Generation.....	17
3.3.2. Reset Password	18
3.3.2.1. Reset with password recovery questions	18
3.3.2.2. Reset with secret key	19
3.3.2.3. Reset with Super Code.....	19
3.3.2.4. Hard Reset.....	20
Chapter 4. NVR Starting Up	21
4.1. Start Wizard	21
4.1.1. Network Configuration	21
4.1.2. Date/Time	23
4.1.3. IP Camera	25
4.1.3.1. Connect IP Camera to NVR PoE Ports.....	25
4.1.3.2. Add IP Camera to PoE NVR from LAN	26
4.1.3.3. Add IP Camera to PoE NVR from Internet	27
4.1.3.4. Add IP Camera to Non-PoE NVR	28
4.1.4. Disk.....	29
4.1.5. Resolution	30
4.1.6. Mobile	30
4.1.7. Summary	31
4.2. Live View Screen Overview	32
4.2.1. Definitions of On-screen Icons & Messages	32
4.2.2. Camera Quick Toolbar	33

4.2.3. Taskbar	35
4.2.4. Status Bar	36
4.2.5. Start Menu	37
4.2.6. Fisheye Camera	38
4.2.7. Alarm Notification Panel	40
Chapter 5. System Setup	41
5.1. Channel	41
5.1.1. Channel	42
5.1.1.1. IP Channels	42
5.1.1.1.1. PoE NVR Connection	42
5.1.1.1.2. Non-PoE NVR Connection	51
5.1.1.2. PoE Power	51
5.1.2. Live	51
5.1.3. Image Control	54
5.1.3.1. Full Color Camera Settings	57
5.1.4. PTZ	59
5.1.4.1. MFZ & PTZ Control	59
5.1.4.1.1. Controlling Your MFZ Camera	59
5.1.4.1.2. Controlling Your PTZ Camera	60
5.1.5. Privacy Zone	70
5.1.6. Motion Detection	71
5.1.6.1. Motion Alarm Settings	73
5.1.7. PIR	75
5.1.7.1. PIR Alarm Settings	76
5.1.8. ROI	78
5.2. Record	79
5.2.1. Encoding Settings	79
5.2.1.1. Video Encoding	79
5.2.1.2. Audio Encoding	81
5.2.2. Record	82
5.2.2.1. Recording Configuration	83
5.2.2.2. Recording Schedule	83
5.2.3. Capture Images	85
5.2.3.1. Capture Configuration	85
5.2.3.2. Capture Schedule	85
5.3. Alarm Settings	87
5.3.1. Motion Alarm	87

5.3.2. PIR Alarm.....	89
5.3.3. I/O Alarm.....	91
5.3.4. Combined Alarm	93
5.3.5. PTZ Linkage	95
5.3.6. Exception Alarm	96
5.3.7. Alarm Schedule	97
5.3.8. Voice Prompts.....	98
5.3.8.1. Voice File Management	98
5.3.8.1.1. Creating Voice Files.....	98
5.3.8.1.2. Audition Voice.....	99
5.3.8.1.3. Delete Voice Files.....	100
5.3.8.2. Loop Management.....	101
5.3.9 Deterrence	102
5.3.10. Siren	104
5.3.11. Disarming	106
5.4. AI	108
5.4.1. AI Setup.....	108
5.4.1.1. FD (Face Detection).....	108
5.4.1.2. PD & VD (Human & Vehicle Detection)	111
5.4.1.3. PID (Perimeter Intrusion Detection)	113
5.4.1.4. LCD (Line Crossing Detection).....	114
5.4.1.5. CC (Cross Counting Detection).....	115
5.4.1.6. HM (Heat Map)	117
5.4.1.7. CD (Crowd Density Detection)	118
5.4.1.8. QD (Queue Length Detection)	119
5.4.1.9. LPD (License Plate Detection)	120
5.4.1.10. RSD (Rare Sound Detection)	122
5.4.1.11. SOD (Stationary Object Detection)	123
5.4.1.12. Sound Detection	125
5.4.1.13. Video Tampering.....	126
5.4.1.14. Schedule.....	126
5.4.2. AI Recognition	127
5.4.2.1. Model Configuration.....	127
5.4.2.2. Face Recognition Database Management	130
5.4.2.2.1. Create Face Profiles from Local Storage Device	130
5.4.2.2.2. Create Individual Face Profile from External Storage Device	133
5.4.2.2.3. Create Bulk Face Profiles from External Storage Device	136

5.4.2.2.4. Edit Face Profiles.....	140
5.4.2.3. License Plate Management.....	142
5.4.2.3.1. Create License Profiles from Local Storage Device.....	143
5.4.2.3.2. Create License Profiles by Manual.....	145
5.4.2.3.3. Create Bulk License Profiles.....	147
5.4.2.3.4. Edit License Profiles.....	151
5.4.3. AI Alarm Settings.....	154
5.4.3.1. FR (Face Recognition) Alarm Settings.....	154
5.4.3.2 AD (Attribution Detection) Alarm Settings.....	156
5.4.3.3. LPR (License Plate Recognition) Alarm Settings.....	158
5.4.3.4. PD & VD (Human & Vehicle Detection) Alarm Settings.....	161
5.4.3.5. FD/PID/LCD/CC/CD/QD/LPD/RSD/SOD/Sound Detection/Video Tampering Alarm Settings.....	162
5.4.4. Statistics.....	165
5.4.4.1. FR (Face Recognition) Statistics.....	165
5.4.4.2. PD & VD (Human & Vehicle Detection) Statistics.....	166
5.4.4.3. CC (Cross Counting) Statistics.....	167
5.4.4.4. HM (Heat Map) Statistics.....	168
5.5. Network.....	169
5.5.1. General Settings.....	169
5.5.1.1. General.....	169
5.5.1.2. PPPoE Settings.....	171
5.5.1.3. SNMP.....	171
5.5.1.4. Wireless Connection.....	172
5.5.1.5. Port Configuration.....	173
5.5.2. DDNS.....	175
5.5.3. Email Settings.....	176
5.5.3.1. Email Configuration.....	176
5.5.3.2. Email Schedule.....	177
5.5.4. IP FILTER.....	179
5.5.5. Voice Assistant.....	180
5.5.5.1. Voice Assistant with Amazon Fire TV Stick.....	180
5.5.5.2. Voice Assistant with Google Chromecast.....	186
5.5.6. Platform Access.....	194
5.5.6.1 Onvif.....	194
5.5.6.2 RTMP.....	194
5.6. Device.....	196

5.6.1. HDD	196
5.6.1.1 Disk Group.....	198
5.6.1.2. S.M.A.R.T.....	199
5.6.1.3 RAID.....	199
5.6.1.3.1. Enabling RAID.....	200
5.6.1.3.2. Creating RAID.....	200
5.6.1.3.3. Setting Hot Spare Disks.....	202
5.6.1.3.4. Rebuilding RAID	202
5.6.1.3.5. Deleting RAID	203
5.6.1.3.6 Viewing RAID Information	203
5.6.2. Cloud Storage.....	205
5.6.2.1. Dropbox Settings.....	206
5.6.2.2. Google Drive Settings.....	207
5.6.3 FTP Settings.....	210
5.6.3.1. FTP Schedule	211
5.7. System Configuration.....	212
5.7.1. General Settings.....	212
5.7.1.1. General.....	212
5.7.1.2. Date and Time.....	213
5.7.1.3. DST	214
5.7.1.4. Output Configuration.....	215
5.7.1.5 Auxiliary Screen&Decoding.....	216
5.7.2. Users	218
5.7.2.1. Edit Users	218
5.7.2.2. Edit User Permissions	220
5.7.3. Maintenance	222
5.7.3.1. System Log	222
5.7.3.2. Load Default.....	223
5.7.3.3. Reset Settings.....	223
5.7.3.4. System Upgrade	224
5.7.3.4.1. Upgrade by USB Flash Drive	224
5.7.3.4.2. Online Upgrade	224
5.7.3.5. Parameter Management	225
5.7.3.6. Auto Reboot.....	225
5.7.3.7. Developer Mode	226
5.7.4. IP Camera Maintain	228
5.7.4.1. Upgrade IP Camera	228

5.7.4.2. Load Default Settings of IP Camera	229
5.7.4.3. Reboot IP Camera	230
5.7.4.4. Parameter Management	230
5.7.4.5. Format IP Camera	231
5.7.5. System Information	232
5.7.5.1. System Information	232
5.7.5.2. Channel Information	233
5.7.5.3. Record Information.....	233
5.7.5.4. Network State	234
Chapter 6. AI Scenario.....	235
6.1. Cross Counting	235
6.1.1. Real-time Display & Controls	236
6.1.2. Settings of Channel View Mode.....	238
6.1.3. Settings of Group View Mode.....	240
6.1.4. Advertise Mode.....	243
6.1.5. Search Counting Data	245
6.2. Face Attendance	246
6.3. Object Classification.....	248
Chapter 7. Search, Playback & Backup	250
7.1. Search & Play in General.....	250
7.1.1. Video Segment Backup	253
7.2. Search, Play and Back Up Event Recordings	255
7.2.1. Event Playback Control	256
7.3. Sub-periods Playback	259
7.4. Smart Search & Playback	262
7.5. Tag Search & Playback	265
7.6. Play External File	266
7.7. Search & View Snapshoots	268
7.7.1. Playing Slideshow.....	269
7.8. Slice Search	270
7.9. AI Search	272
7.9.1. Face Detection Events.....	272
7.9.1.1. Playing Events	273
7.9.1.2. Search & Compare Face Images (Recognition).....	275
7.9.1.3. Tracking Face	276
7.9.2. Search License Plate.....	280
7.9.3. Human & Vehicle	282

7.9.4. PID & LCD	284
7.9.5. Repeat Visitors	286
7.9.6. Face Attendance	288
Chapter 8 Remote Access	290
8.1 Basic System Environment Requirements	290
8.2 Web Plug-in Downloading and Installation	291
8.3 Web Client Management	293
8.3.1 Live View Page	293
8.3.2 Playback Page.....	299
8.3.2.1 Playback Control Icons.....	300
8.3.2.2 Image Playback	302
8.3.2.3 Smart Playback.....	303
8.3.2.4 Playback by Tag.....	303
8.3.2.5 AI Playback	304
8.3.3 Remote Setting	305
8.3.4 Local Setting.....	306
Contacts:	307

SAFETY INSTRUCTION

Please read the following safety instruction carefully to avoid personal injuries and prevent the equipment and other connection devices from being damaged.

- The device should be used in compliance with local laws, electrical safety regulations, and fire prevention regulations.
- Use the power supply attached or specified by the manufacturer only. Never operate the equipment by using an unspecified power supply.
- Firmly connect the plug to the power socket. Do not connect several devices to one power adapter.
- Power off the device before connecting and disconnecting accessories and peripherals.
- The NVR should not be placed in a dusty field.
- The NVR should be placed in sealing condition with good ventilation and kept away from sunshine, rain and water. If the equipment is accidentally in contact with water, unplug the power cable immediately and contact your local dealer.
- The NVR includes HDD which produces large amount of heat during operation. Do not block the vents (on the top, bottom and both sides) for cooling the system during operation.
- Never place the NVR in an unstable location. The NVR may fall to cause serious personal injury or death.
- Keep the surface of the NVR clean and dry. Use soft cloth to clean the outer case of NVR and do not use liquid aerosol cleaners.
- If smoke, odor or noise rise from the NVR, turn off the power immediately, unplug the power cable, and then contact your local dealer.
- This product contains a coin/button cell battery. If the battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Keep new and used batteries away from children.
- Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may cause an explosion.
- Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
- Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.

Chapter 1. Product Overview

1.1. Front Panel



***All physical interfaces shown in above pictures are for illustration purpose only. The interfaces in your actual product may vary with models.**

No.	Item	Status	Description
1	Power status indicator	Solid on	The device is operating properly.
		Not lit	The device is shut down or not powered on.
2	LAN interface status indicator	Solid on	The device is connected to the network properly.
		Not lit	The device is disconnected from the network.
3	WAN interface status indicator	Solid on	The device is connected to the network properly.
		Not lit	The device is disconnected from the network.
4	Hard disk status indicator	Lit green	The hard disk is operating properly and no data is read or written.
		Flashing green	The hard disk is operating properly and there is data read or written.
		Not lit	The hard disk cannot be detected or the hard disk is faulty.
5	Standby button		It is used to power on/off the system when the device has a constant power supply. You can press and hold the button for three seconds to shut down the device, and you

No.	Item	Status	Description
			can press and hold the key for 10 seconds to forcedly restart the device.
6	USB interface		Connected to a mobile USB device or a mouse.

1.2. Rear Panel



***All physical interfaces shown in above pictures are for illustration purpose only. The interfaces in your actual product may vary with models.**

No.	Item	Description
1	Audio input/output	Connected to an analog audio input/output device.
2	eSATA interface	Connected to an external storage device. At most one hard disk is supported.
3	USB interface	Connected to a mobile USB device or a mouse.
4	RS485 interface	Connected to an RS485 standard device, such as a keyboard.
5	RS232 interface	Used for debugging and maintaining the device.
6	LAN1/2	Gigabit network interface for connecting network cables.
7	HDMI-1	Primary output interface of the device, supporting output with 8K resolution.

No.	Item	Description
8	HDMI-2	Secondary output interface of the device, supporting output with 4K resolution.
9	HDMI-3	Secondary output interface of the device, supporting output with 4K resolution.
10	HDMI-4	Secondary output interface of the device, supporting output with 1080P resolution.
11	Alarm input interface	connected to alarm input devices.
12	Alarm output interface	connected to alarm output devices.
13	Reset button	Used to restore the factory settings. You can press and hold the button for 10 seconds to make the system automatically restore the factory settings, and the buzzer rings four times at the same time.
14	Power switch	Used to power on/off the device.
15	Grounding terminal	Connected to the grounding cable.

1.3. Remote Controller

	Button	Functions
	0 to 9	Numeric keys; Press number 1 to 9 to display channel 1 to 9 directly. Press combination of numbers quickly to display the channel larger than 9.
	ALL	Press to switch the channel display layout among multiple display modes
	MENU	Press to display the Task Bar while in live view; Exit and back to previous page while in system menu.
	MUTE	Mute or activate the audio output volume
	SUBMENU	First press to display the Taskbar while in live view; Second press to display the Camera Quick Toolbar.
	▲▼	Move upward or downward; Turn up or turn down the audio volume
	◀▶	Move left or right; Decrease or increase the parameter value in system setting menu
	SEL	To confirm the choice or setup
	◀◀	Rewind button. Press to play video fast rewind in different speed
	▶▶	Forward button. Press to play video fast forward in different speed
	▶	Play button; Enter search menu
	●	Manual record button
	■	Stop manual record or stop the video playback; Press and hold 3 seconds to reset the VGA/HDMI output resolution to default value.
	⏸	Press to pause video play

Chapter 2. Installation & Connection

2.1. HDD Installation

Depending on the NVR you have purchased, the hard disk drive (HDD) may be included in the full package. If it is not pre-installed, follow the installation instructions on this user manual. **Caution: Do NOT install or uninstall the HDD while the NVR is powered on.** (1) Install the ejector lever of the hard disk. Use screws to fix the hard disk on the ejector lever. You can distinguish between the left side and right side in accordance with the indicators on the ejector lever.



(2) Open the front panel. Press the buckles on the two sides on the upper part of the front panel and then pull the front panel outwards.



(3) Insert the hard disk. Align the hard disk slot and then insert the hard disk gently and smoothly.




(4) Buckle up the hard disk and close the front panel. Push in the hard disk until you hear a click. After the hard disk is installed, close the front panel.



***Above procedures are for reference only. The practical operation may vary with models.**


2.2. Connection Diagram

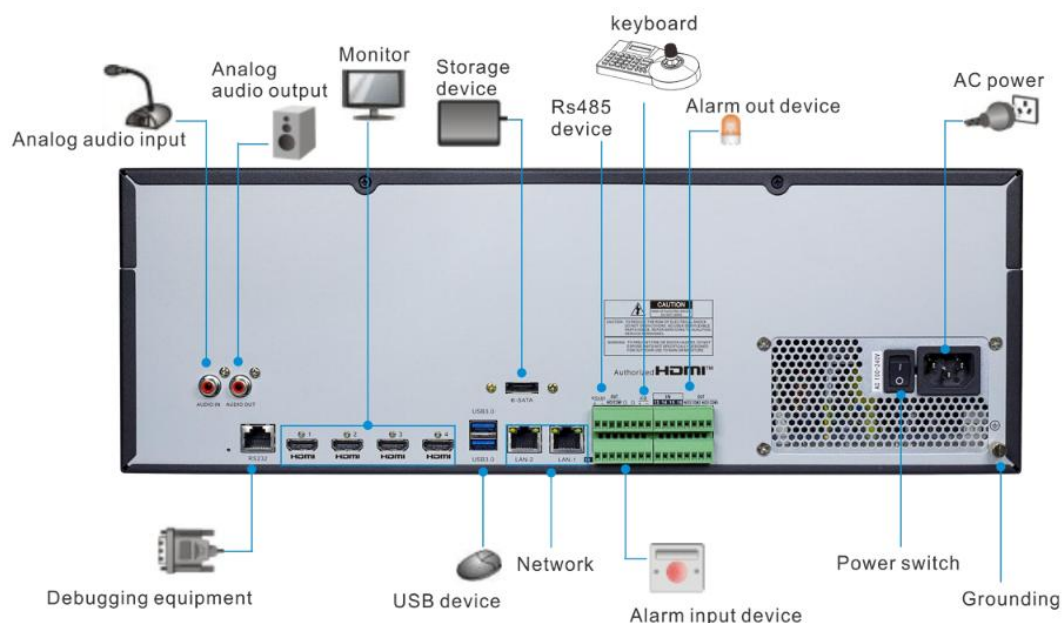


***Above connection diagram is for illustration purpose only. The interfaces in your actual product may vary with models.**

2.3. Power Supply Connection

Caution: Use the power supply attached or specified by the manufacturer only. Contact your local dealer if any problem with the power supply is found.

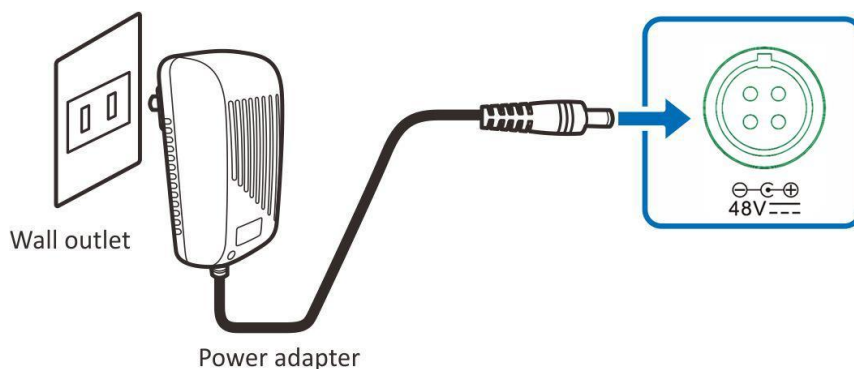


You may need to press the power switch to turn on the NVR if there is a power switch on the rear panel of your NVR.

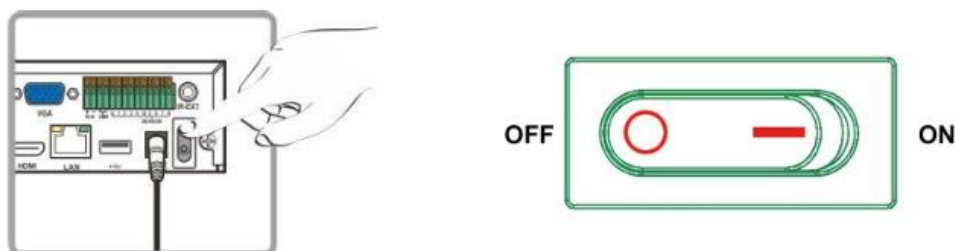

Chapter 3. Common Operations

3.1. Using the Supplied Mouse

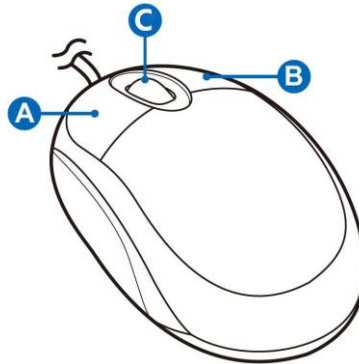

A. Left Button Click to select menu options.

- During live viewing in split-screen view, double-click on a channel to view it in
- full-screen. Double-click the channel again to return to split-screen viewing. Click upon a channel on Live Viewing screen to open Camera Quick Toolbar.
- Click and hold to drag sliders and scales on menu mode


B. Right Button Click once to open the Taskbar on the Live Viewing screen. View Taskbar on **4.2.2 Taskbar**.

- In menus, click to go back / close menus.
- **C. Scroll Wheel** In menus, scroll to move up / down through the menu content.
- While hovering over the volume control wheel, scroll to turn system volume up / down.

3.2. Using Virtual Keyboard

You will see the virtual keyboard automatically on the screen when you need to enter data, such as enter password, camera title, etc.

Click to toggle the keyboard to upper case and more punctuations

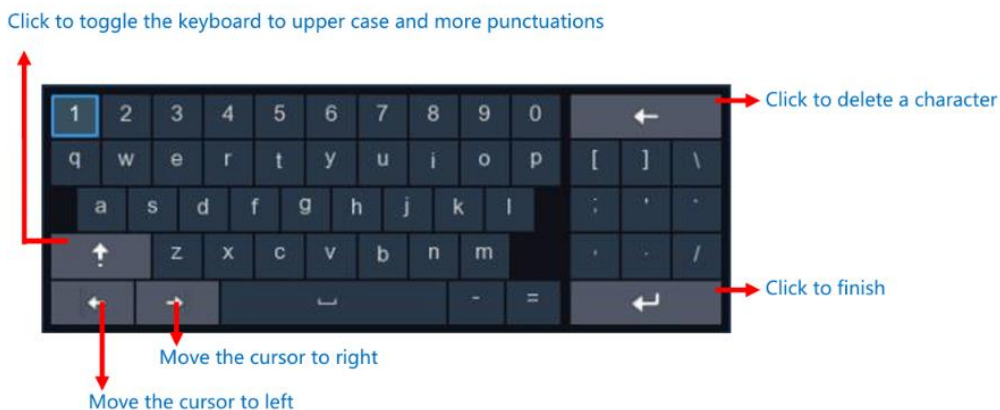


3.3. Password

Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.

3.3.1. Password Generation

For the first time when you run the NVR, you must be required to set your own password immediately in order to protect your privacy. Please be sure to record your username and password and save them in a secure place.

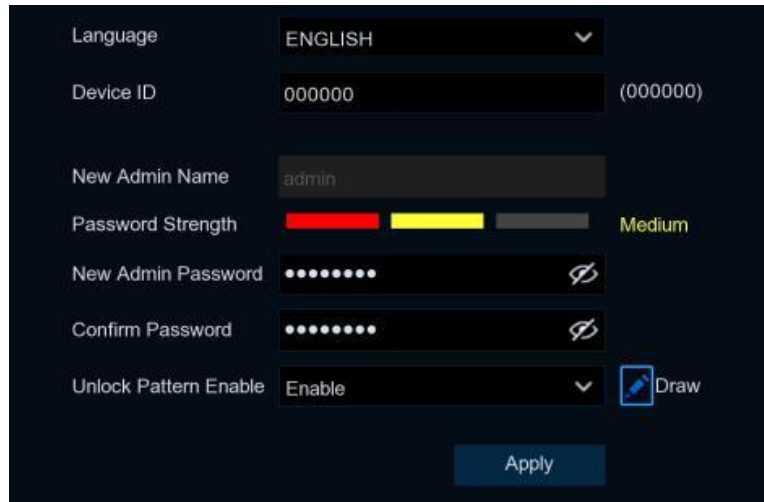

The screenshot shows the NVR configuration interface with the following fields and options:

- Language:** A dropdown menu set to "ENGLISH".
- Device ID:** A text field containing "000000" with "(000000)" in parentheses to its right.
- New Admin Name:** A text field containing "admin".
- Password Strength:** A progress bar with red, yellow, and grey segments, labeled "Medium".
- New Admin Password:** A text field with 8 dots and a "Show/Hide" icon.
- Confirm Password:** A text field with 8 dots and a "Show/Hide" icon.
- Unlock Pattern Enable:** A dropdown menu set to "Enable" with a "Draw" button next to it.
- Apply:** A blue button at the bottom right.

Language: Choose an available OSD language

Device ID: Input the device ID in the parentheses. Default ID is 000000. View more about Device ID on **5.7.1. General**.

New Admin Password: To set your own password. The password must be a combination of 8 to 16 characters, which is combined with at least 2 kinds of different characters from uppercase letters, lowercase letters, digit numbers and special symbols.


Confirm Password: Enter the password again. **Unlock Pattern :** Select **Enable** to draw your pattern lock.

Click **Apply** to confirm your settings. The system will require to set the password recovery questions in case you forget the password.



Tick the box of **Security Question Configuration**, and then choose 3 questions and input your answer to each question. If you tick the box of **Certificate of Authorization**, you need to click the **Export** button to save a secret key to your USB flash drive. It will help to reset the password with the secret key in future.

Super code: It is a backup method to reset your password. If you enable this function, a temporary & time-bound super code will be able to generated by the authorized dealer. It is allowed to login the system with the super code and create your new password. However, the super code is not recommended to be enabled for safety reason.

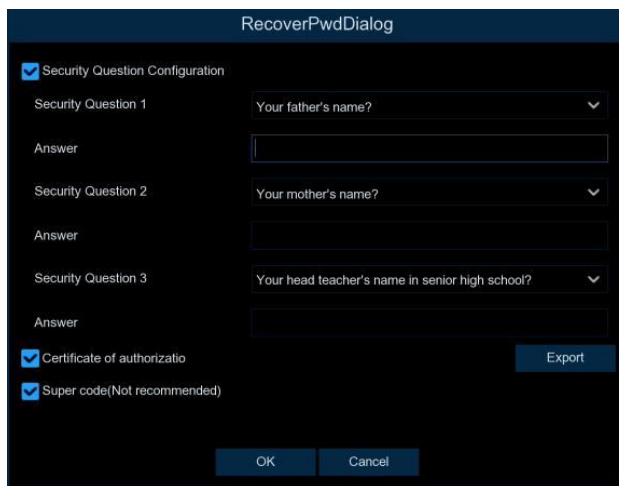

RecoverPwdDialog

☒ Security Question Configuration

Security Question 1: Your father's name? ▼

Answer:

Security Question 2: Your mother's name? ▼

Answer:

Security Question 3: Your head teacher's name in senior high school? ▼

Answer:

☒ Certificate of authorization Export

☒ Super code(Not recommended)


OK Cancel

3.3.2. Reset Password

If you forget your password, you will be unable to login the system, reset your password with below methods:

3.3.2.1. Reset with password recovery questions

If you had enabled the password recovery questions in **3.3.1. Password Generation**, you are able to reset your password with security questions. 1. Click the **Forgot Password** button on the login window.

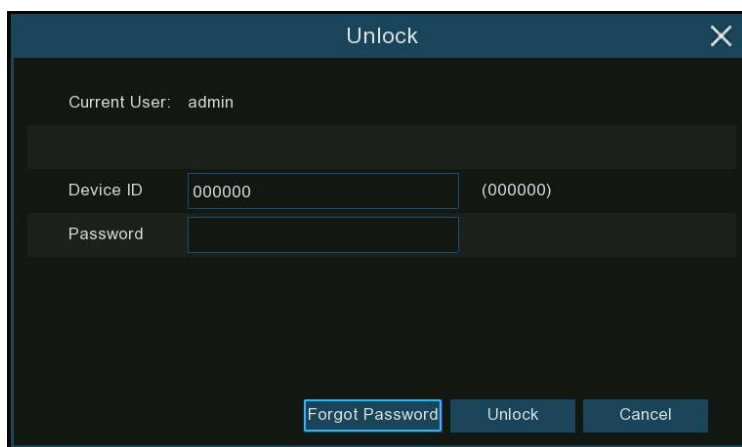

Unlock


Current User: admin

Device ID: (000000)

Password:

Forgot Password Unlock Cancel

2. Choose **Security Question Verification**. Input the answer to each question and then input new password. Click **OK** to activate the new password.

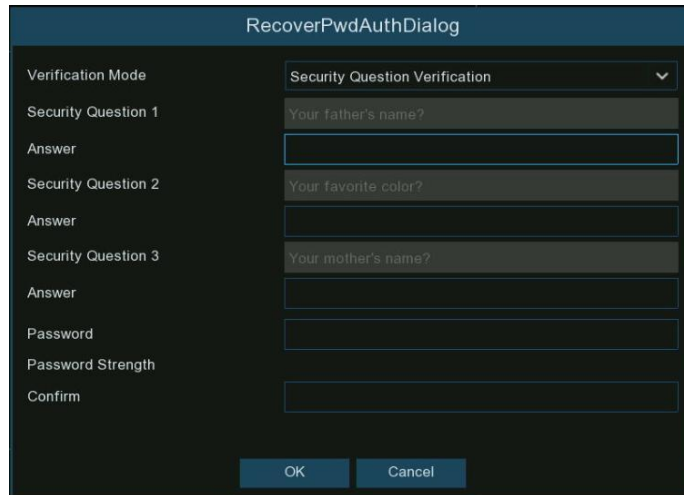

RecoverPwdAuthDialog

Verification Mode: Security Question Verification

Security Question 1: Your father's name?

Answer:

Security Question 2: Your favorite color?

Answer:

Security Question 3: Your mother's name?

Answer:

Password:


Password Strength:

Confirm:

OK Cancel

3.3.2.2. Reset with secret key

If you had exported the secret key in **3.3.1. Password Generation**, you are able to reset your password with secret key. 1. Click the **Forgot Password** button on the login window.

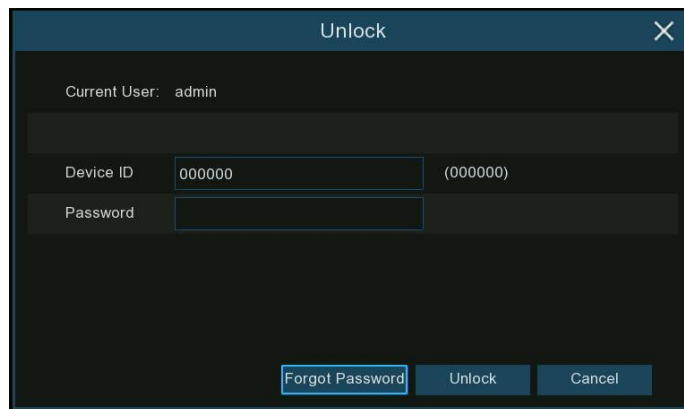

Unlock


Current User: admin

Device ID: 000000 (000000)

Password:

Forgot Password Unlock Cancel

2. Choose **Certificate of Authorization**. Click **Import** button to load the secret key from your USB flash drive, and then input new password. Click **OK** to activate the new password.

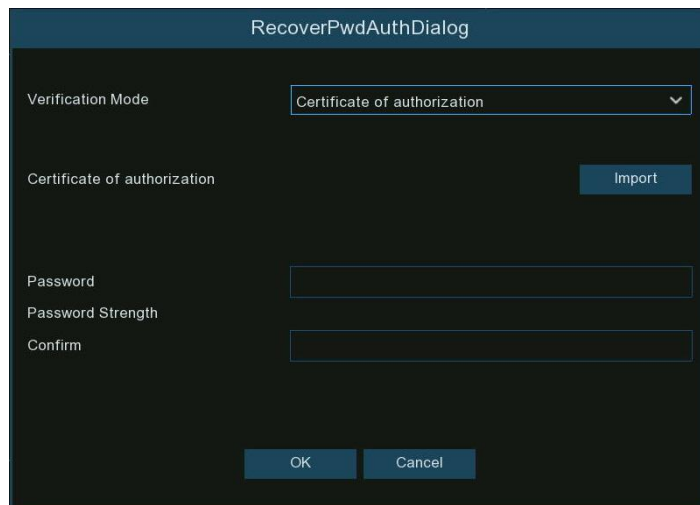

RecoverPwdAuthDialog

Verification Mode: Certificate of authorization

Certificate of authorization: Import

Password:


Password Strength:

Confirm:

OK Cancel


3.3.2.3. Reset with Super Code

If you had activated the Super Code in **3.3.1. Password Generation**, you are able to reset your password with super code. 1. Click the **Forgot Password** button on the login window.

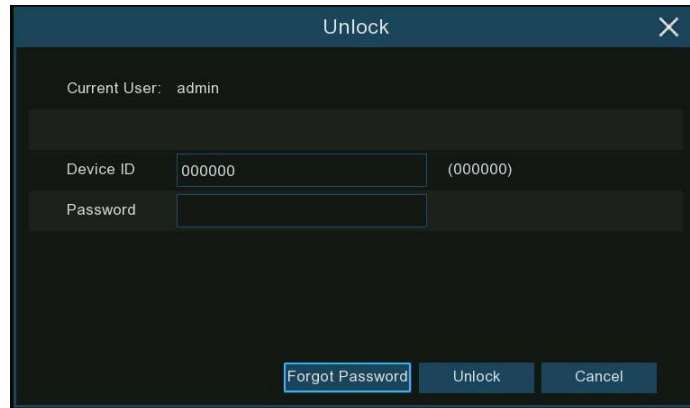

Unlock dialog box showing the current user as 'admin'. It includes input fields for Device ID (000000) and Password. At the bottom, there are buttons for 'Forgot Password', 'Unlock', and 'Cancel'.


2. Choose **Super Code**. 3. Provide the date and MAC address information to the authorized dealer. 4. Input the Super code you get from the authorized dealer, and then input new password. Click **OK** to activate the new password.

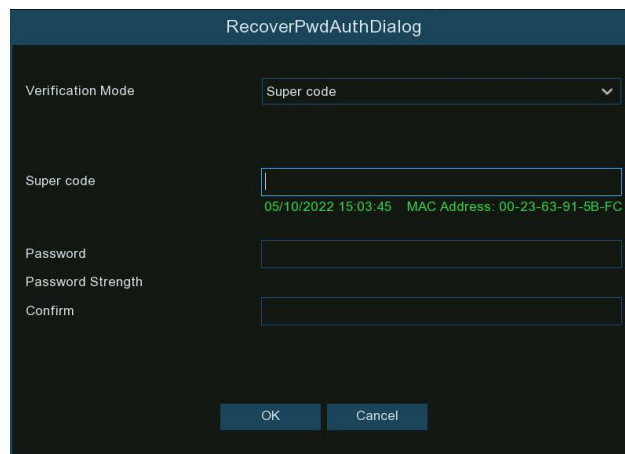

RecoverPwdAuthDialog box. It shows a 'Verification Mode' dropdown set to 'Super code'. Below it, there is a 'Super code' input field, a 'Password' input field, and a 'Confirm' input field. A green status bar displays '05/10/2022 15:03:45 MAC Address: 00-23-63-91-5B-FC'. At the bottom, there are 'OK' and 'Cancel' buttons.

3.3.2.4. Hard Reset

If you are unable to reset the password with any one of the methods of A, B and C, you can try to hard reset your NVR if there is a Reset button on the rear panel.

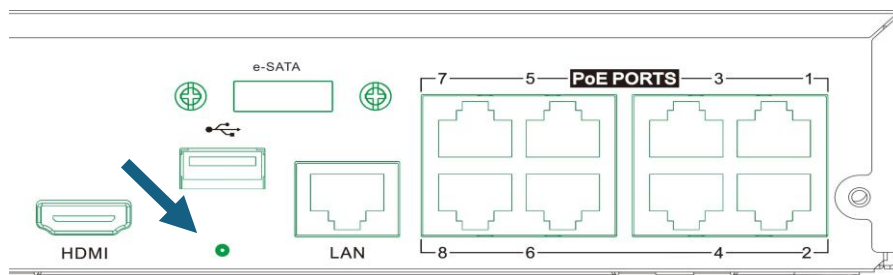


Reset Press and hold 10 seconds on the button with a small pin till the NVR beeps.

Note: The hard reset will not only reset the password but will also load all system settings to default value. Your self-defined settings will be lost.

Chapter 4. NVR Starting Up

4.1. Start Wizard

For the first time when you run this NVR, you may need to configure the Startup Wizard which will help to configure the system and get your NVR working properly and quickly.

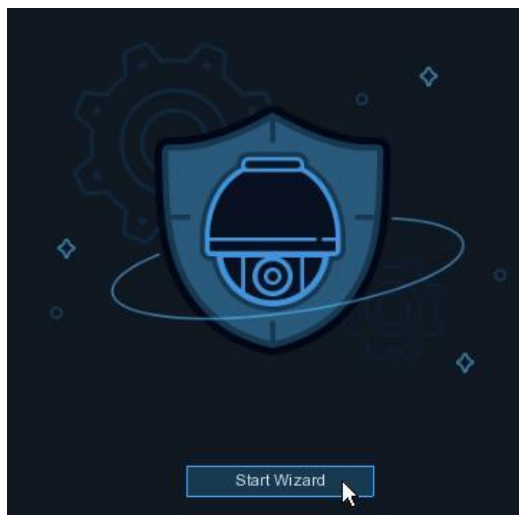

Log in to the system and click the **Start Wizard** to proceed to the next step.

4.1.1. Network Configuration

If you connect to a router that allows to use DHCP, please tick the **DHCP** box. The router will assign automatically all the network parameters for your NVR. Unless the network is manually addressed below parameters:

IP Address: The IP address identifies the NVR in the

Network			
Local Connection			
DHCP	☒		
IP Address	192.168.001.100		
Subnet Mask	255.255.255.000		
Gateway	192.168.001.001		
IPv6 Address	2000:0:0:0:0:0:1	/	064
IPv6 Gateway	2000:0:0:0:0:0:1		
DNS			
DNS1	192.168.001.001		
DNS2	008.008.008.008		
Port			

network. It consists of four groups of numbers between 0 to 255, separated by periods. For example, "192.168.001.100".

Subnet Mask: Subnet mask is a network parameter which defines a range of IP addresses that can be used in a network. If IP address is like a street where you live then subnet mask is like a neighborhood. The subnet address also consists of four groups of numbers, separated by periods. For example, "255.255.000.000".

Gateway: This address allows the NVR to access the Internet. The format of the Gateway address is the same as the IP Address. For example, "192.168.001.001". IPv6 Address: Input the IPv6 address you got from your ISP.

DNS1/DNS2: DNS1 is the primary DNS server and DNS2 is a backup DNS server. Usually, it should be enough just to enter the DNS1 server address.

Port

Port							
		Service	Protocol	Internal Port	External Port	UPNP Status	Mapping
1		Http/Https/RTSP	TCP	00080	00080	Inactive	Auto
2		Client	TCP	09000	09000	Inactive	Auto

http/https/rtsp: This is the port that you will use to log in remotely to the NVR (e.g. using the Web Client), or the NVR will be allowed to transmit real-time streaming to other device (e.g. using a streaming Media player.). The ONVIF is using the same port also. If the default port 80 is already taken by another application, please change it.

Client: This is the port that the NVR will use to send information through (e.g. using the mobile app). If the default port 9000 is already taken by other applications, please change it.

Port							
		Protocol	Internal Port	External Port	UPNP Status	Mapping Strategy	UPNP
	RTSP	TCP	00080	00080	Inactive	Auto	☒
		TCP	09000	09000	Inactive	Auto	☒


Internal Port: Mainly used for LAN connection.

External Port: Mainly used for WAN / Internet connection.

UPNP: If you want to log in remotely to the NVR using Web Client via different router/LAN, you need to complete the port forwarding in your router. Enable this option if your router supports the UPnP. In this case, you do not need to configure manually port forwarding on your router. If your router does not support UPnP, make sure the port forwarding is completed manually in your router.

Mapping Strategy: If you want the port randomly distributed by the router UPnP server, choose **Auto**; If you want to manually forwarded the port, choose **Manual**.

PPPoE: This is a protocol that allows the NVR to connect to the network directly via a DSL modem. Tick the **Enable PPPoE** box, and then enter the User name & Password of the PPPoE which is provided by your ISP.

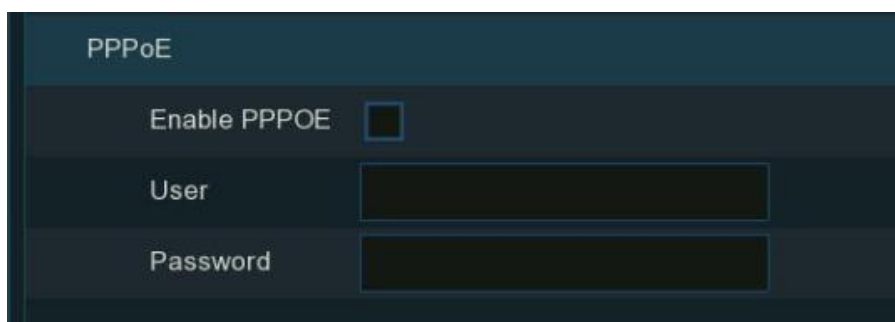

4.1.2. Date/Time

This menu allows you to configure the Date, Time, Date Format, Time Format, Time Zone, NTP and DST. **Date/Time** Click on the calendar icon to set the current system date.



Date: Click on the calendar icon to set the system date.

Time: Edit the system time.

Date Format: Choose from the dropdown menu to set preferred date format.

Time Format: Choose time format between 24Hour and 12Hour.

Time Zone: Choose your time zone.

NTP NTP stands for Network Time Protocol. This feature allows you to synchronize the date and time automatically on the NVR over Internet. Therefore, the NVR needs to be connected to the Internet. Tick the "**NTP**" box, and select the NTP server.

Date/Time

Date and Time
NTP
DST

Enable NTP
☒

Server Address
pool.ntp.org

Update Now

DST DST stands for Daylight Savings Time.

Date and Time
NTP
DST

Enable DST
☒

Time Offset
1Hour

DST Mode
Week

Start Time
Mar.
The 2nd
Sun.
02:00:00

End Time
Nov.
The 1st
Sun.
02:00:00


Enable DST: Tick to enable if Daylight Saving Time (DST) is observed in your region

Time Offset: Select the amount of time to offset for DST

DST Mode: Choose to set the daylight-saving time in weeks or in days **Start Time/End Time:** Set the start time and end time for daylight saving

4.1.3.2. Add IP Camera to PoE NVR from LAN

If you want to add an IP camera to the PoE NVR from LAN, please make sure your NVR is well-connected to the LAN, and the IP camera you want to add is in the same network segment with your NVR. in the channel you want to add, and then click the drop-down arrow next to Switch Mode to select **Manual** 1. Click the edit icon and click **OK** to save.

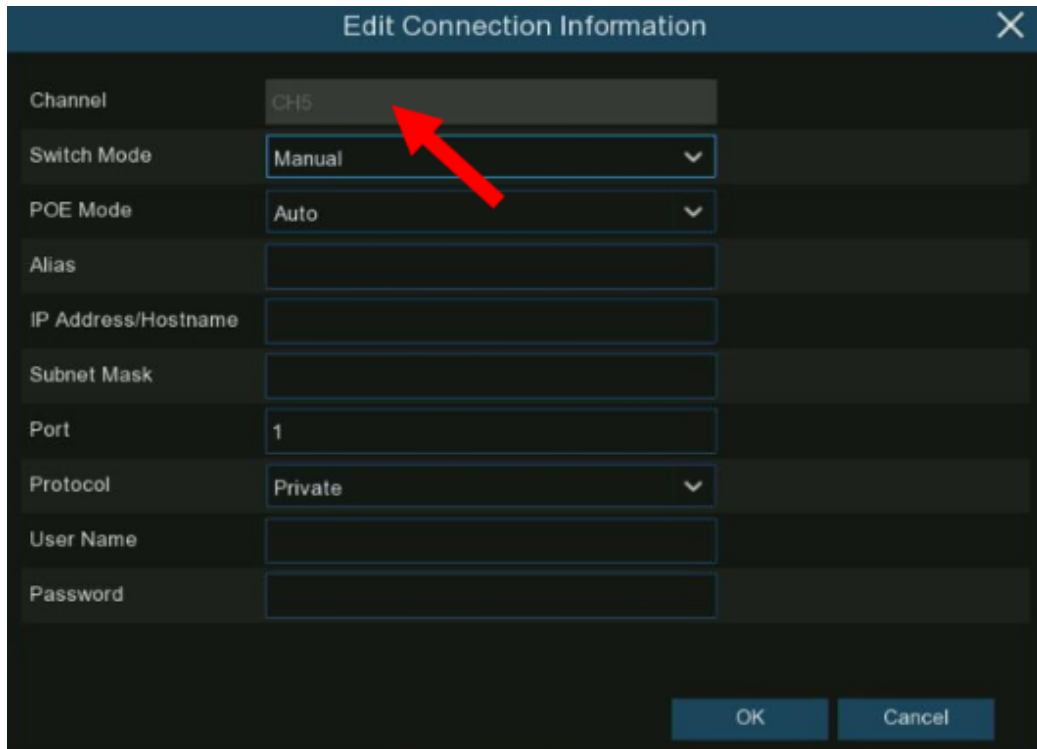


Edit Connection Information

Channel	CH5
Switch Mode	Manual
POE Mode	Auto
Alias	
IP Address/Hostname	
Subnet Mask	
Port	1
Protocol	Private
User Name	
Password	

OK Cancel

2. Click the **Search** button on the left bottom corner of the window, all available cameras in the LAN will be displayed. Select the camera you want to add, then click the add icon . in the channel list and then click **Search** button, all available cameras in the LAN will be displayed. Click on Or click the Add icon the camera you want to add. 3. Input the user name and password of the camera, and then click **Add** button to complete.

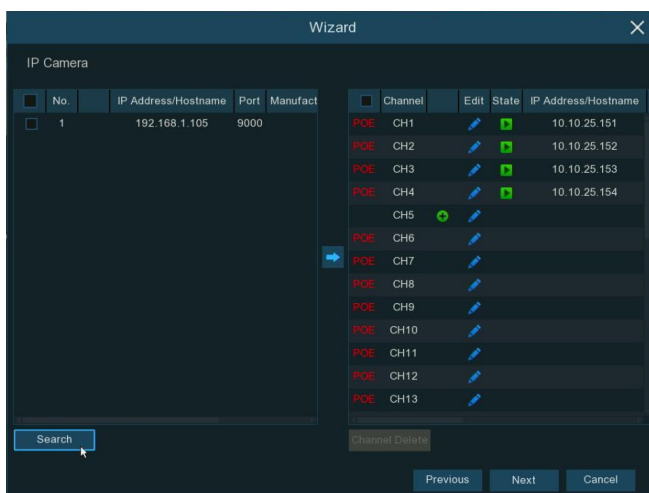

Wizard

IP Camera


No.	IP Address/Hostname	Port	Manufact
1	192.168.1.105	9000	

Search

Channel	Edit	State	IP Address/Hostname
POE CH1			10.10.25.151
POE CH2			10.10.25.152
POE CH3			10.10.25.153
POE CH4			10.10.25.154
CH5			
POE CH6			
POE CH7			
POE CH8			
POE CH9			
POE CH10			
POE CH11			
POE CH12			
POE CH13			

Channel Delete

Previous Next Cancel

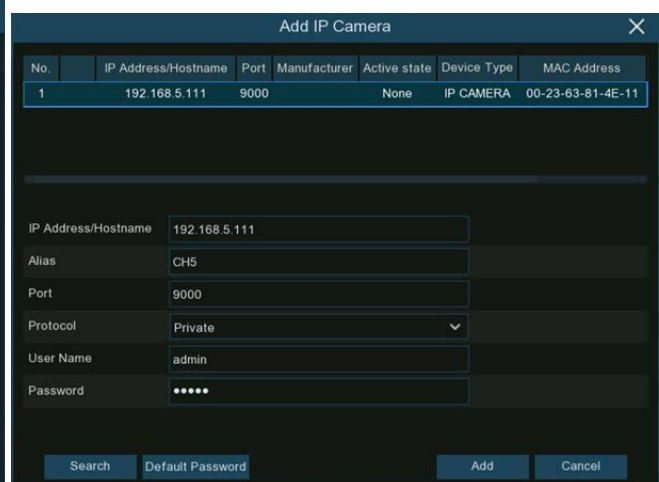

Add IP Camera

No.	IP Address/Hostname	Port	Manufacturer	Active state	Device Type	MAC Address
1	192.168.5.111	9000		None	IP CAMERA	00-23-63-81-4E-11

IP Address/Hostname: 192.168.5.111

Alias: CH5

Port: 9000

Protocol: Private


User Name: admin

Password:

Search Default Password Add Cancel


4.1.3.3. Add IP Camera to PoE NVR from Internet

If you want to add an IP camera to the PoE NVR from internet, please make sure your NVR is well-connected to internet. in the channel you want to add, and then click the drop-down arrow next to Switch Mode to select **Manual** 1. Click the edit icon and click **OK** to save.

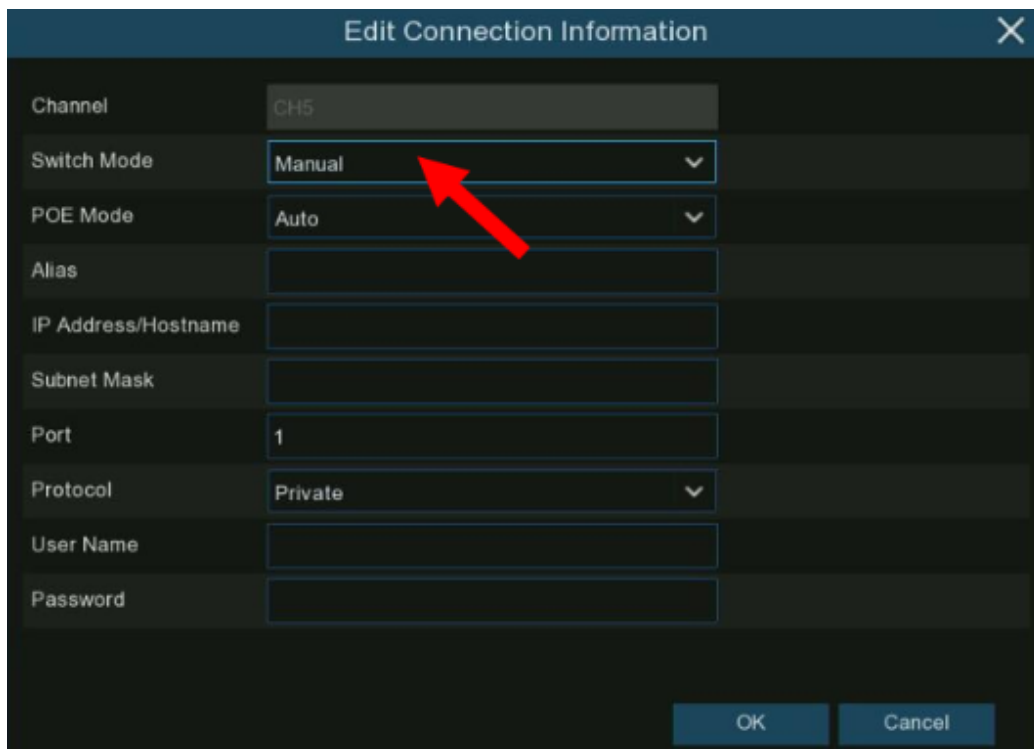

Channel	CH5
Switch Mode	Manual
POE Mode	Auto
Alias	
IP Address/Hostname	
Subnet Mask	
Port	1
Protocol	Private
User Name	
Password	

2. Click the Add icon in the channel list.

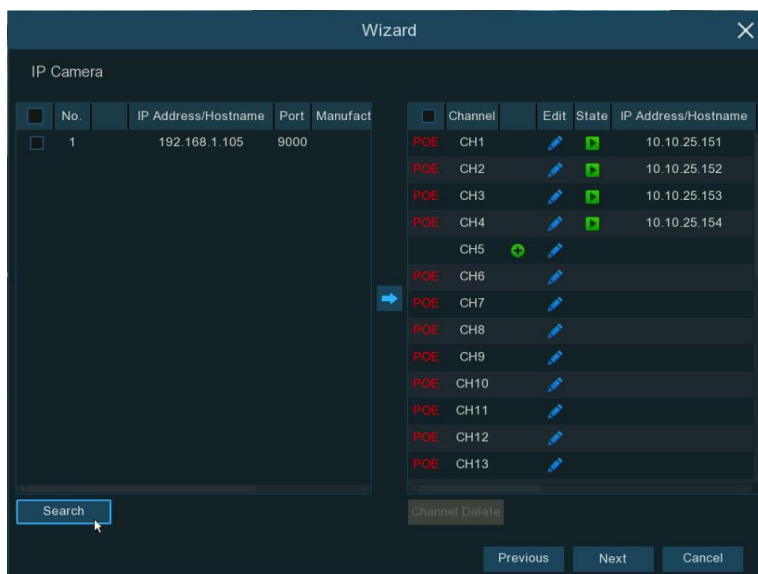

No.	IP Address/Hostname	Port	Manufact
1	192.168.1.105	9000	

Channel	Edit	State	IP Address/Hostname
POE CH1			10.10.25.151
POE CH2			10.10.25.152
POE CH3			10.10.25.153
POE CH4			10.10.25.154
CH5			
POE CH6			
POE CH7			
POE CH8			
POE CH9			
POE CH10			
POE CH11			
POE CH12			
POE CH13			

Input the IP camera's internet IP address, port, protocol, user name and password. Click **Add** button to complete. 3.


IP Address/Hostname	222.87.42.87
Alias	CH5
Port	9000
Protocol	Private ▼
User Name	admin
Password	••••

4.1.3.4. Add IP Camera to Non-PoE NVR

For Non-PoE NVR, you need to add the IP cameras from LAN and/or Internet manually. Please refer to **4.1.3.2. Add IP Camera to PoE NVR from LAN** & **4.1.3.3. Add IP Camera to PoE NVR from Internet**.

4.1.4 Disk

HDD must be formatted If it is installed in the NVR for the first time. Select the HDD and then click **Format HDD** button to format the HDD.

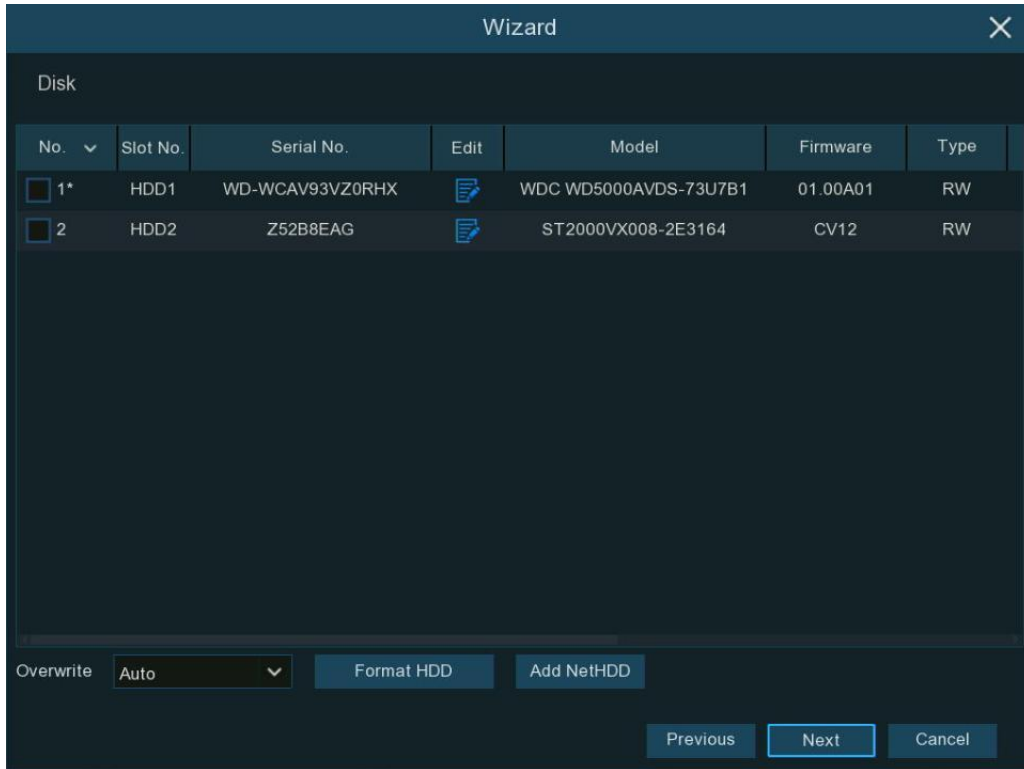


Overwrite: This instructs your NVR to overwrite the oldest video files as the hard drive becomes full. You also have the option of selecting the amount of days for recordings to be kept before they are overwritten. For example, if you choose the option 7 days then only the last 7 days' recordings are kept on the HDD. To prevent overwriting any old recordings, select **OFF**. If you have set Off on this feature, please check the HDD status regularly to make sure the HDD is not full. Recording will be stopped if HDD is full. We recommended leaving the **Auto** selection as this prevents your NVR from running out of storage space.

Add NAS HDD: To add your NAS disk.

Record On e-SATA: If your NVR comes with an e-SATA port on the rear panel, you can enable to record the video to e-SATA HDD. This function only available when your e-SATA HDD has been connected to the NVR already.

4.1.5. Resolution


Choose an output resolution matches to your monitor. The NVR supports to adjust the output resolution automatically to match the best resolution of your monitor when the system is starting up.

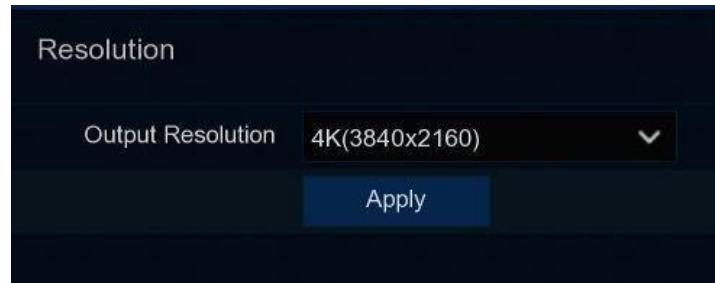

If you connect to a 4K HDMI monitor, you are able to choose max. 4K (3840x2160) resolution. If you connect a VGA monitor, do not choose the resolution larger than 1080P(1920x1080).

4.1.6. Mobile

If your NVR come with a P2P ID, you can scan the QR code with your mobile app to view the NVR remotely.

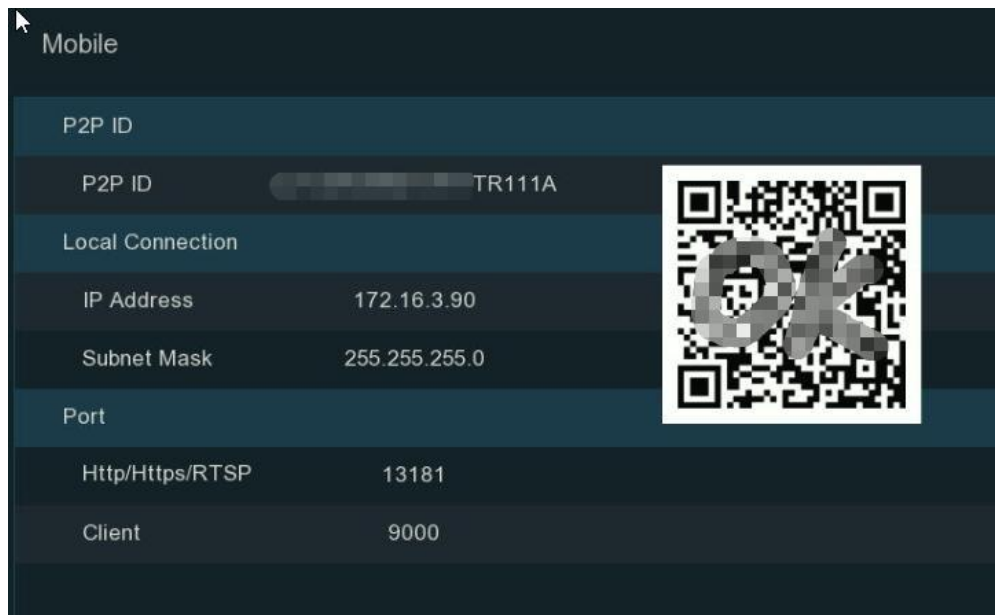

4.1.7. Summary

You can tick the system summary information you had set in the start wizard and finish the wizard. Tick "**Don't show the Wizard after start.**" if you don't want to display the Start Wizard after the system start. Click **Finish** button to save & exit.

Summary

System	
Resolution	1080P(1920x1080)
Date/Time	05/12/2022 09:00:04, GMT+08:00
NTP	OFF


Network	
DHCP	OFF
IP Address	172.16.3.90
Subnet Mask	255.255.255.0
Gateway	172.16.3.1
DNS1	192.168.5.1
DNS2	8.8.8.8
PPPoE	OFF

☐ Don't show the Wizard after start.

Previous

Finish

4.2. Live View Screen Overview

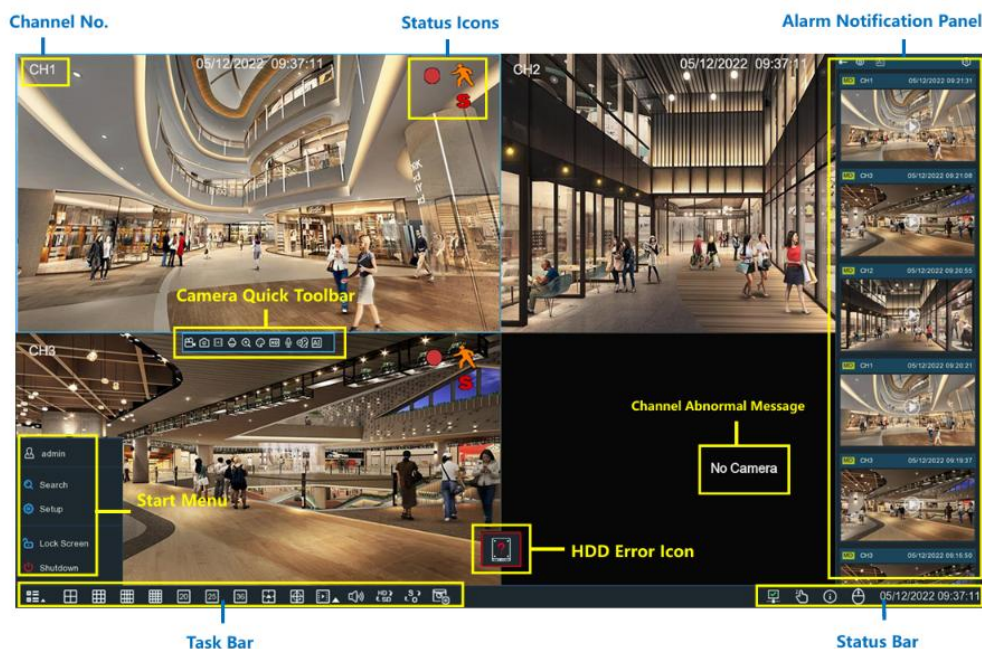

4.2.1. Definitions of On-screen Icons & Messages

Status icons

Icon	Meaning
	The camera is being recorded currently
	A motion alarm is happening
	An intelligent o rAi alarm is happening
	The external I/O alarm device is being triggered
	The PIR alarm is being triggered

HDD error icons

Icon	Meaning
	HDD is uninstalled or in error

	HDD is unformatted
	HDD is full
	HDD is read-only

Channel Abnormal Message

Message	Meaning
No Camera	No camera is added to this channel. You can click the add icon + to add a new camera.
Failed to connect to camera, please check the network connection!	The added camera is off-lined or lost connection. Please check the camera working status or network connection. You can click the edit icon to check the camera status.
User name or password error!	Incorrect user name or password of the camera. Click the edit icon to modify.
Resource Not Enough	No enough system resource to decode the camera images, please try to change the cameras to sub-stream mode; If there are 2 or more cameras are using MJPEG decoding, only 1 camera can be encoded at the same time.
No enough bandwidth for this camera!	The camera cannot get online because the total bitrate of all connected cameras exceeds the NVR's bandwidth limitation.

4.2.2. Camera Quick Toolbar

In live viewing, click the left button of your mouse on a connected camera to display the Camera Quick Toolbar.




Icon	Meaning
	Click to manually record the channel immediately. If the manually recording is in process, the icon will be in red color. Click one more time to stop manual record.
	Click to save a snapshot of the current camera image. Manual Capture must be enabled to use this feature. For details on enabling Manual Capture, see 5.2.3.1 Capture .
	Click to play the latest 5 minutes recording of this channel
	Click to enter PTZ control panel; Click to control zoom and focus of motorized varifocal lens
	Click to zoom-in the channel. Scroll the wheel button of your mouse to zoom in and zoom out the image.
	Click to adjust the image color of the channel.
 	To switch the live view video stream between HD & SD. HD is mainstream images, SD is substream images.
	Click this button to enter fisheye mode. To use this button, device support is required and a fisheye camera should be connected first.
	Click to start two-way voice communication
	If your camera has white light LEDs, click this button to turn on or turn off the LEDs.
	If your camera has a built-in speaker, click this button to turn on or turn off the alarm sound.
	If your camera has warning light LEDs, click this button to turn on or turn off the LEDs.
	Tag button. It supports to fast search by adding a tag in live view. See more on 7.5 Tag Search .
	AI statistics. Hover the mouse upon the icon to view AI statistics when the AI function is activated in your NVR.

4.2.3. Taskbar

In the Taskbar, you are able to enter the system menu, start playback and change the live view display, etc.



Icon	Meaning
	Click to pop up the Start Menu
	Click to display 4/9/12/16 channels in live view screen
	Click to display 20/25/36 channels in live view screen
	Click to choose more display layouts in live view screen
	Click to start viewing channels in a sequence. You're able to set the sequence display mode on 5.8.1.4 Output Configuration .
	Quick playback. You can choose to play the recording for all channels from the beginning of the day, or you can choose the play the latest 5 seconds, 10 seconds, 30 seconds, 1 minute or 5 minutes by clicking the triangular button .
	Click to adjust audio output volume
	Click to switch the live view image resolution for all channels between mainstream and substream.
	Click to switch the image scale for all channels between original and stretch.
	Click to switch among real-time, balanced, or smooth view. It affects the live view video quality by changing the bitrate and frame rate.
	Click this button to restore the scrambled channel positions.

4.2.4. Status Bar

In the Status Bar, you are able to check the network connection status, turn on/off white light LEDs and alarm sound, start and stop manual record, check the system information, disable mouse and system time.



Icon	Meaning
	Fan status is normal fan status is normal
	Fan status is normal fan status is abnormal
	Network is disconnected.
	Network is connected but offline.
	Network is well connected.
	The device is in arming status.
	The device is in disarming status.
	To turn on or turn off all the white light LEDs and alarm sound for available cameras.
	To operate manual record and manual relay alarm output
	To view system information, channel information, record info and network state.
	The device is connected through USB_ WIFI and is recognized successfully. It can access the Internet through WiFi. For more information, see Section 5.5.1.4.
	Click this button to switch the mouse between the primary screen and the secondary screen. To use this button, device support is required.

4.2.5. Start Menu

With the Start menu, you can switch user, search & playback, enter system setup menu, lock & unlock the screen, shut down, reboot & logout the system.

	Item	Description
 admin		To switch user. To enable multi-user, please view on 5.7.2. Multi-user .
 Search		Search & Playback. View more on Chapter 7. Search, Playback & Backup .
 Setup		NVR System Setup. View more on Chapter 5. System Setup
 Lock Screen		Lock & unlock screen.
 Shutdown		Shutdown, reboot & logout the system.


Unlock and Lock Screen The screen will be locked automatically to protect unauthorized OSD operation while the NVR is not in menu operation if you have set a Menu Timeouts in **5.7.1.1 System General Setting**. If necessary, you can also lock the screen operation manually. Go to Star Menu, and then click the Lock Screen icon to lock the system immediately. If the system is locked, you can click the Unlock icon to unlock the system for further operation. **Shutdown** Click the **Shutdown** button from Star Menu, you're able to shut down, reboot or logout the NVR. Click **OK** button, system will require to input the user password to authenticate.

4.2.6. Fisheye Camera

After a fisheye camera is added to the device and the device goes online, the fisheye operation icon is displayed in the shortcut menu of the preview channel area and the playback menu. You can click the circle button to open the fisheye-mode operation page.



On the fisheye-mode operation page, click the button on the toolbar at the bottom to open the menu for setting the fisheye camera installation mode. Then, select the mode in accordance with the actual installation mode, and save the setting to make it take effect.

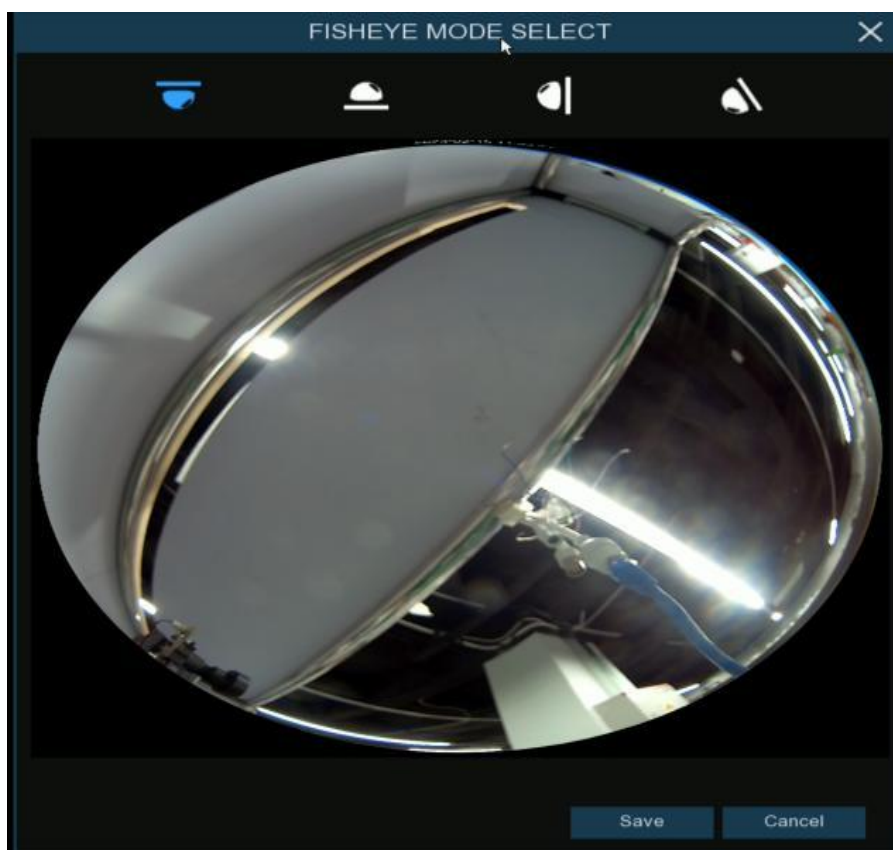

After the corresponding fisheye installation mode is set, the viewing modes supported in the selected installation mode are displayed on the toolbar at the bottom. You can switch the modes as needed and you can also drag and zoom the screen.




4.2.7. Alarm Notification Panel



The Alarm Notification Panel displays thumbnails of alarm events that have occurred. Events are color-coded according to the event type. Use the mouse scroll wheel to scroll up and down (place the mouse cursor over the notification panel first). Click the play button next to or over the thumbnail to play the event.

1. Click to display the notification panel at all times.
2. Click to hide the notification panel.
3. Click to reveal AI statistics information.
4. Click to reveal the Filter and Statistics functions (shown below).

Use the Filter function to customize which alerts and which camera will appear in the notification panel. You can also customize the time duration and channels you want to display in AI statistics.

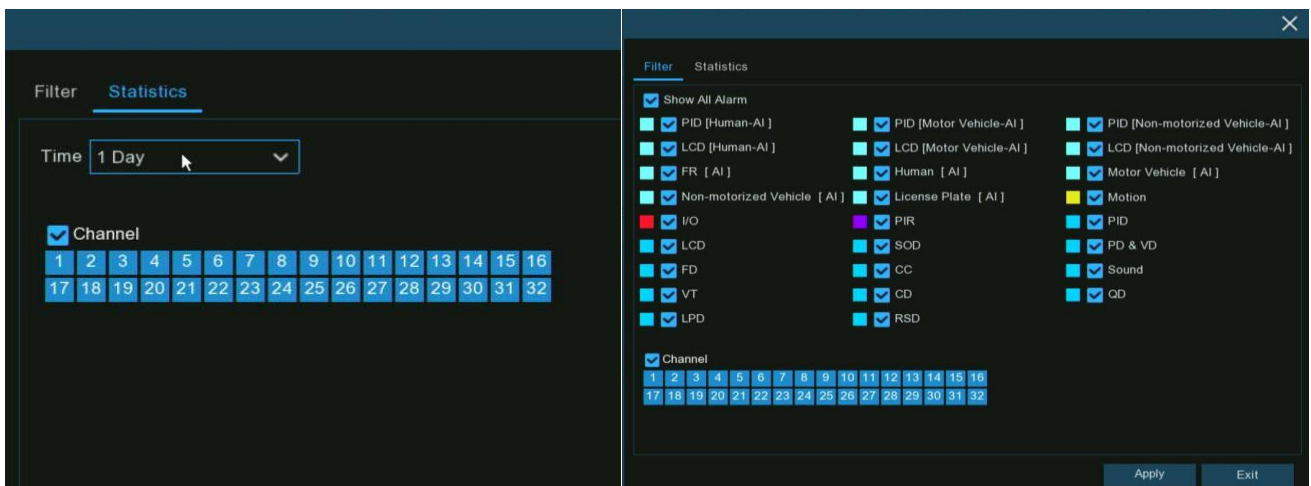


Chapter 5. System Setup

You are able to configure the NVR for Channel, Record, Alarm, Network, Device, System, AI, AI Scenario from **Start Menu - Setup**.



5.1. Channel

In this section, you are able to manage the camera connection, live view display, camera's image, PTZ setup, video cover, motion setup, and more.

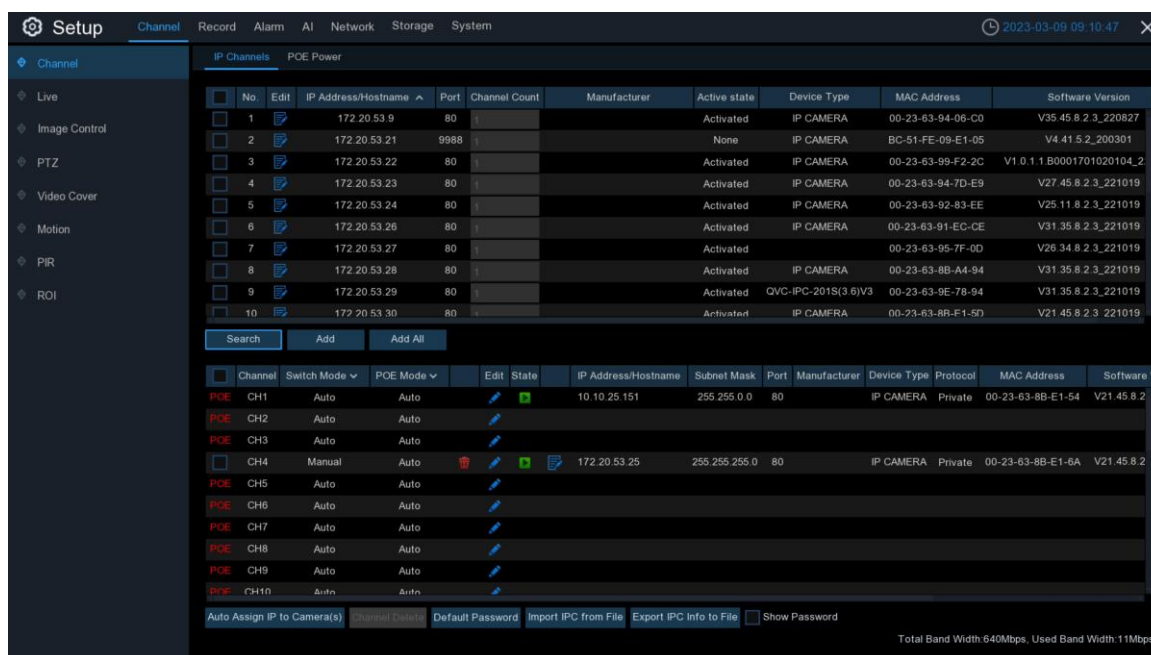

The Channel setup interface displays a list of IP Channels and POE Power settings. The top section shows a table of IP Channels with columns for No., Edit, IP Address/Hostname, Port, Channel Count, Manufacturer, Active state, Device Type, MAC Address, and Software Version. The bottom section shows a table of POE Power settings with columns for Channel, Switch Mode, POE Mode, Edit, State, IP Address/Hostname, Subnet Mask, Port, Manufacturer, Device Type, Protocol, MAC Address, and Software Version.

No.	Edit	IP Address/Hostname	Port	Channel Count	Manufacturer	Active state	Device Type	MAC Address	Software Version
1		172.20.53.9	80	1		Activated	IP CAMERA	00-23-63-94-06-C0	V35.45.8.2.3_220827
2		172.20.53.21	9988	1		None	IP CAMERA	BC-51-FE-09-E1-05	V4.41.5.2_200301
3		172.20.53.22	80	1		Activated	IP CAMERA	00-23-63-99-F2-2C	V1.0.1.1.B0001701020104_2
4		172.20.53.23	80	1		Activated	IP CAMERA	00-23-63-94-7D-E9	V27.45.8.2.3_221019
5		172.20.53.24	80	1		Activated	IP CAMERA	00-23-63-92-83-EE	V25.11.8.2.3_221019
6		172.20.53.26	80	1		Activated	IP CAMERA	00-23-63-91-EC-CE	V31.35.8.2.3_221019
7		172.20.53.27	80	1		Activated	IP CAMERA	00-23-63-95-7F-0D	V26.34.8.2.3_221019
8		172.20.53.28	80	1		Activated	IP CAMERA	00-23-63-8B-A4-94	V31.35.8.2.3_221019
9		172.20.53.29	80	1		Activated	OVC-IPC-201S(3.6)V3	00-23-63-9E-78-94	V31.35.8.2.3_221019
10		172.20.53.30	80	1		Activated	IP CAMERA	00-23-63-8B-F1-5D	V21.45.8.2.3_221019


Channel	Switch Mode	POE Mode	Edit	State	IP Address/Hostname	Subnet Mask	Port	Manufacturer	Device Type	Protocol	MAC Address	Software Version
POE CH1	Auto	Auto			10.10.25.151	255.255.0.0	80		IP CAMERA	Private	00-23-63-8B-E1-54	V21.45.8.2
POE CH2	Auto	Auto										
POE CH3	Auto	Auto										
CH4	Manual	Auto			172.20.53.25	255.255.255.0	80		IP CAMERA	Private	00-23-63-8B-E1-6A	V21.45.8.2
POE CH5	Auto	Auto										
POE CH6	Auto	Auto										
POE CH7	Auto	Auto										
POE CH8	Auto	Auto										
POE CH9	Auto	Auto										
POE CH10	Auto	Auto										

Buttons: Search, Add, Add All, Auto Assign IP to Camera(s), Channel Details, Default Password, Import IPC from File, Export IPC Info to File, Show Password

Total Band Width 640Mbps, Used Band Width 11Mbps

5.1.1.1. Channel

You're able to add and delete IP cameras in this menu. If your NVR comes with PoE ports, you're able to check the PoE power consumption here.

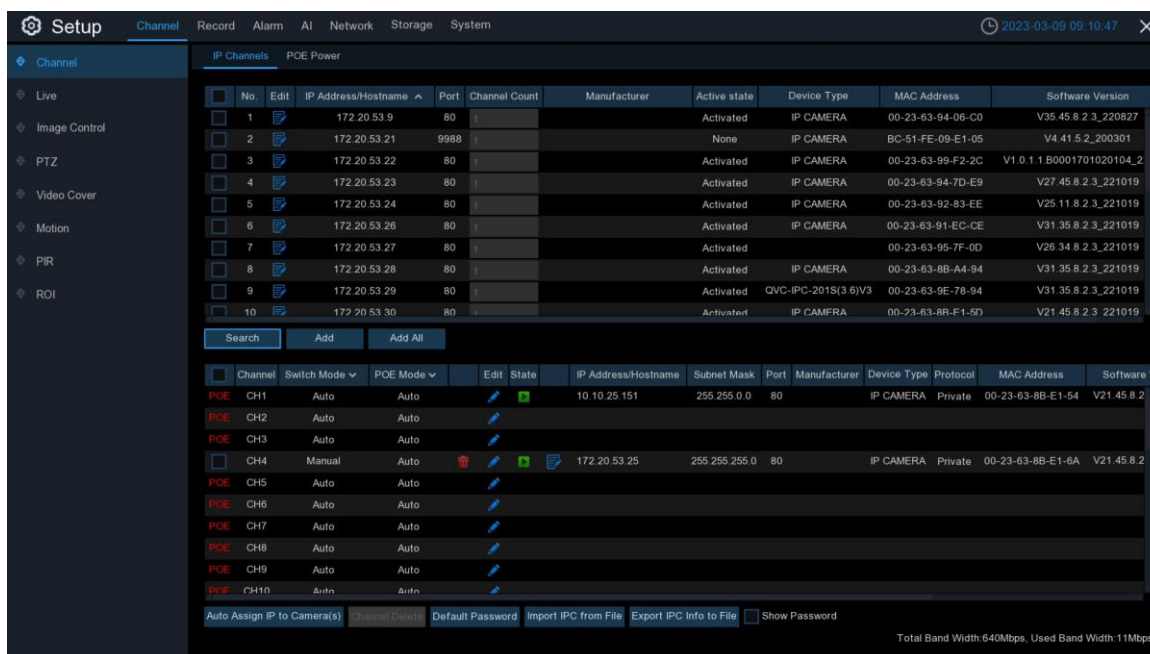


5.1.1.1.1. IP Channels

To add or delete IP cameras here. If your NVR comes with PoE ports, please go to **5.1.1.1.1.1 PoE NVR Connection**; if your NVR comes without PoE port, please go to **5.1.1.1.1.2. Connect External Cameras from LAN or Internet**.

5.1.1.1.1.1. PoE NVR Connection

For the PoE NVR, it is allowed to connect the IP cameras via the internal PoE ports and/or external LAN(WAN) port. PoE not only provides power over ethernet but only supports plug & play connection for IP cameras.

Note: It is not recommended to connect more than 1 camera via switch or router to the PoE port. One PoE port is allowed to connect one IP camera only.

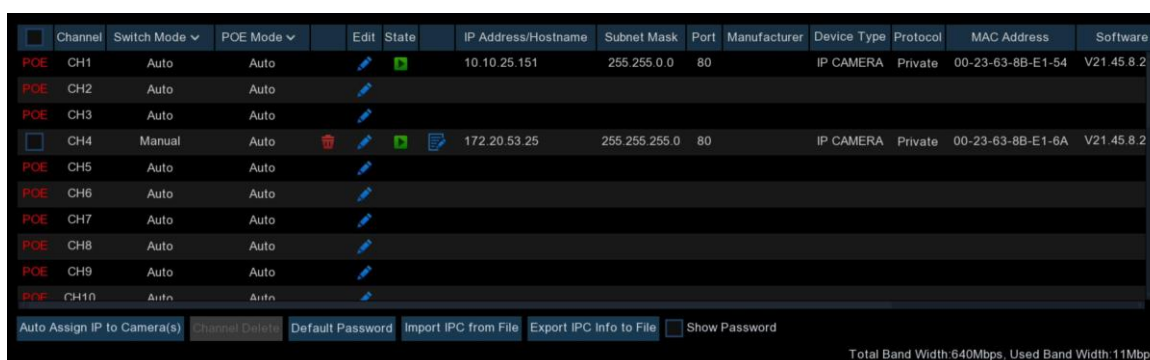


Switch Mode: **Auto** mode supports Plug & Play connection via PoE port. If you want to add camera(s) manually, click the edit icon and then change the mode to be **Manual**, or you can click the drop-down arrow to change all channels to be Auto or Manual mode.

PoE Mode: with **Auto** mode, the maximum bandwidth is limited to 100Mbps. With **ePoE** mode, the maximum bandwidth is limited to 10Mbps and PoE transmission distance will be extended up to 200 meters with RJ45 cable at CAT 5E or above standard. If you have a connection problem with **Auto** mode when the IP camera is powered by PoE via a RJ45 cable longer than 100 meters, then change to ePOE mode for a stable connection. If the video is stuck while in ePoE mode, try to reduce the encoding bitrate.

Edit: To edit the Switch mode, PoE mode, network parameters, user name and password for individual camera.


State: Show the connection status of the camera.

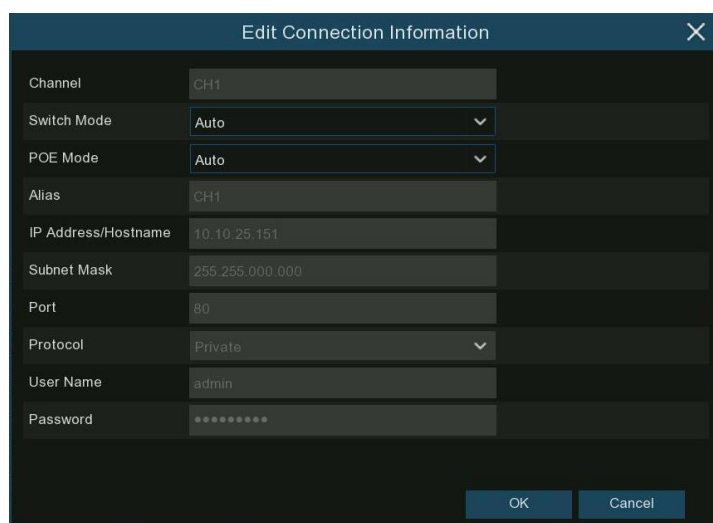

Channel	Switch Mode ▾	POE Mode ▾	Edit	State	IP Address/Hostname	Subnet Mask	Port
CH1	Auto				10.10.25.151	255.255.0.0	9000
CH2	Auto					255.255.0.0	9000
CH3	Auto	Auto				255.255.0.0	9000
CH4	Auto	Auto			10.10.25.154	255.255.0.0	9988


Click on the icon, a message will be pop-up to tell the failure reason.

If the failure reason is "User name or password error", it means the camera user name and password is different from the default user name and password. Click the edit icon and then change to its correct user name and password. If the failure reason is "Failed to connect to camera, please check the network connection", it means the network parameter might be incorrect or incompatible Onvif protocol. Click the edit icon and then change to correct network parameter.

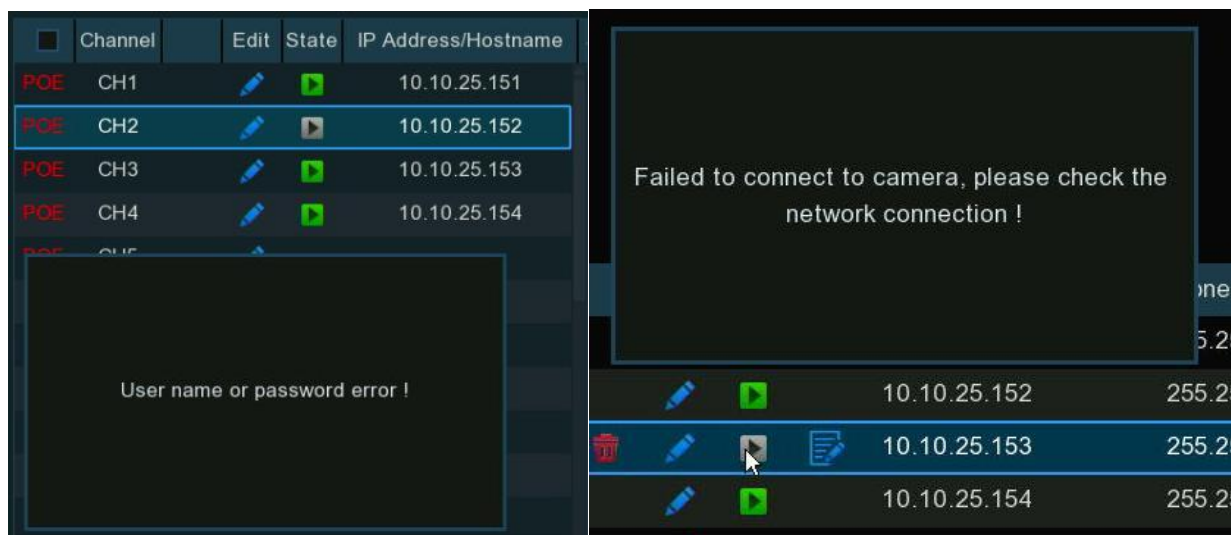

Auto Assign IP to Camera(s): If the camera you want to add manually is not in the same network segment, it might be failed to add the camera. You can use this function to change the IP address of the camera(s).

Default Password To configure the default user name and password of Private, Onvif and RTSP protocol connection. Default password is "admin". Please note, if the user name and password of the camera you added is not same with the default values, you may need to input the user name and password each time after the NVR restarting.

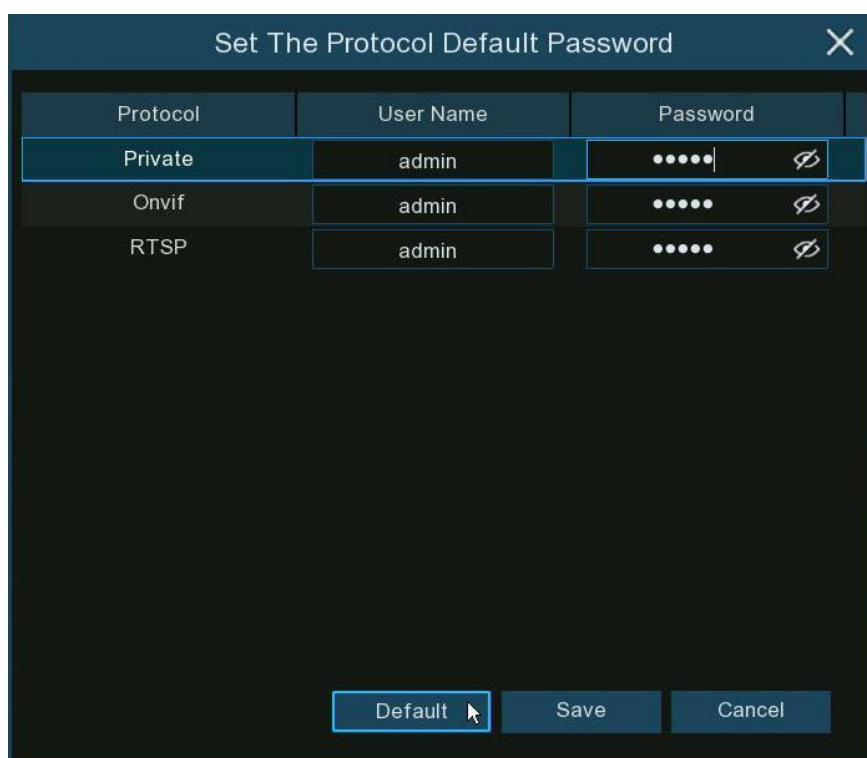

Show Password Tick to show the password of connected IP camera on the channel list.


Edit	State		Password	IP Address/Hostname	Subne
			admin123.	10.10.25.151	255.2
			admin@123	10.10.25.152	255.2
			admin123.	10.10.25.153	255.2
			admin	10.10.25.154	255.2
					

Import IPC from File: Click this button to import IP camera information. It allows you to add IP cameras in batches to a specified channel by importing a CSV file stored on an external storage device. If IP cameras have been added to the channel, after IP camera information is imported, the newly imported IP camera information will overwrite the old information. You can also manually modify the connection parameters of IP cameras in the import information list.

Export IPC Info to File: Click this button to export IP camera information. It allows you to export the channel information of the NVR added with IP cameras in CSV file format to an external storage device.


5.1.1.1.1. Steps to Connect Plug & Play PoE Cameras

1. Keep the default settings.
2. Change the default user name and password to be same with the cameras'.
3. Make sure your IP camera is set to DHCP IP address already. If your camera is set to static IP address which is different from the IP address segment inside the PoE router, your IP camera will be unable to get online. Check more in **5.5.1.1 Network - General**.
4. Connect your IP camera into the PoE port on the rear panel.
5. Camera will be online and displayed in the camera list after its startup.

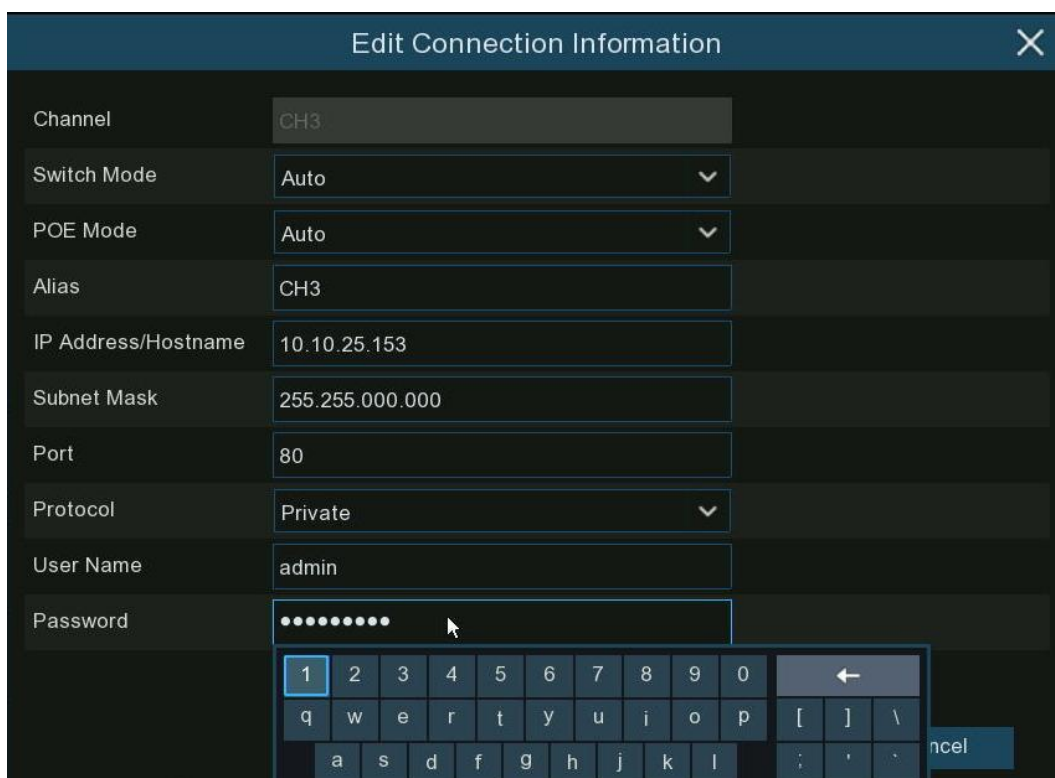


5.1.1.1.1.2. Connect External Cameras from LAN or Internet

If you want to connect to an IP camera from LAN or internet, please make sure your NVR is well-connected to the LAN and or internet. If your NVR come with PoE ports, you need to change the PoE Switch Mode to be manual firstly. If you want to all channels manually, click the drop-down arrow next to Switch Mode, and then select "**Manual**".

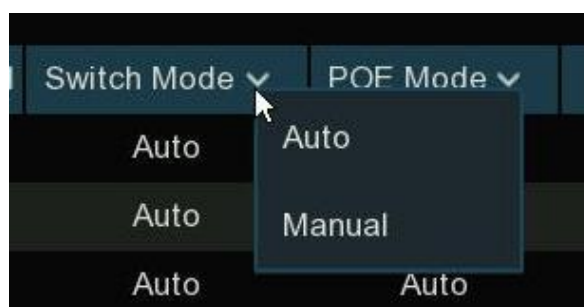


If you want to add an individual channel manually, click the edit icon in the channel list, and then click the drop-down arrow next to Switch Mode to select "**Manual**" and click **OK** to save.

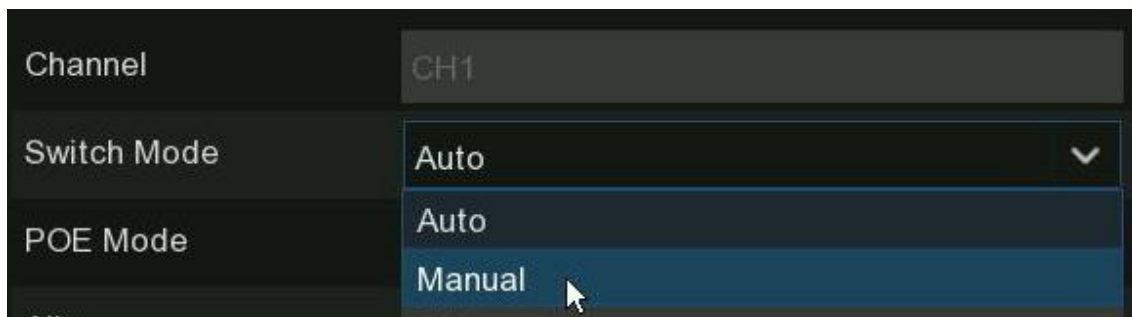


5.1.1.1.2.1. Add Individual Camera in the LAN

1. Change the PoE mode to be Manual.
2. Click **Search** button, all available cameras in the LAN will be displayed.

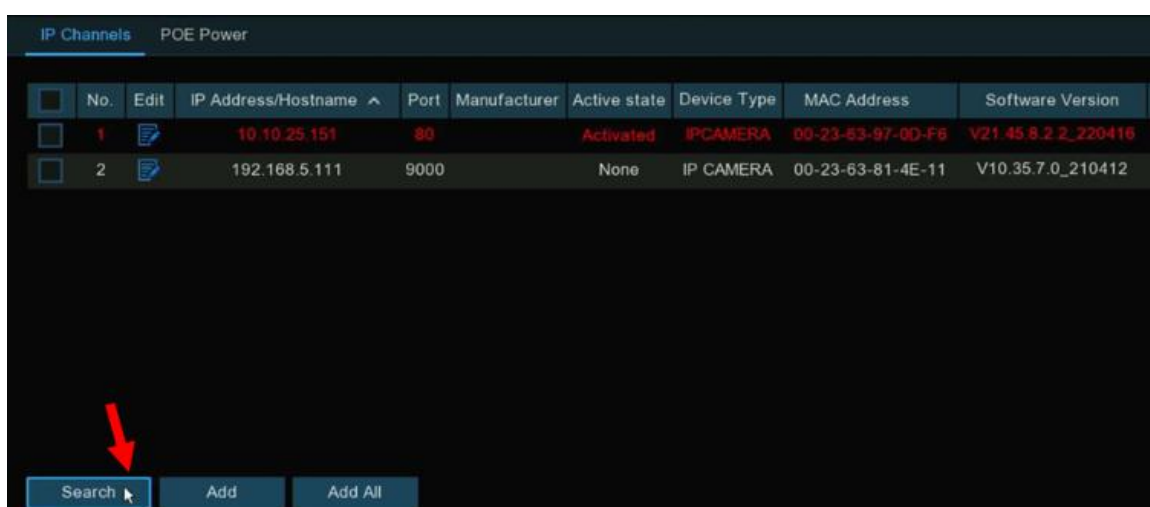

3. Or click the Add icon in the channel list to add a camera to an individual channel. Click Search button, all available cameras in the LAN will be displayed.

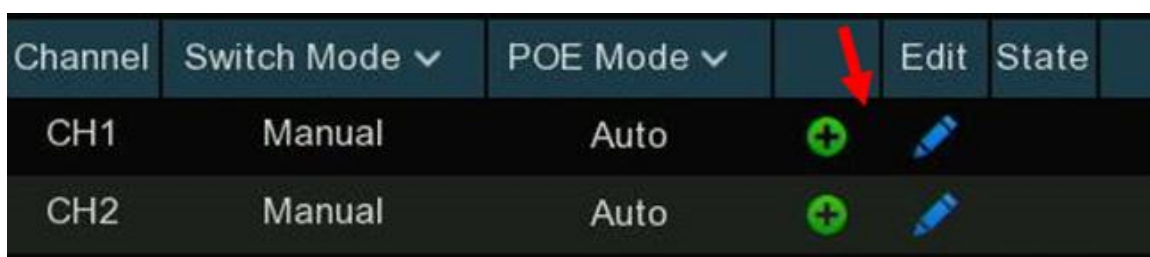

4. Click on the camera you want to connect, and then complete below parameters, and the input the user name and password of the camera and then click Add button.

Add IP Camera ✕

No.	IP Address/Hostname	Port	Manufacturer	Active state	Device Type	MAC Address
1	10.10.25.151	80		Activated	IPCAMERA	00-23-63-97-0D-F6
2	192.168.5.111	9000		None	IP CAMERA	00-23-63-81-4E-11

IP Address/Hostname

Alias

Port

Protocol

User Name

Password

Bind channel

Search
Default Password
Add
Cancel

Alias: To define the camera ID title you want to display in the live view screen.

Port: Camera communication port.

Protocol: To select the connection protocol.

Bind channel: To determine which channel you want to add the camera. Click **Add** button.


5. The added camera will be displayed in the channel list.

Channel	Switch Mode ▾	POE Mode ▾		Edit	State		Password	IP Address/Hostname	Subnet Mask	Port	Manufac
CH1	Manual	Auto					admin	192.168.5.111	255.255.255.0	9000	
CH2	Manual	Auto									

5.1.1.1.2.2. Add Multiplex Cameras in the LAN

1. Click **Search** button, all available cameras in the LAN will be displayed. Or click **Add All** button, the NVR will search & add all available cameras in the LAN.

2. Select the cameras from the search result, and then click **"Add"**. You would need to input the user name and password of the cameras. Please make sure all the cameras you want to add use the same user name and password. Otherwise, the cameras with different user name and password will be unable to get connected.

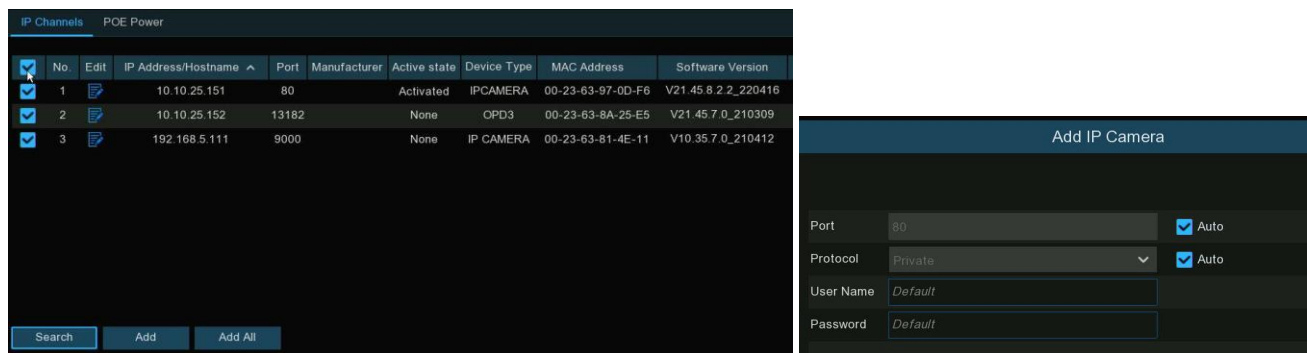


3. The added cameras will be displayed in the channel list.


Channel	Switch Mode	POE Mode	Edit	State	Password	IP Address/Hostname	Subnet Mask	Port	Manufac
CH1	Manual	Auto			admin	192.168.5.111	255.255.255.0	9000	
CH2	Manual	Auto							

5.1.1.1.2.3. Add Cameras from Other NVR in the LAN


1. The NVR allows to add cameras from other NVRs in the local network. Click **Search** button, all available devices in the LAN will be displayed. There is an edit icon displayed if the device is an NVR.

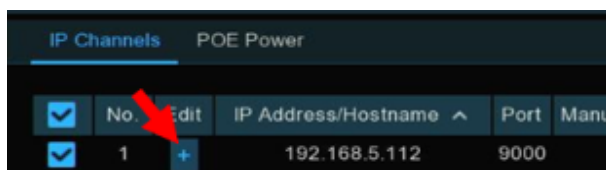

2. Click the edit icon and select the camera channel one by one or tick the box to select all cameras. Click cross icon to go back to search list.



3. Select the NVR in the search list, and then click **Add** button.

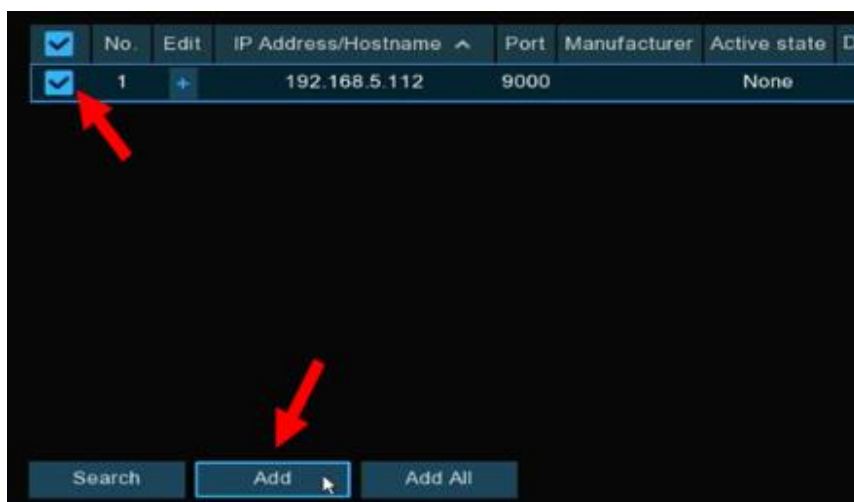

4. Input the user name and password of the NVR and then click **Add** button.

Port	9000	☒ Auto
Protocol	Private	☒ Auto
User Name	admin	
Password	•••••••• 	

 Add Cancel

5. The added cameras will be displayed in the channel list.

Channel	Switch Mode ▾	POE Mode ▾		Edit	State		IP Address/Hostname
CH3	Manual	Auto					192.168.5.112-1
CH4	Manual	Auto					192.168.5.112-2
CH5	Manual	Auto					192.168.5.112-3
CH6	Manual	Auto					192.168.5.112-4

5.1.1.1.1.2.4. Add Cameras from Internet

1. If your NVR is connected to internet, you're able to add cameras from internet with WAN IP address. Click **Add** button in the search page.

IP Channels

POE Power

☐	No.	Edit	IP Address/Hostname	Port	Manufacturer	Ac
Search Add Add All						

2. Input the IP address or domain name, port, protocol, user name & password of the IP camera. Click **Add** button to add the camera.


IP Address/Hostname	127.98.65.134
Alias	CH7
Port	9988
Protocol	Private
User Name	admin
Password	•••••
Bind channel	CH7

5.1.1.1.2. Non-PoE NVR Connection

For Non-PoE NVR connection, please refer to **5.1.1.1.2 Connect External Cameras from LAN or Internet**

5.1.1.2. PoE Power

In this page, you will find the real-time power consumption of each PoE port, total actual power & rated power.

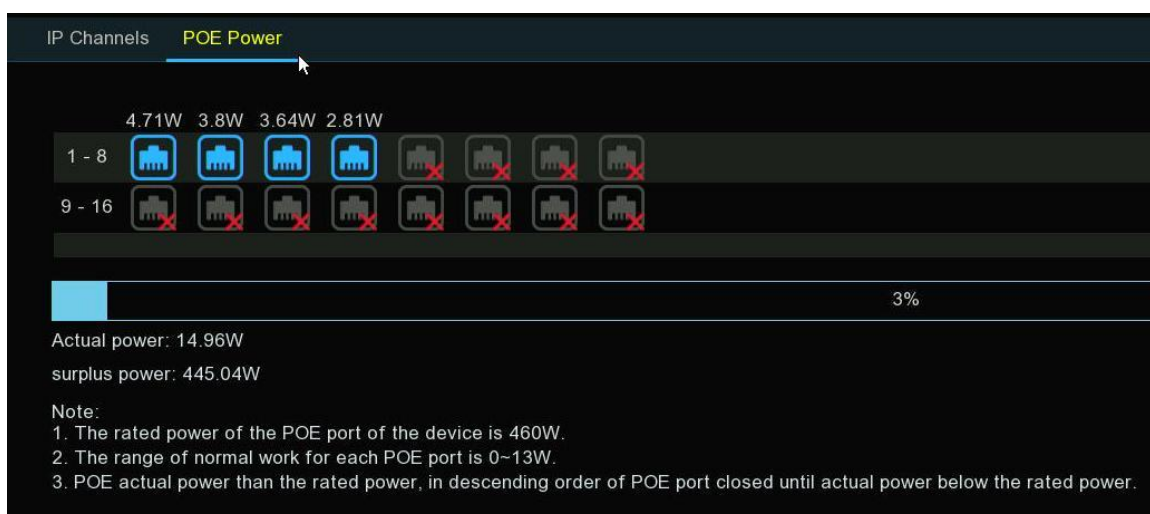

5.1.2. Live

To configure camera parameters, including channel name, color, date & time format, refresh rate, etc.

Setup										
Channel										
Live										
Channel	Setup	Covert	Channel Name	Show Name	Date Format	Time Format	Show Time	Refresh Rate	OSD Self-adaptive	
CH1		☐	98525	☒	YYYY-MM-DD	24 Hour	☒	60Hz	☒	
CH2		☐	Camera	☒	YYYY-MM-DD	12 Hour	☒	60Hz	☐	
CH3		☐	Camera	☒	YYYY-MM-DD	24 Hour	☒	60Hz	☒	
CH4		☐	holiday	☒	MM/DD/YYYY	24 Hour	☒	60Hz	☒	

Convert: To hide the camera images in live view. If the covert is enabled, only live view images will be hidden. Recording images won't be affected. Enable this if your NVR and TV is in a public area (shop, warehouse, etc.), but you don't want others to see an image from the camera.

Channel Name: Give a name to the camera.

Show Name: Leave this enabled to display the camera name in Live View mode, otherwise click the checkbox to disable it. It affects both live view & recording images.

Date Format: To choose a date format.


Time Format: To choose a time format.

Show Time: Leave this enabled, as a timestamp will be embedded on all video recordings. Click the checkbox if you wish to disable it. It affects both live view & recording images.

OSD Self-adaptive: Used to set whether to change the font color of OSD in accordance with the screen background to ensure clear display.

Refresh Rate: Choose the right value according to the frequency of alternating current in your region.

Setup: Click icon for more settings.

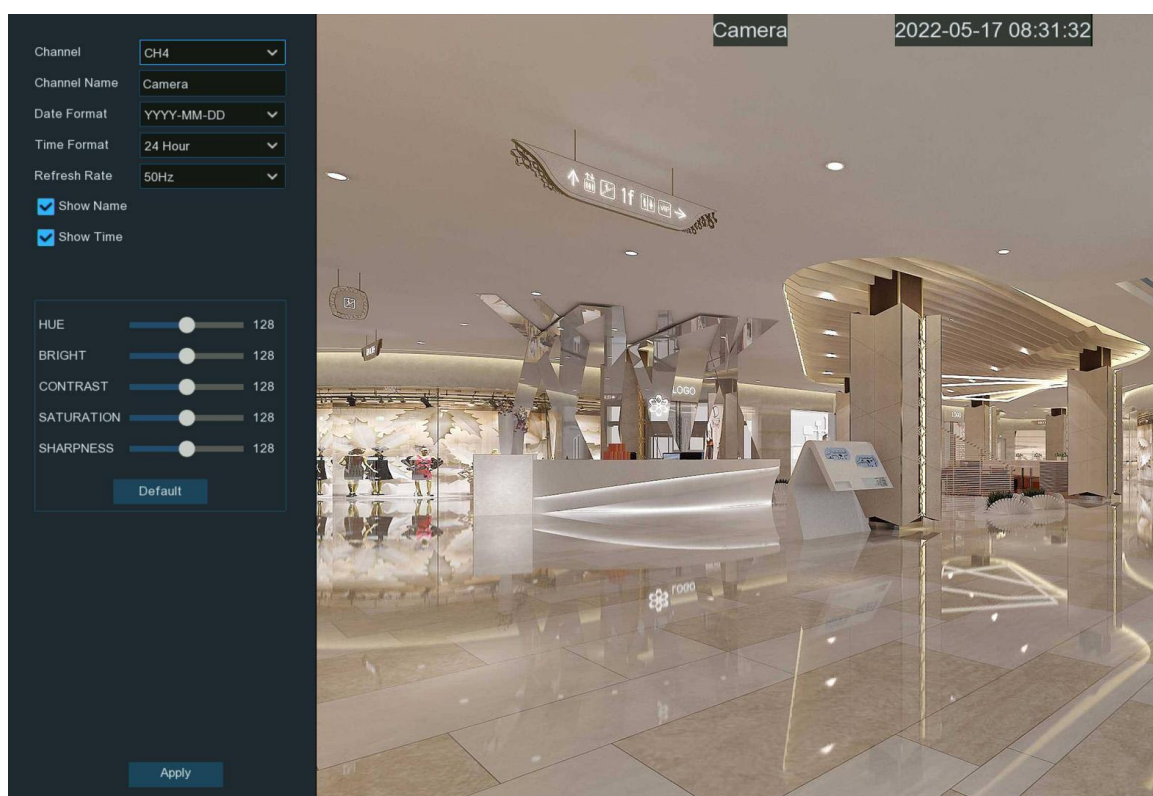

Channel: Select a channel to edit

Channel Name: Give a name to the camera

Date Format: To choose a date format

Time Format: To choose a time format

Refresh Rate: Choose the correct refresh rate

Show Name: To show or hide camera name

Show Time: To show or hide date and time

Alpha: Adjust the text transparency This allows you to adjust how visible the OSD (camera name, date & time) will be in Live View mode. By increasing the value (move the slider to the right), you will see a surrounding rectangle underneath the OSD. This is beneficial for cameras that are pointing towards bright areas that make it hard to see the OSD.

HUE: Adjust the hue value which changes the color mix of the image.

BRIGHT: Adjust the brightness which changes how light the image appears to be.


CONTRAST: Adjust the difference in luminance that makes an object distinguishable.

SATURATION: Adjust the values to alters how much color is displayed in the image.

SHARPNESS: Used to adjust the image sharpness. Click **Apply** to save settings. Click **Default** to load default settings. Click right button of your mouse to exit.


5.1.3. Image Control

This menu allows you to control image settings for supported IP cameras. If the camera is connected to the NVR with Onvif protocol, it might be not supported to configure.

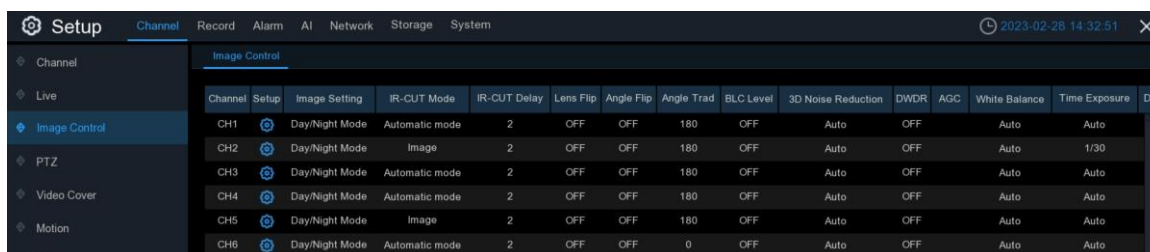

Channel	Setup	Image Setting	IR-CUT Mode	IR-CUT Delay	Lens Flip	Angle Flip	Angle Trad	BLC Level	3D Noise Reduction	DWDR	AGC	White Balance	Time Exposure	D
CH1		Day/Night Mode	Automatic mode	2	OFF	OFF	180	OFF	Auto	OFF		Auto	Auto	
CH2		Day/Night Mode	Image	2	OFF	OFF	180	OFF	Auto	OFF		Auto	1/30	
CH3		Day/Night Mode	Automatic mode	2	OFF	OFF	180	OFF	Auto	OFF		Auto	Auto	
CH4		Day/Night Mode	Automatic mode	2	OFF	OFF	180	OFF	Auto	OFF		Auto	Auto	
CH5		Day/Night Mode	Image	2	OFF	OFF	180	OFF	Auto	OFF		Auto	Auto	
CH6		Day/Night Mode	Automatic mode	2	OFF	OFF	0	OFF	Auto	OFF		Auto	Auto	

Setup: Click icon into the setup page.

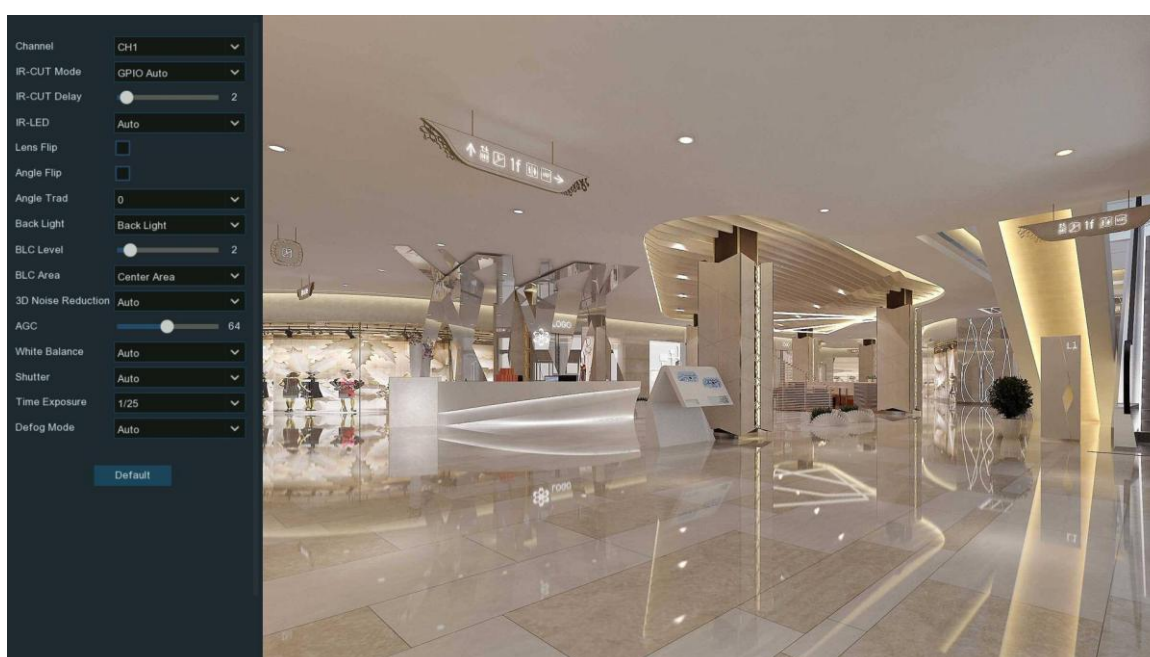

Channel: Choose a channel to configure.

IR-CUT Mode: Lets you choose how the camera handles color and how it manages the transition from daytime to night-time and vice versa:

- **GPIO AUTO** will instruct the camera to switch automatically from "Color Mode" to "Black White mode" and vice versa. It is accomplished through the light sensor.
- **Color Mode** will instruct the camera to operate in color mode only. In low light conditions, the color will be quite faint. Image clarity will also be reduced in low-light conditions.
- **Black White Mode** will instruct the camera to operate in black & white mode only.
- **Image Mode** will instruct the camera to switch automatically from "Color Mode" to "Black White mode" and vice versa. It is accomplished through the software.
- **Schedule** allows to set the images as black & white color in a certain duration.

IR-CUT Delay: Controls the delay of the IR cut filter when transitioning from daytime to night-time. The default setting will be suitable for most camera locations but can be adjusted if needed. Click and hold the slider left or right to change. The higher the number, the greater the delay.

IR-LED: To configure the IR LRD lighting method.

- **Smart IR:** If you want the LED lighting to be managed by the system, then select this.
- **Manual:** You're able to configure the brightness of the LED lights including low-beam lights and high-beam lights individually.
- **OFF:** Turn off the LED light always

Lens Flip & Angel Flip: Turn the image upside down and/or horizontally reverse the orientation of the image.

Corridor Mode: This allows you to make better use of the camera's vertical angle for an optimized view of long, narrow scenes. Enable this if your camera is viewing a narrow corridor.

Angle Rotation: Rotate the image 180°.

Back Light: When the surrounding illumination and the object have large differences in brightness, you can enable the exposure compensation to get a better image.

- **WDR/DWDR:** Images produced by wide dynamic range (WDR) function sensors can have proper exposure on both the darker and lighter parts of the image, giving more detail across a wider dynamic range between the shadows and highlights by brightening dark areas and darkening bright areas. If it is enabled, click and hold the slider left or right to change the **WDR Level**.
- **HLC:** High Light Compensation (HLC) allows your camera to compensate for brighter parts of your image, maintaining detail in brighter parts of the image that would otherwise be blown out. When you enable HLC, the camera will take bright spotlight-like areas into consideration and adjust the exposure accordingly. With HLC, your camera will try to properly expose your entire scene while reducing the brightness of the highlights. If it is enabled, click and hold the slider left or right to change the **HLC Level**.
- **Back Light:** Back Light Compensation (BLC) allows you to choose which areas of your scene should be properly exposed instead of letting the camera choose for you. By enabling BLC, the camera over-exposes the brighter parts of your image in order to properly expose the darker parts. If it is enabled, click and hold the slider left or right to change the **BLC Level**.
- **Disable:** Disable exposure compensation. **3D Noise Reduction:** Used to reduce the noise in the image so as to make the image clearer. There are three mode options.
- **Auto:** In this mode, the camera automatically selects the noise reduction effect in accordance with algorithms.
- **OFF:** The noise reduction function is disabled.

- **Manual:** In this mode, image noise is reduced in accordance with the noise reduction coefficient manually configured.

White Balance: Used to set white balance. There are two mode options.

- **Auto:** In this mode, the white light is adjusted by the default parameters.
- **Manual:** In this mode, you can manually set the synthetic gained white light of red, green, and blue.

Shutter: Used to set the shutter exposure time. There are two mode options.

- **Auto:** In this mode, a proper exposure time is automatically selected in accordance with the configured **Time Exposure** value.
- **Manual:** In this mode, the configured **Time Exposure** value is used.

Time Exposure: Used to set the exposure time of the camera. This parameter is used together with the **Shutter** parameter.

AGC: Used to set Automatic Gain Control (AGC). (It is supported by some models.)


Defog Mode: Used to set defog mode to optimize the display effect in foggy days. There are three mode options.

- **OFF:** The defog function is disabled.
- **Auto:** In this mode, the camera automatically judges the defog effect.
- **Manual:** In this mode, defogging is performed in accordance with the manually configured value.

Default: Click this button to restore the default image parameter setting.

5.1.3.1. Full Color Camera Settings

If there is a full color camera connected to the NVR, an **Image Setting** option is displayed under the **Image Control** setting page.

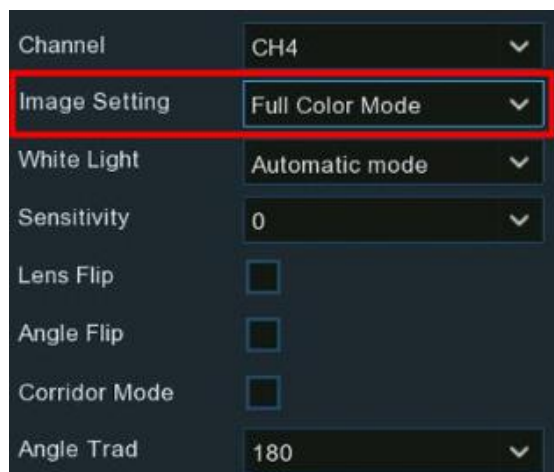


Full color camera includes not only IR LEDs, but also white light LEDs. You're able to determine the operating mode of the lights:

- **Day/Night Mode:** the camera will be working as a normal IR LED camera.
- **Full Color Mode:** the camera will be working as a full color camera. You're able to configure the brightness of white lights:

Auto: The brightness of the lights will be controlled by the system automatically according to the brightness of images.

Manual: The brightness of the lights will be controlled by manual. You're able to set a fixed value in the **Light**

- **Brightness bar.** The higher the number is, the brighter the lights are. Lights will be turned off if the value is set to 0.

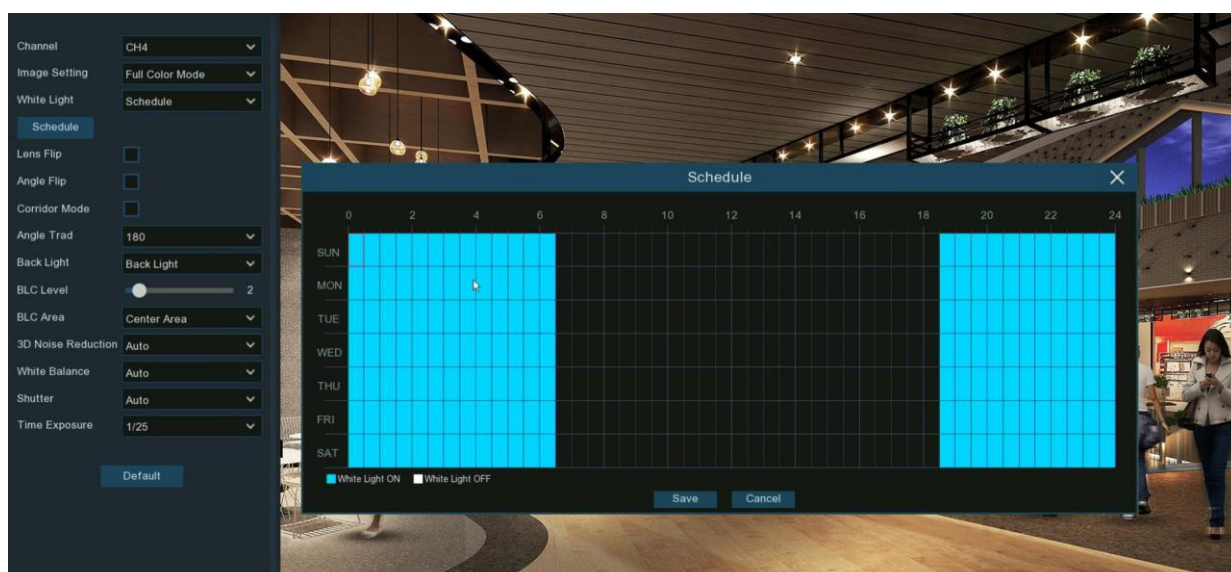


Schedule: You're able to set the white lights turned on or turned off in certain durations. Each square represents 30

- minutes. Using the mouse, click on a particular square to change or click and drag the mouse over the squares corresponding to your desired period. The white lights will be turned on if the time table is in blue color, oppositely the lights will be turned off if the time table is in black color.


OFF: Turn off the white lights.

- **Sensitivity:** The higher the number is, the more sensitive the system will be to light up the white lights and vice versa.
- **Schedule:** the lights will be working according to the schedule. Camera works in full color mode if the time table is in blue color, oppositely the camera works in day & night mode if the time table is in black color.

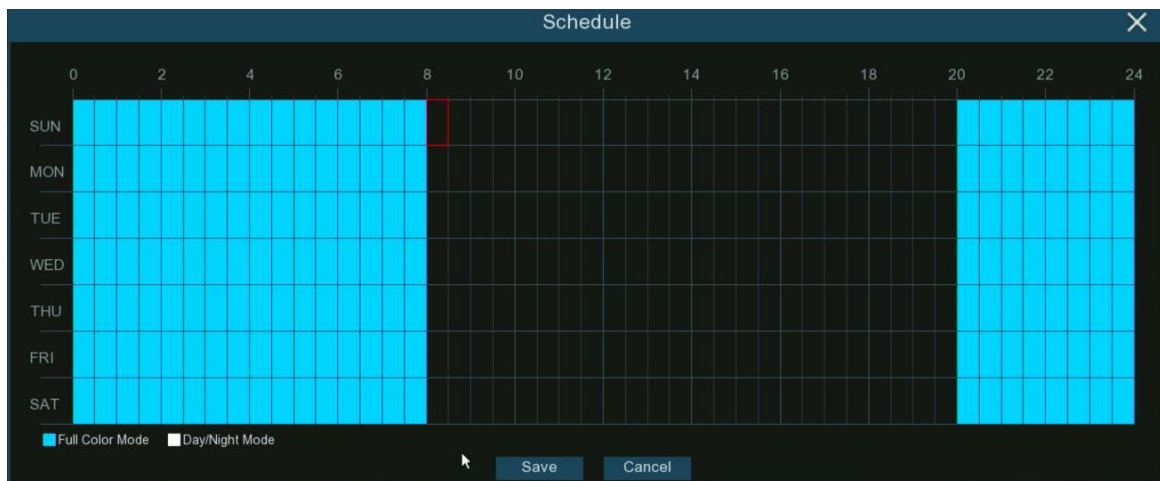

5.1.4. PTZ

This menu allows to configure the PTZ (Pan/Tilt/Zoom) settings for the speed dome cameras.

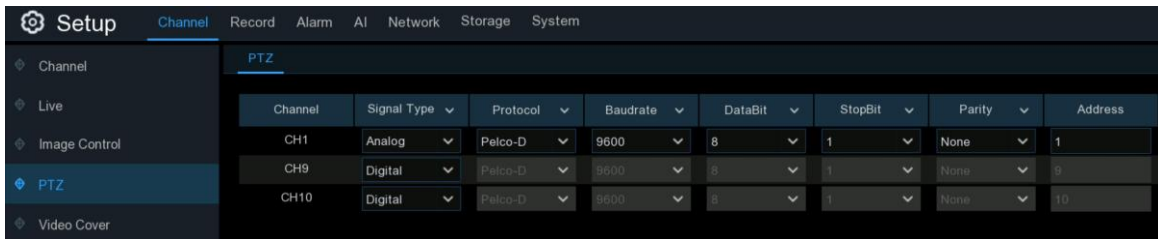

Channel: Channel name

Signal Type: If your PTZ camera is connected to the RS485 port, then choose "**Analog**", otherwise choose "**Digital**".

Following items are available only for Analog PTZ only:

Protocol: Choose the communication protocol between the PTZ capable camera and NVR.

Baudrate: The speed of the information sent from the NVR to the PTZ-capable camera. Make sure it matches the compatibility level of your PTZ-capable camera.

DataBit / StopBit: The information between the NVR and PTZ-capable camera is sent in individual packages. The **DataBit** indicates the number of bits sent, while the **StopBit** indicates the end of the package and the beginning of the next (information) package. The available parameters for **DataBit** are: **8, 7, 6, 5**. the available parameters for the **StopBit** are **1** or **2**.

Parity: For error check. See the documentation of your PTZ camera, to configure this setting.

Address: Set the command address of the PTZ system. Please be noted that each PTZ-capable camera needs a unique address to function properly.


5.1.4.1. MFZ & PTZ Control

In live viewing, click the left button of your mouse on a connected camera to pop up the Camera Quick Toolbar. Click the PTZ icon to enter PTZ control panel.



5.1.4.1.1. Controlling Your MFZ Camera

You're able to adjust the optical lens to zoom in or zoom out if a MFZ (Motorized Focus & Zoom) camera is connected. In live viewing, click the left button of your mouse on the MFZ camera to pop up the Camera Quick Toolbar. Click the PTZ button to enter MFZ control panel.

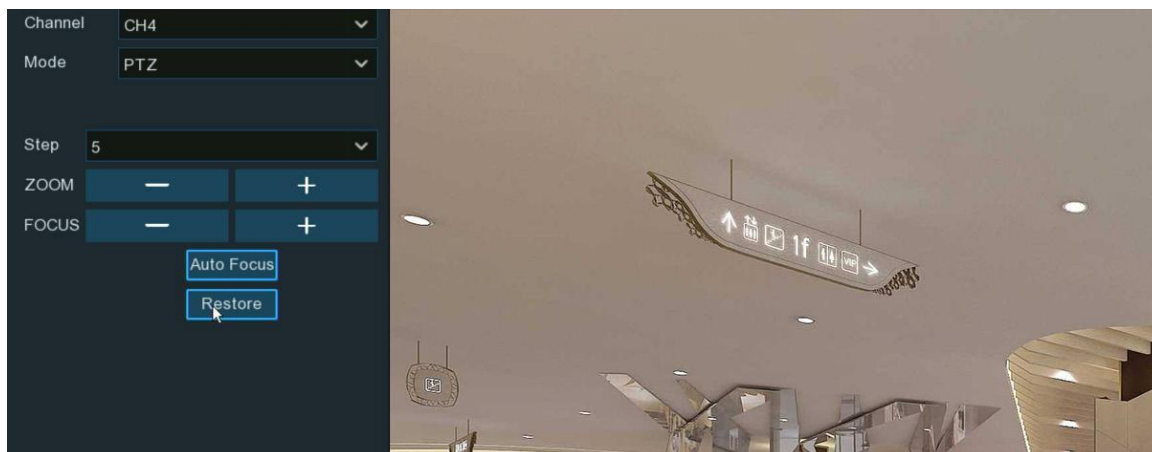

Step: To set the steps of each movement of the MFZ lens

Zoom: To control the zoom in and zoom out: : Single click on the button, the lens will perform one movement to zoom out the image and auto focus. Click and hold on

- the button to perform continuous movements till you release the mouse button.

: Single click on the button, the lens will perform one movement to zoom in the image and auto focus. Click and hold on the

- button to perform continuous movements till you release the mouse button.

Focus: To fine turn the focus by manual: : A single click on the button, the lens will perform one movement to focus out the image. Click and hold on the button to

- perform continuous movements till you release the mouse button. : A single click on the button, the lens will perform one movement to focus in the image. Click and hold on the button to
- perform continuous movements till you release the mouse button.

Auto Focus: Auto focus on the objects.

Restore: Restore the camera to default status.


5.1.4.1.2. Controlling Your PTZ Camera

In live viewing, click the left button of your mouse on the PTZ camera to pop up the Camera Quick Toolbar. Click the PTZ button to enter PTZ control panel.



Mode: To control the PTZ camera by PTZ, Preset, Line Scan, Watch Mode, Tour and Pattern Scan.

Directional Buttons: Click and hold the directional buttons to move the camera in the direction selected. Click the middle button to continually rotate the camera towards the left (click the any directional button to stop). If you want to change the rotation speed, you need to stop the rotation firstly, and then start again after changing the speed.

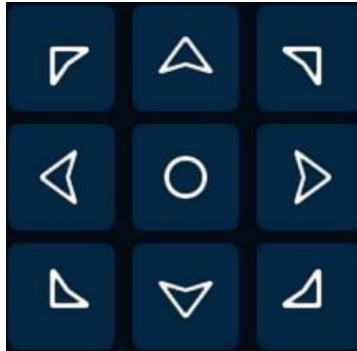

Speed: Adjust the speed control to alter how fast or slow the camera will pan or tilt. Move the slider to decrease or increase the speed.



Lens Control Buttons: To control the optical zoom, focus length and iris of the lens. Single click on the button, the lens will perform one movement to zoom out the image and auto focus. Click and hold on

-  button to perform continuous movements till you release the mouse button. Single click on the button, the lens will perform one movement to zoom in the image and auto focus. Click and hold on
-  the button to perform continuous movements till you release the mouse button.
-  Click and hold the button to decrease the focal length.
-  Click and hold the button to increase the focal length.
- Iris Click to reduce the iris value, image will get darker.
- Iris Click to increase the iris value, image will get brighter.

5.1.4.1.2.1 Controlling PTZ

In this section, you're able to control the Pan/Tilt/Zoom and more.




1. Select PTZ mode.
2. Click the directional buttons to move the camera
3. To adjust the speed to pan or tilt.
4. To control the optical zoom, focus and iris of the lens.
5. Using functional buttons:

3D PTZ control. After clicking on this button, you're able to control the pan/tilt/zoom directly on the live view screen.

- Click on any point in the image, and then the image will be centered on the clicked point.
- Drag: You can zoom in or zoom out the image by dragging your mouse on the image:

Click on the image and hold the mouse to drag a rectangle from point A to point B, the camera will zoom in to get the objects closer. Click on the image and hold the mouse to drag a rectangle from point B to point A, the camera will zoom out to get the objects farther.

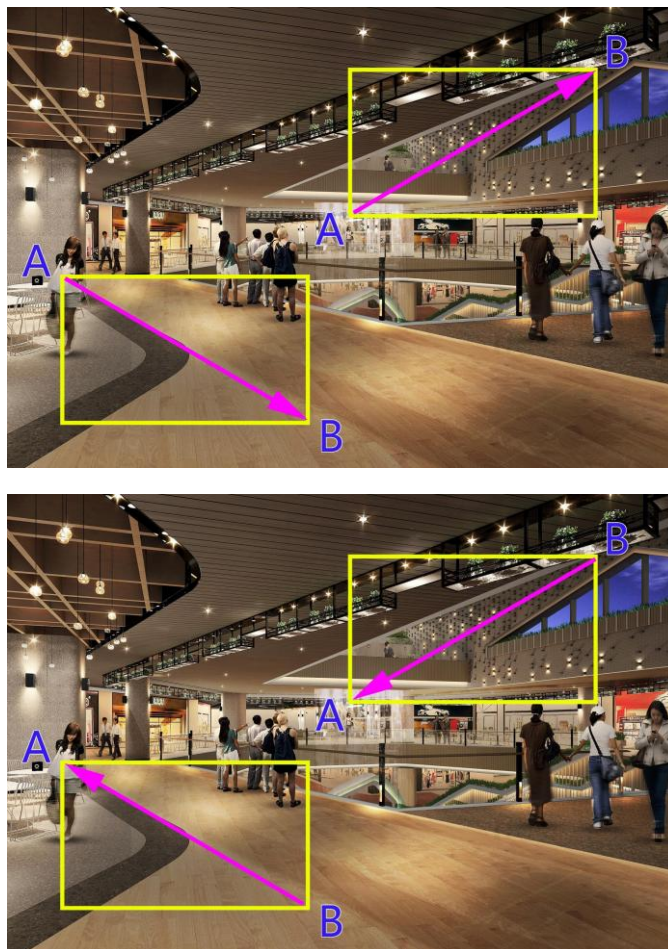


Focus Auto focus.

Zoom Load default values. All the parameters you set will be lost and restored to default values.

 Start or stop Watch Mode. See more on **5.1.4.1.2.3 Watch Mode**.

 If your PTZ camera supports auto tracking on the movement of human beings, you're able to control the tracking by manual if there are several detected targets to let the camera focused on a certain target. Before using this function, please make sure you have already activated the human detection function and enable the PTZ auto tracking function, view in **5.4.1.2. PD & VD (Human & Vehicle Detection)**.

Click the movement button, and then click and hold your mouse on the live view screen, drag a rectangle with yellow line to frame the targeted person. The camera will focus on the select person till he/she disappears from view.

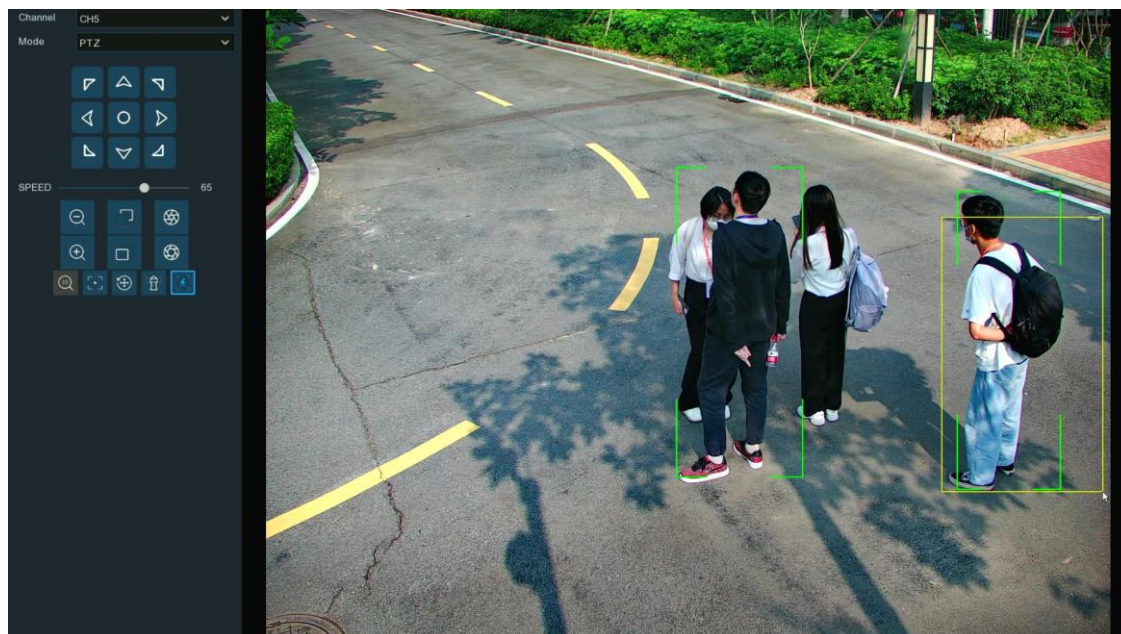

5.1.4.1.2.2 Preset Position

In this section, you're able to configure the preset positions. A preset position is a particular position within the image that you would like the camera to focus on. Up to 255 different preset positions can be created.



1. Select PRESET mode.

2. Adjust the speed control to alter how fast or slow the camera will pan or tilt.

3. Click and hold the directional buttons to move the camera in the direction selected.

4. Change the optical zoom, focus and iris of the lens if needed.

5. When the position is fixed, change the length of time (in seconds) the camera will stay at this position, before moving to the next position.

6. Click the add button to create the preset point.

7. Repeat step 1 to 6 to add more preset positions. The saved preset positions will be displayed with blue background.


8. Click the GO TO button, the camera will then move to that selected position.

9. Click Start Cruise, the camera will move to the preset positions in sequence. Click Stop Cruise to stop.

10. You can give a name to the preset position.


11. You can delete the preset position by clicking the Clear button.

12. Click the visual icon, you will see the thumbnail of preset position is displayed on the bottom of the live view image. You can go to, delete or add a preset position in the visual interface.

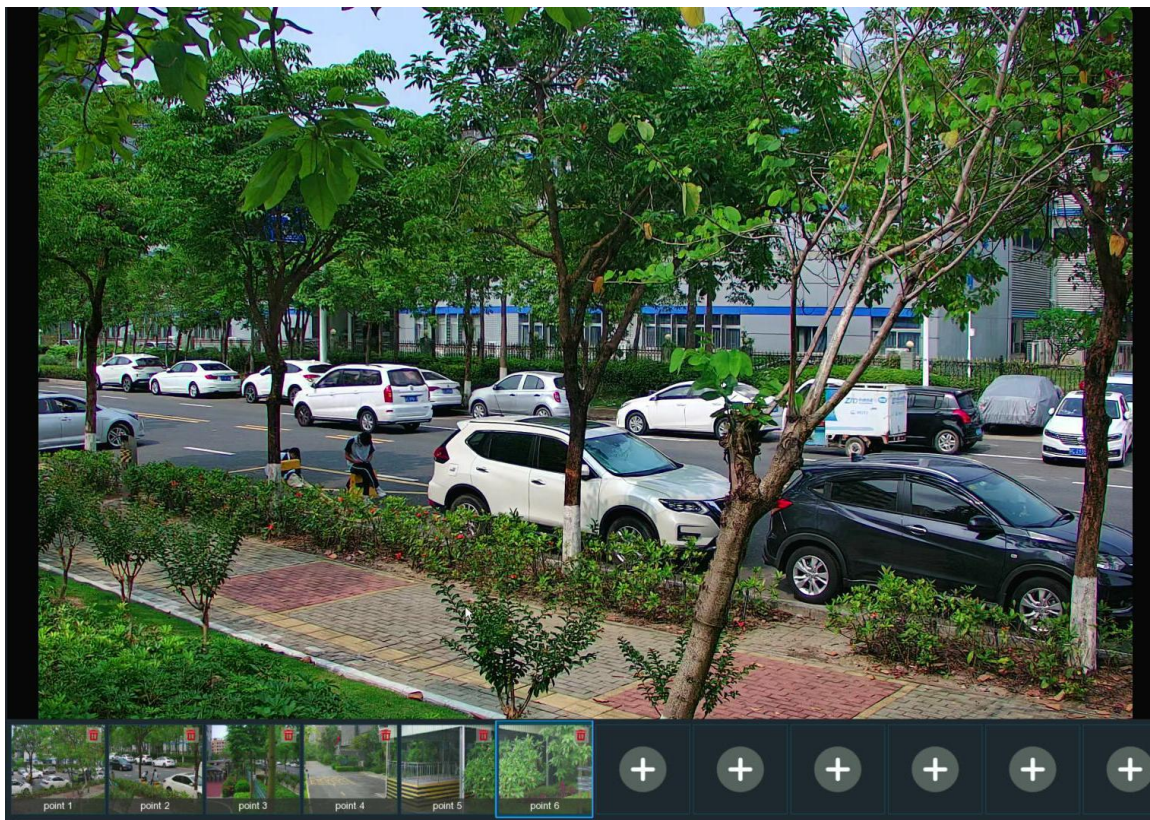

5.1.4.1.2.3 Watch Mode

Watch mode allows the camera to perform a preset action when there is no any operation to the camera, such as moving to a preset position, starting cruise, etc.

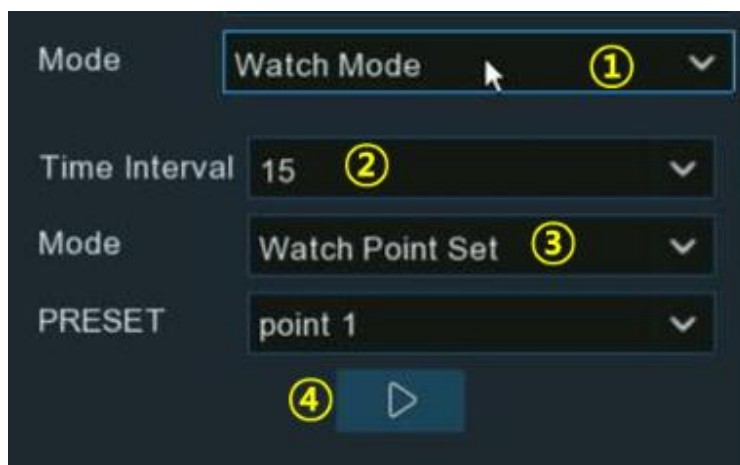

1. Select the **Watch Mode**.

2. Set the time interval. It means the length of time that must elapse before the watch mode is taken action. For example, the watch mode is activated and the interval is set to 15, the camera will perform the watching action if there is no operation to the camera in 15 seconds.

3. Choose the action when the watch mode is activated:

- **Default Cruise:** The camera will be continually rotated towards the left
- **Preset Position:** The camera will be moved to a selected preset position and stay.
- **Line Scan:** The camera will be implemented the Line Scan. See more on **5.1.4.1.2.4 Line Scan**.
- **Tour:** The camera will be implemented the Tour. See more on **5.1.4.1.2.5 Tour**.
- **Pattern Scan:** The camera will be implemented the Pattern Scan. See more on **5.1.4.1.2.6 Pattern Scan**. 4. Click button to start the Watch Mode. Press button to stop.

5.1.4.1.2.4 Line Scan

Line Scan allows the camera to automatically cruise between position A to position B horizontally.




1. Select **Line Scan** mode.
2. Adjust the speed control to alter how fast or slow the camera will pan or tilt.
3. Click and hold the directional buttons to move the camera in the direction selected.
4. Change the optical zoom, focus and iris of the lens if needed.
5. When the first position is fixed, click button to record this position A. Repeat step 3 & 4 to move the camera to another position. Click to record the position B.
6. Adjust the cruise speed.
7. Click button to start Line Scan. Press button to stop.

5.1.4.1.2.5 Tour


With the Tour function, you're able to configure maximum 4 tracks of auto cruise by choosing different preset positions.



1. Select **Tour** mode.
2. Select a track. Maximum 4 tracks available.
3. Set the time interval. It means the length of time that the camera will stay in each preset position.
4. Click add button + , a position box will be added and displayed in the position list. Click the box to choose a preset position. Maximum 32 positions can be added to a track.

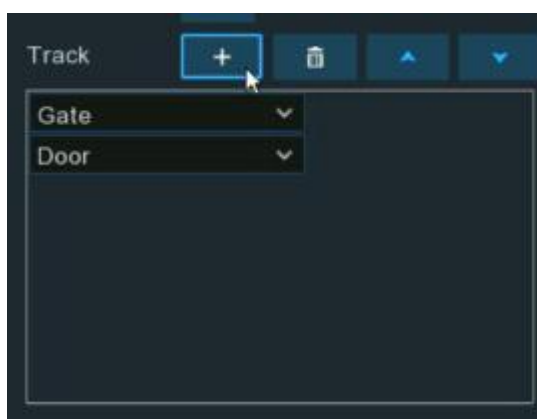

5. Click on the blank area on the right side of the position box, and then delete the preset position by clicking the delete button , or click / button to change its sequence.

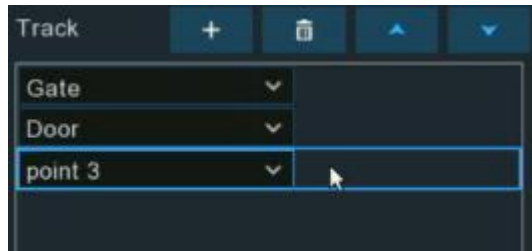

6. Click > button to save and start the tour. Press square button to stop.

5.1.4.1.2.6 Pattern Scan


This is a function that allows the camera to implement auto cruise by following a pre-record route.



1. Select **Pattern Scan** mode.
2. Select a track. Maximum 4 tracks available.
3. Adjust the speed control to alter how fast or slow the camera will pan or tilt.
4. Click and hold the directional buttons to move the camera in the direction selected.
5. Change the optical zoom, focus and iris of the lens if needed.
6. When the start position is fixed, click > button to start recording. Repeat step 4 & 5 to adjust the position. Press square button to finish the recording of route.
7. Click > button, the camera will be moved exactly same as the route which was recorded in step 6, including zoom, focus, direction. Press square button to stop.

5.1.5. Privacy Zone

This function can obscure all or part of your image for privacy (you can create up to 4 privacy masks per camera). Areas obscured by a mask won't be shown live or recorded.

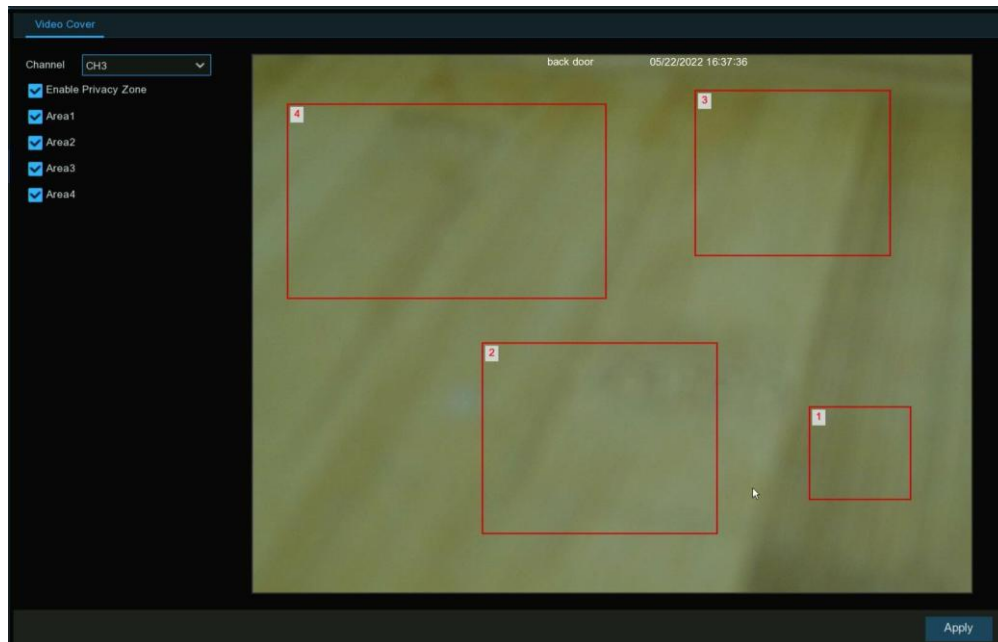

Channel: Select a camera that you would like to edit.


Enable Privacy Zone: Tick to enable this function.

Area 1 to 4: Click the checkbox on the number of privacy masks that you want to enable. Up to 4 privacy masks can be enabled per camera. Depending on the number of privacy masks enabled, one or more masks will appear in the Live View windows. Depending on the number of masks that you want to enable, each mask will be numbered. To reposition the mask, click and hold inside the mask then move the mask to the desired location. To resize the mask, click and hold the bottom right corner of the mask then resize to the desired size. You can reposition and resize each mask to overlap each other. When finished, click "**Apply**" to save. Areas obscured by a mask won't be shown live or recorded. To remove a mask, uncheck the checkbox next to the relevant area, then click "**Apply**" to save.



5.1.6. Motion Detection

This menu allows you to configure motion parameters. When motion has been detected by one or more cameras, your NVR will alert you to a potential threat at your home. It does this by sending you an email alert with an attached image from the camera to use as a reference (if this option is enabled) and/or sending push notifications via the mobile app.

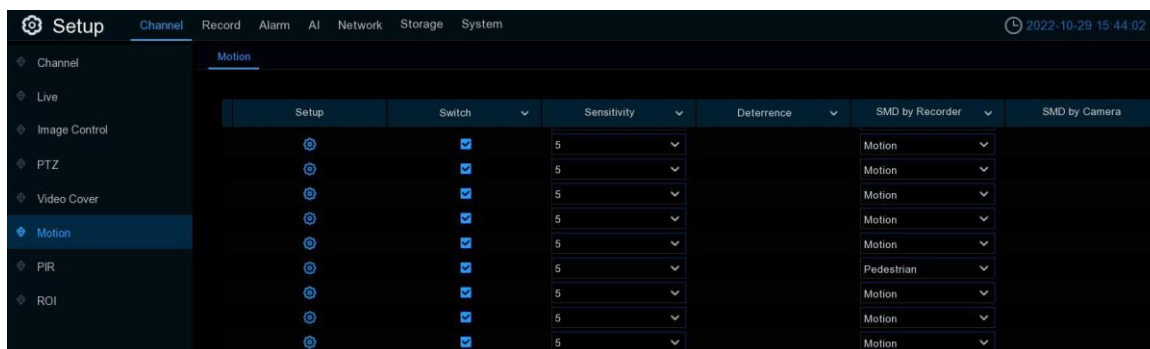

Switch: Enable or disable motion detection.

Sensitivity: This option allows you to change the sensitivity level. The higher the number, the more sensitive your NVR will be when detecting motion.


SMD by Recorder: Used for the cameras that do not support intelligent motion detection.

SMD by Camera: Used for the IP cameras that support intelligent motion detection. There are four detection types available: Motion, Human, Vehicle, and Vehicle&Human.


- **Motion:** The camera will detect all motion events, including movements of human beings, vehicles, animals, trees, etc. If your camera or NVR supports smart motion detection (SMD), you'll be able to choose below advanced motion detection targets:
- **Human:** The camera only alert when the movements of human beings are detected.
- **Vehicle:** The camera only alert when the movements of vehicles are detected.
- **Vehicle & Human:** The camera only alert when the movements of human beings and/or vehicles are detected.

Motion Detection Area Setup: Click settings icon into the setup page.

1. The whole screen is marked for motion detection (red blocks) as default. Click "**Clear All**" to delete all the default detection area.

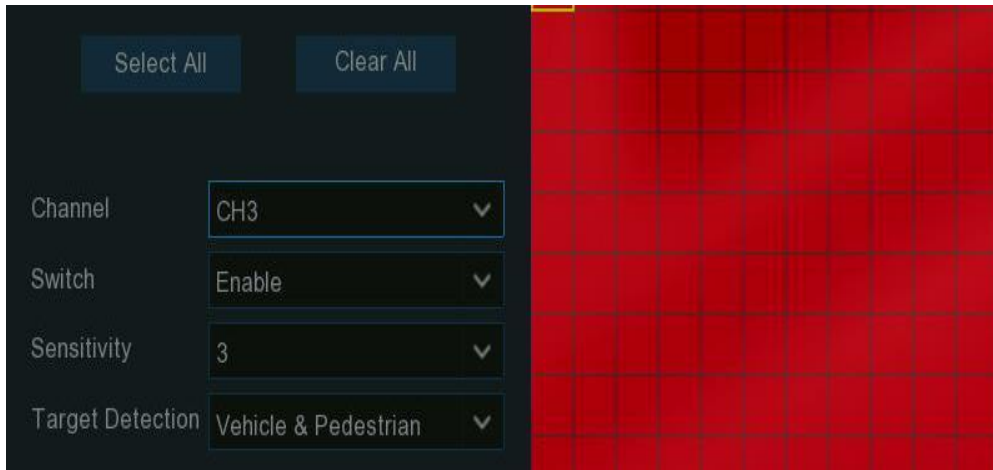


2. To create a new detection area, press and hold the left mouse button to select the cell or square that you want to start at, then click and drag to select the area that you want to create. Release the mouse to finish.
3. Multiple areas can be created. Each cell or square can be enabled to detect motion. The same action also applies when deleting an area.
4. Movement outside of the motion detection areas won't be detected therefore will not trigger recordings or event notifications.
5. Adjust the sensitivity if required, then right-click the mouse to exit.
6. Click "**Apply**" to save changes made.

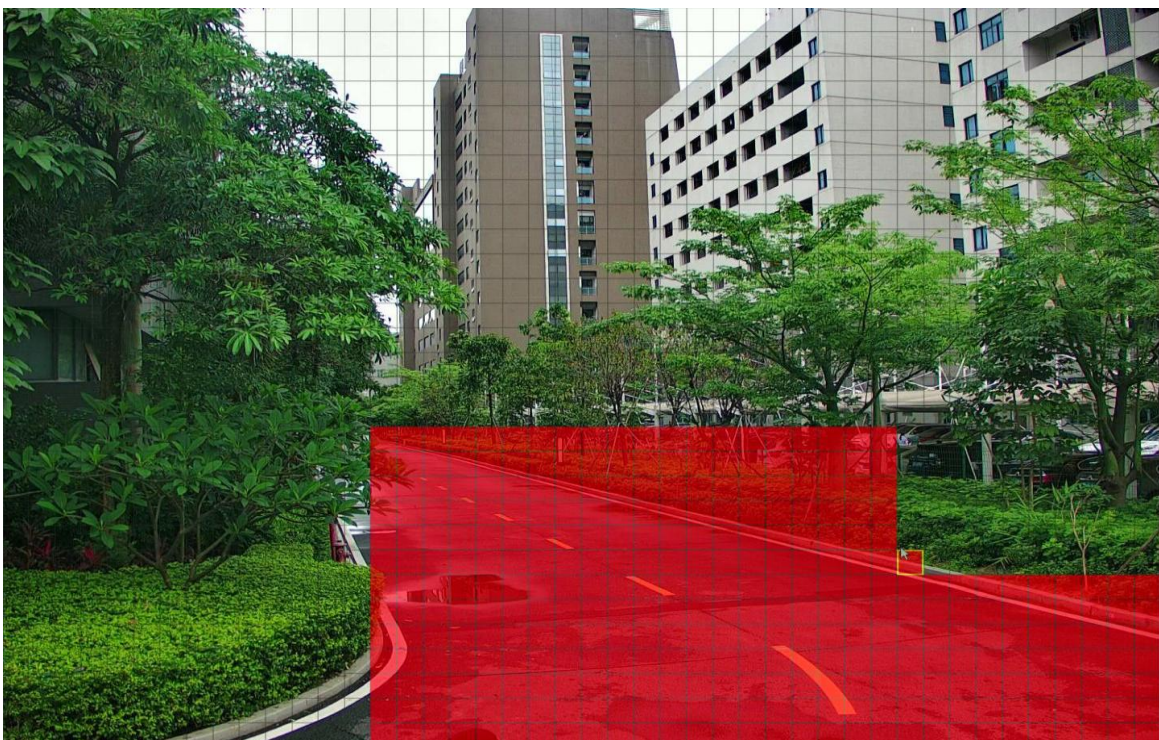


5.1.6.1. Motion Alarm Settings

Click the **Alarm** button to change options for alarm notifications and more.

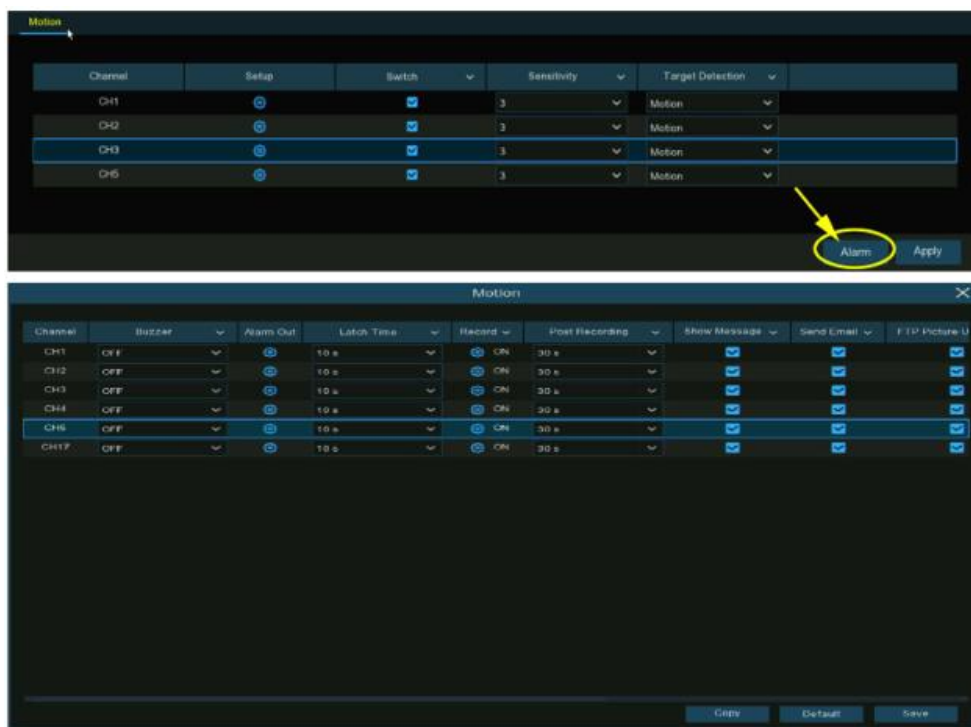

Buzzer: When motion is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

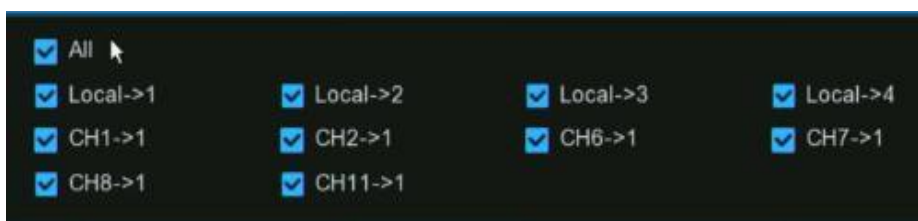

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click settings icon, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

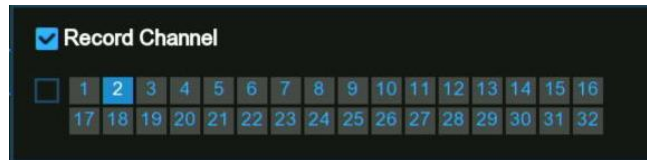

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.


Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Save: Click "Save" to save settings.

5.1.7. PIR

This menu allows you to configure PIR (passive infrared motion detector) parameters. When PIR alarm has been detected by one or more cameras, your NVR will alert to you a potential threat. It does this by sending you an email alert with an attached image from the camera to use as a reference (if this option is enabled) and/or sending push notifications via the mobile app.


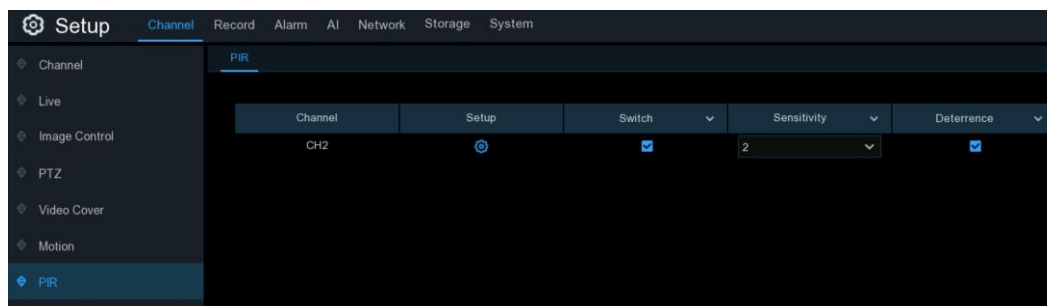


Switch: Enable or disable PIR detection.

Sensitivity: This option allows you to change the sensitivity level. The higher the number, the more sensitive your NVR will be when detecting PIR. **Deterrence:** Tick to light up the built-in white lights of your PIR camera.


PIR Detection Area Setup: Click settings icon into the setup page. The whole screen is marked for PIR detection (red blocks) as default. Click "**Clear All**" to delete all the default detection area. To create a new detection area, press and hold the left mouse button to select the cell or square that you want to start at, then click and drag to select the area that you want to create. Release the mouse to finish.

1. Multiple areas can be created. Each cell or square can be enabled to detect PIR. The same action also applies when deleting an area.
2. Movement outside of the detection areas won't be detected therefore will not trigger recordings or event notifications.
3. Adjust the sensitivity if required, then right-click the mouse to exit.
4. Click "**Apply**" to save changes made.

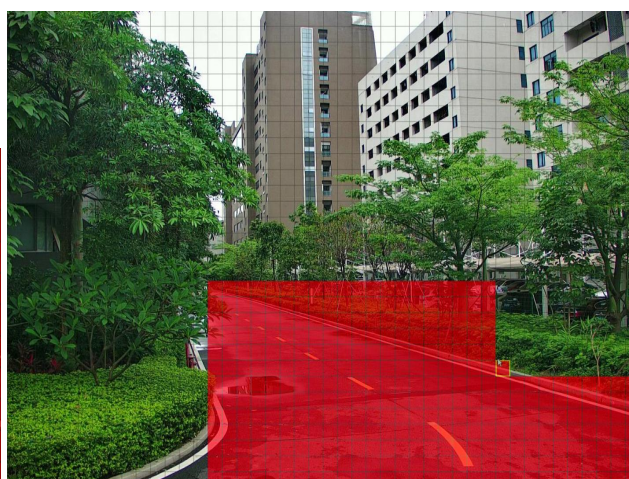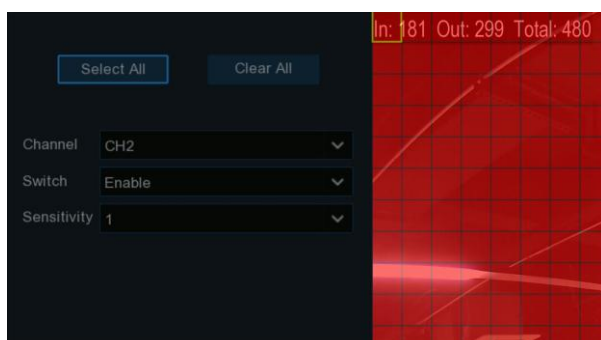


5.1.7.1. PIR Alarm Settings

Click the **Alarm** button to change options for alarm notifications, alerts and more.

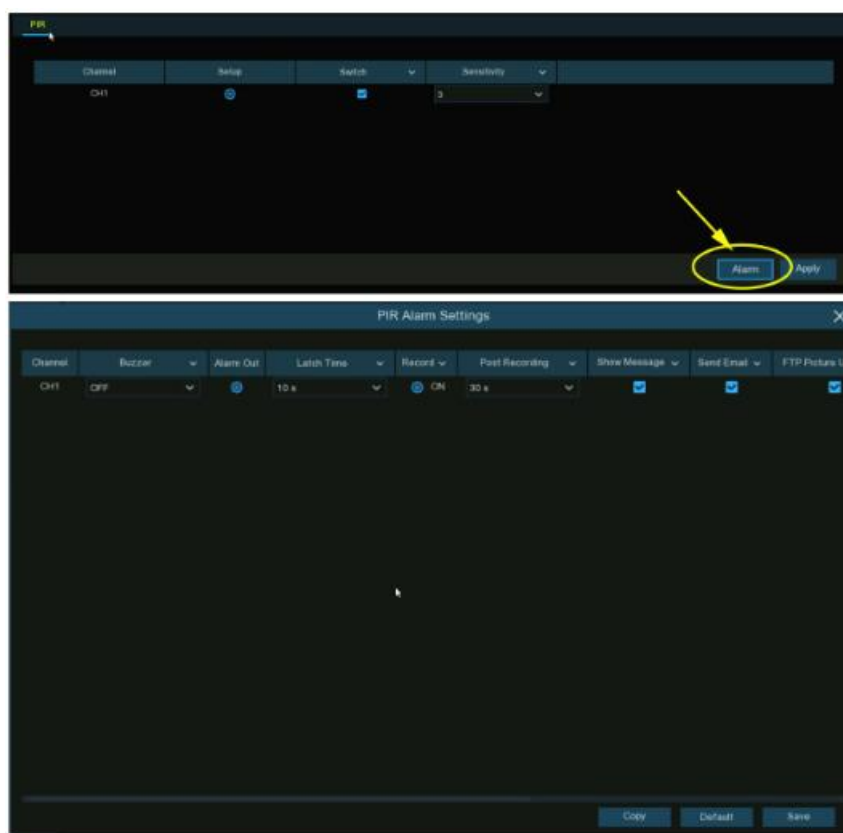

Buzzer: When PIR alarm is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.

Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

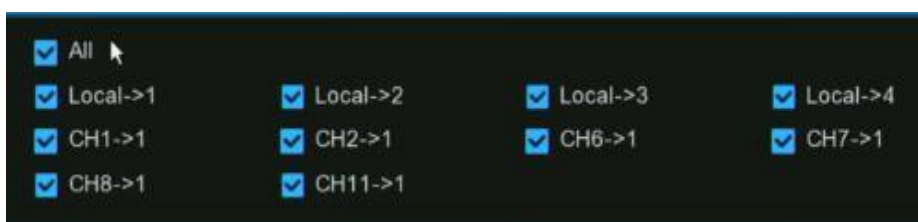


Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when PIR is detected. Click the drop-down arrow to choose all channels to be recorded or not. icon, click the "**Record Channel**" checkbox to enable recording. Click the checkbox in front of the

channel number to Click select all channels or click on the individual camera number that you want to trigger for recording.

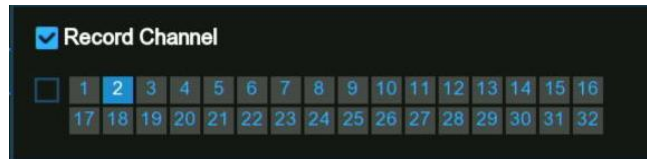

Post Recording: This option instructs your NVR to record for a set time after an event has occurred.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.

Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Save: Click "Save" to save settings.

5.1.8. ROI

Regions of Interest (ROIs) are selected regions for special attention in the video area. This function aims to improve the image encoding quality of the selected regions and reduce the encoding quality outside the selected regions, so as to ensure the image sharpness of the regions for special attention under the condition of constant bitrate. (Note: This function needs to be supported by the camera. It cannot be used with the H.264+ and H.265+ encoding types at the same time.)

Setup							
Channel							
ROI							
Channel	Setup	StreamType	Region ID	Enable Region	ROI Level	Non-ROI Fps	
CH5		Mainstream	1	☐	Lowest	24	
CH6		Mainstream	1	☐	Lowest	29	
CH7		Mainstream	1	☐	Lowest	29	
CH8		Mainstream	1	☐	Lowest	24	
CH9		Mainstream	1	☐	Lowest	29	
CH10		Mainstream	1	☐	Lowest	29	
CH22		Mainstream	1	☐	Highest	14	
CH23		Mainstream	1	☐	Highest	19	

Stream Type: Select the stream type to set.

Region ID: Select the region ID to be set. You can set at most eight region IDs.

Enable Region: Used to set whether to enable the selected regions: The **Region ID** and **Enable Region** parameters of the selected regions are mutually independent and need to be configured separately.

ROI Level: Used to set the image quality of the selected regions. The higher the quality is, the clearer and the smoother the image is.

Non-ROI Fps: Used to set the frame rate outside the selected regions.

Setup: Click to open the setting page.



Area: Used to set whether to enable ROI selection. The configuration takes effect after you click **Apply**.

5.2. Record


The recording configuration options are available in the Record and Capture menus accessible from the Main Menu. From here, you can access and change the recording frame rate & resolution and recording schedule for each camera connected. You can also enable and set a schedule for your NVR to take a snapshot each time when an event occurs.

5.2.1. Encoding Settings

This menu allows you to configure the recording video or network transmission picture quality. Generally, Mainstream defines the recording video quality which will be saved in the HDD; Substream defines the video quality which is being viewed via remote access, for example web client & CMS/VMS; Mobile Stream defines the video quality which is being viewed via remote access via mobile devices.

5.2.1.1. Video Encoding

You're able to configure the encode parameters of mainstream, substream and mobile stream accordingly.

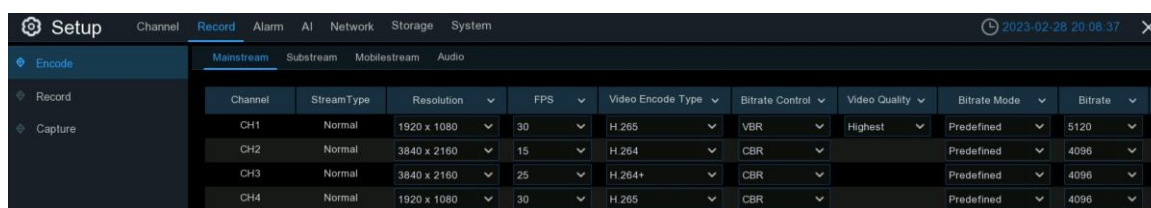

Channel	StreamType	Resolution	FPS	Video Encode Type	Bitrate Control	Video Quality	Bitrate Mode	Bitrate
CH1	Normal	1920 x 1080	30	H.265	VBR	Highest	Predefined	5120
CH2	Normal	3840 x 2160	15	H.264	CBR		Predefined	4096
CH3	Normal	3840 x 2160	25	H.264+	CBR		Predefined	4096
CH4	Normal	1920 x 1080	30	H.265	CBR		Predefined	4096

Resolution: This parameter defines how large the recorded images will be. The higher the number, the greater the detail available. By default, the recording resolution of the camera is auto-selected by your NVR.

FPS: This parameter defines the number of frames per second the NVR will record. By default, the recording frame rate of the camera is auto-selected by your NVR.

Video Encode Type: It will list the codecs which are supported by the connected camera. The H.265 codec will compress the information more efficiently and provide the best video quality for a given bandwidth between each camera and your NVR, and H.265+ has more compression rate than H.265. The other codec is H.264 which will impact the reliability of the connection between each camera and your NVR due to the higher bandwidth required, and H.264+ has more compression rate than H.264.

Bitrate Control: Select the bitrate level. For a simple scene, such as a gray wall is suitable constant bitrate (**CBR**). For more complex scene, such as a busy street is suitable variable bitrate (**VBR**).

Video Quality: Available for VBR only, you can select the recording quality that will define the variable bitrate used, from lowest to highest.

Bitrate Mode: If you want to set the bitrate by yourself, then choose **User-defined** mode. If you want to select the predefined bitrate, choose **Predefined** mode.

Bitrate: This parameter corresponds to the speed of data transfer that the NVR will use to record video. Recordings that are encoded at higher bitrates, will be of better quality. For cameras that monitor medium to high traffic areas, increase the bitrate to add more detail to the camera's image. Just be aware this will increase the bandwidth required. Increase the bitrate in small doses until you are satisfied with the image quality.

Audio: If your camera has built-in microphone or external audio input device, you're able to record the audio streaming together with the video streaming. Click the checkbox to disable or enable. Make sure you have already enabled the Audio streaming in **5.2.1.2. Audio Encoding** if you want to record the audio streaming.

Mainstream Substream Mobilestream Audio									
	FPS	Video Encode Type	Bitrate Control	Video Quality	Bitrate Mode	Bitrate	Audio	I Frame Interval	ETR
	30	H.265	VBR	Highest	Predefined	4096	☒	60	
	25	H.264	VBR	Highest	Predefined	4096	☐	60	☐
	15	H.265	VBR	Highest	Predefined	4096		30	
	15	H.264	VBR	Highest	User-defined	4096	☐	30	
	15	H.264	VBR	Lowest	User-defined	4096	☐		
	30	H.265	VBR	Highest	Predefined	4096	☒	60	
	30	H.265	VBR	Highest	Predefined	6144	☒	60	☐
	30	H.265	VBR	Highest	Predefined	4096	☒	60	☐
	1	H.264	CBR		Predefined				
	30	H.265	VBR	Highest	Predefined	8192	☒	60	

(Slide to the right to view more options)

I Frame Interval: This configures the number of partial frames that occur between full frames (I-Frames) in the video stream. For example, in a scene where a door opens and a person walks through, only the movements of the door and the person are stored. The stationary background that occurs in the previous partial frames are not encoded. As the I-Frame increases, the number of partial frames also increases. Higher values are only recommended on networks with high reliability, otherwise leave the default selection. **ETR:** If your camera supports ETR function, it allows you to set independent video streaming for normal and alarm triggered recording.

CH7	Normal	3840 x 2160	15	H.265	CBR	Predefined	2048	☒
	Alarm	3840 x 2160	30	H.265	CBR	Predefined	8192	☒

For example, you can decrease the frame rate and bitrate to reduce the recording file size in normal recording, and increase the frame rate and bitrate to have clearer and more fluent camera images when an alarm event occurs. **ERT** available for mainstream only.

5.2.1.2. Audio Encoding

If your camera has built-in microphone or external audio input device, you're able to activate the audio stream, define the input/output volume, and select the audio encode type.

Mainstream	Substream	Mobilestream	Audio			
Channel	Enable	Output Volume	Input Volume	Type		
CH1	☒	5	5	G711A		
CH2	☒	5	5	G711U		
CH4	☒	5	5	G711U		
CH6	☒	5	5	G711A		
CH7	☒	5	5	G711A		
CH8	☒	5	5	G711A		
CH11	☒	5	5	G711A		

Enable: To turn on or turn off the audio streaming. **Output Volume:** To choose the audio output volume **Input Volume:** To choose the audio input volume

Type: To choose the audio encoding codec.

5.2.2. Record

This menu allows you to configure the recording parameters for each channel.

Setup

Channel
Record
Alarm
AI
Network
Storage
System

2023-02-28 20:11:35

×

Encode

Record

Capture

Record

Record Schedule

Channel	Record Switch	Stream Mode	PreRecord	ANR	
CH1	☒	DualStream	☒	☒	
CH2	☒	DualStream	☒		
CH3	☒	DualStream	☒	☒	
CH4	☒	DualStream	☒	☒	
CH5	☒	DualStream	☒	☒	
CH6	☒	DualStream	☒	☐	
CH7	☒	DualStream	☒	☒	
CH8	☒	DualStream	☒	☒	
CH9	☒	DualStream	☒	☒	
CH10	☒	DualStream	☒	☒	
CH11	☒	DualStream	☒		
CH12	☒	DualStream	☒		
CH13	☒	DualStream	☒		
CH14	☒	DualStream	☒		
CH15	☒	DualStream	☒		
CH16	☒	DualStream	☒		
CH17	☒	DualStream	☒	☒	
CH18	☒	DualStream	☒		
CH19	☒	DualStream	☒		
CH20	☒	DualStream	☒		
CH21	☒	DualStream	☒		

Copy

Default

Apply

5.2.2.1. Recording Configuration

Record				
Record Schedule				
Channel	Record Switch	Stream Mode	PreRecord	ANR
CH1	☒	DualStream	☒	
CH2	☒	DualStream	☒	
CH3	☒	DualStream	☒	
CH4	☒	DualStream	☒	
CH5	☒	DualStream	☒	
CH6	☒	DualStream	☒	
CH7	☒	DualStream	☒	☒
CH8	☒	DualStream	☒	☒
CH9	☒	DualStream	☒	


Record Switch: Check to enable the recording in this channel.

Stream Mode: By default, your NVR will record both Mainstream and Substream video (known as **Dual-stream**). **Mainstream** (high quality) video is used for playback when using your NVR directly, and Substream (reduced quality) is used for remote playback on your mobile device. If remote playback is not required, you can select Mainstream recording only to save your storage space.

Prerecord: Allows your NVR to record for several seconds before an event occurs. It's recommended to leave this enabled. **ANR** : Generally, videos are stored in the NVR when network connection is normal between the NVR and cameras. With ANR (Automatic Network Replenishment) function, the camera would start continuous recording and store videos in SD card instead when the connection is lost. Once the network is restored, the video recordings will be sent back to NVR's storage. It is recommended to enable ANR if your camera supports this function.

5.2.2.2. Recording Schedule

This menu allows you to specify when the NVR records video and defines the recording mode for each channel. The recording schedule lets you set up a schedule like, daily and hourly by normal (continuous) recording, motion recording, I/O alarm recording & PIR recording (if your camera supports). By default, the NVR is set to constantly record in 24-hour 7 days. The schedule can be changed to suit your needs and each camera can have a different schedule if needed. The schedule is color coded to represent the event type.

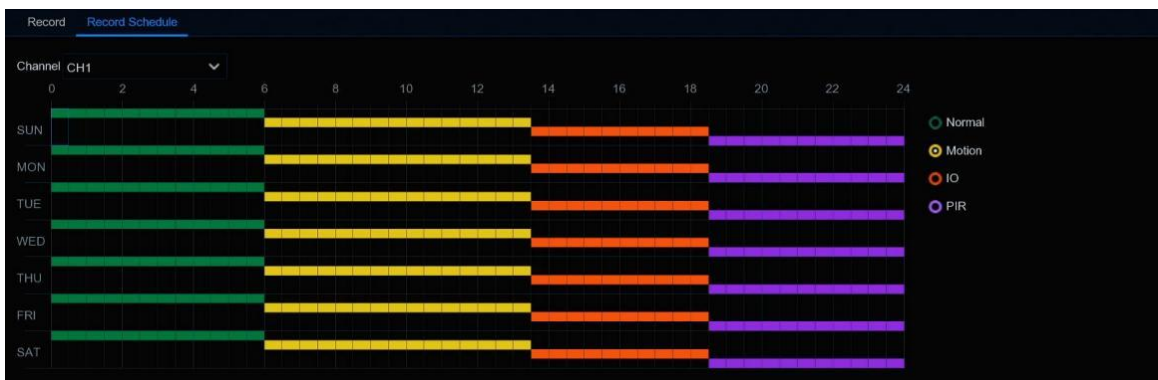


1. Choose a **Channel** you want to set.
2. Click on the mode radio button to choose one of the recording modes:
 - **Normal:** Your NVR will constantly record for a set period. Time slot will be marked green color for normal recording.
 - **Motion:** Your NVR will only record when motion is detected. Time slot will be marked yellow color for motion detection recording.
 - **IO:** Your NVR will only record when external sensor is triggered. Time slot will be marked red color for sensor triggered recording.
 - **PIR:** Your NVR will only record when PIR detection occurs. Time slot will be marked purple color for PIR detection recording.
3. Drag the cursor to mark the slots on the time slots.
4. The set recording schedule is valid only for one channel. If you want to use the same recording schedule for other channels, use **Copy** function.
5. If a time slot marked black means that there will be no recording at the time period.
6. Click **Apply** to save your settings.

5.2.3. Capture Images

You can enable and set a schedule for your NVR to take a snapshot each time an event occurs. It helps to find alarm events quickly and can also be used for timelapse photography.

Note: The maximum resolution of captured image is 1920x1080.

5.2.3.1. Capture Configuration

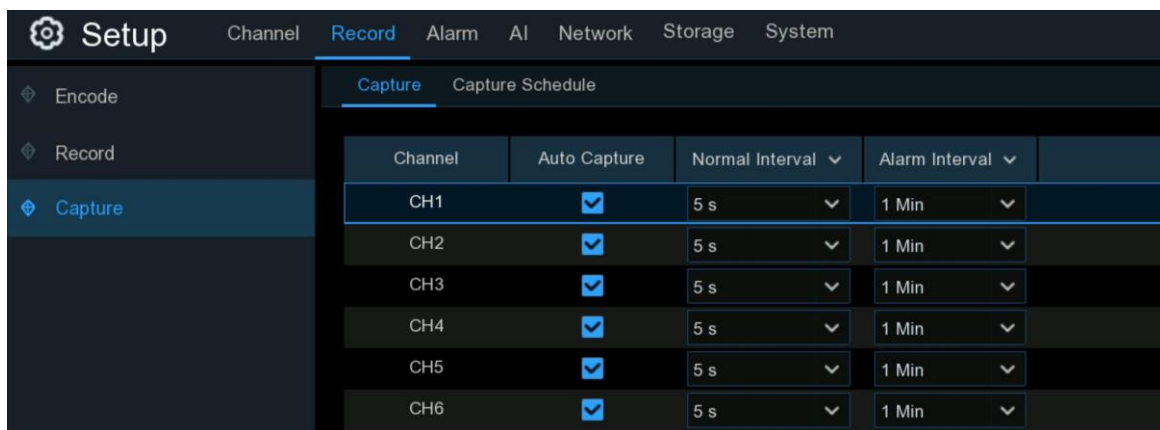

Channel	Auto Capture	Normal Interval	Alarm Interval
CH1	☒	5 s	1 Min
CH2	☒	5 s	1 Min
CH3	☒	5 s	1 Min
CH4	☒	5 s	1 Min
CH5	☒	5 s	1 Min
CH6	☒	5 s	1 Min


Auto Capture: When enabled, your NVR will take a snapshot each time an event occurs.

Normal Interval: The length of time that must elapse before a snapshot is taken. For example, when setting a "**Normal**" capture schedule, a snapshot is taken every 5 seconds using the default selection. Adjust accordingly.

Alarm Interval: When setting alarm (Motion, IO or PIR) capture schedule, a snapshot is taken each time when alarm is detected, according to the interval selected. Adjust accordingly.

5.2.3.2. Capture Schedule

You must create a capture schedule so your NVR can take snapshots when an event has occurred or if you want to take snapshots using a time interval (every 5 seconds, for example).

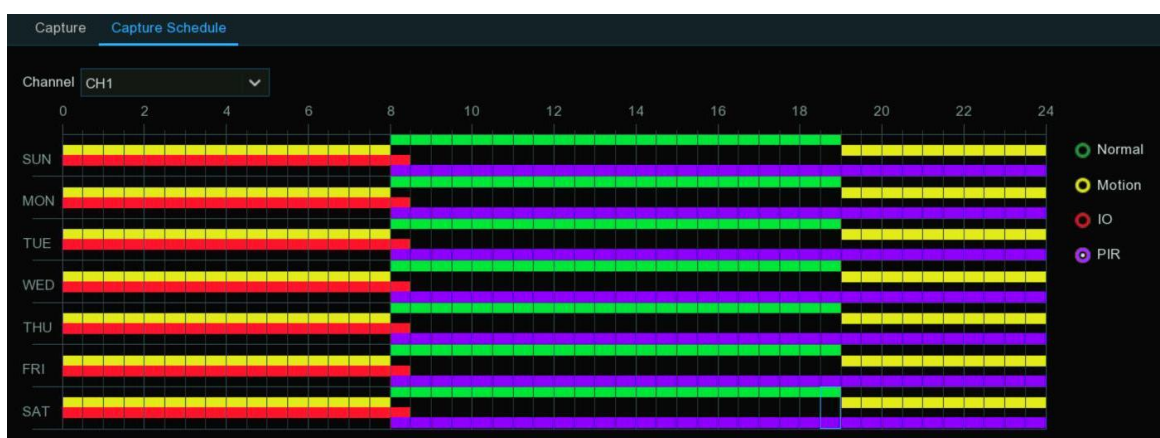

1. Choose a **Channel** you want to set.
2. Click on the mode radio button to choose one of the capture modes:

- **Normal:** A snapshot is taken according to the normal interval setting selected (every 5 seconds, for example). Time slot will be marked green color for normal capture.
- **Motion:** A snapshot is taken during a motion alarm. Time slot will be marked yellow color for motion detection capture.
- **IO:** Your NVR will only record when external sensor is triggered. Time slot will be marked red color for normal recording.
- **PIR:** Your NVR will only record when PIR detection occurs. Time slot will be marked purple color for normal recording.

3. Drag the cursor to mark the slots on the time table.

4. The set capture schedule is valid only for one channel. If you want to use the same schedule for other channels, use **Copy** function.


5. If a time slot marked black means that there will be no capture at the time period.

6. Click **Apply** to save your settings.

5.3. Alarm Settings


In this section, you can configure the alarm actions when event occurs.

5.3.1. Motion Alarm

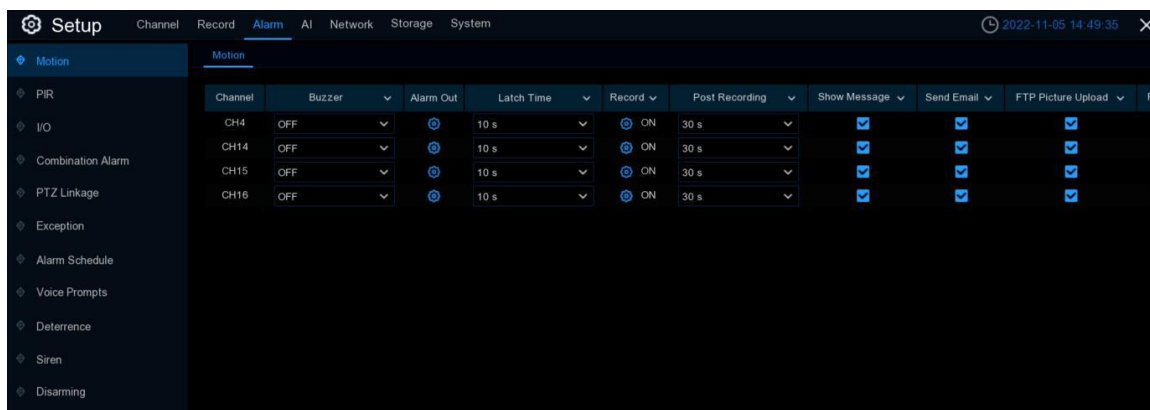

Buzzer: When motion is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

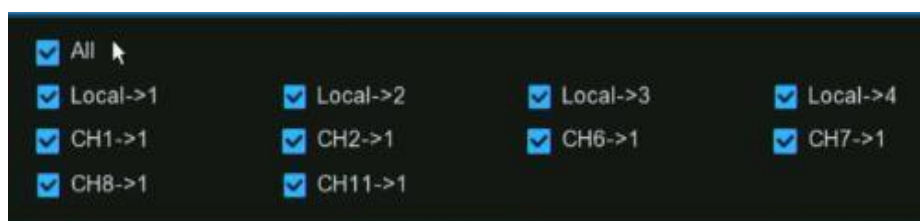

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

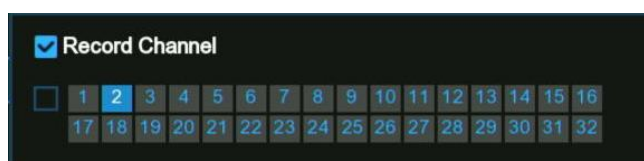

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.




Motion: To configure the motion detection. See more on **5.1.6. Motion Detection**.

Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.


Apply: Click "Apply" to save settings.

5.3.2. PIR Alarm

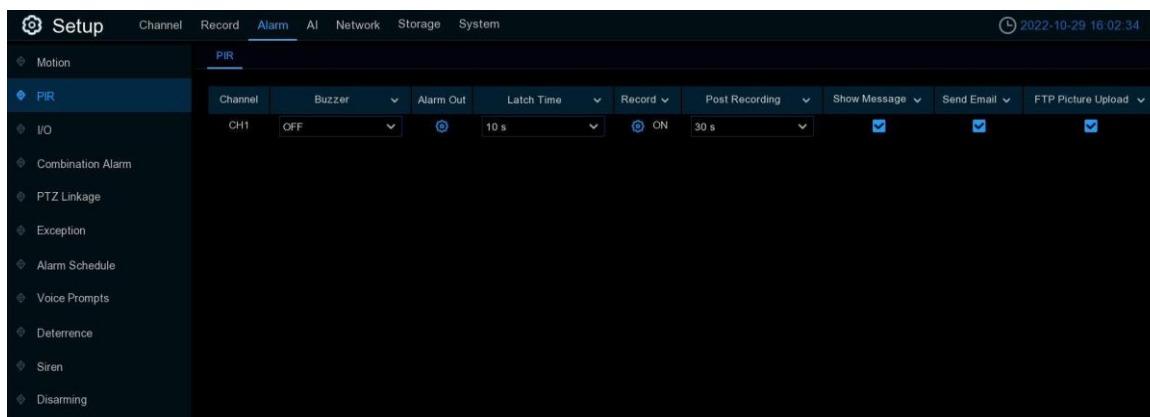

Buzzer: When PIR is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

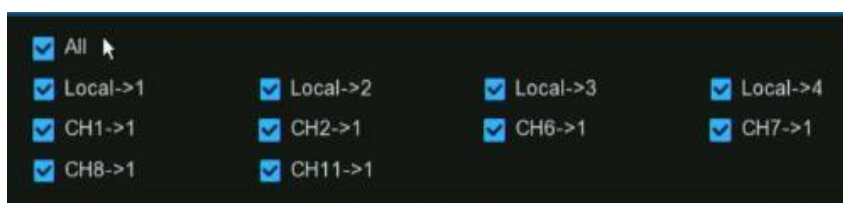

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when PIR is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

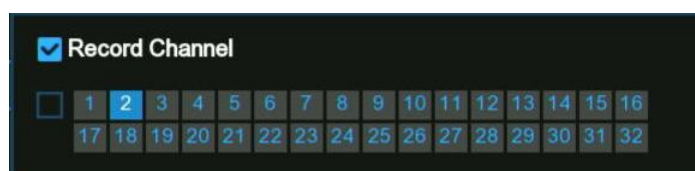

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon PIR will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)


FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.



PIR Detection: To configure the PIR detection. See more on **5.1.7. PIR**.


Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Apply: Click "Apply" to save settings.

5.3.3. I/O Alarm

If your NVR or the connected camera has alarm input function, you will need to configure the settings to make the connected sensor works probably.

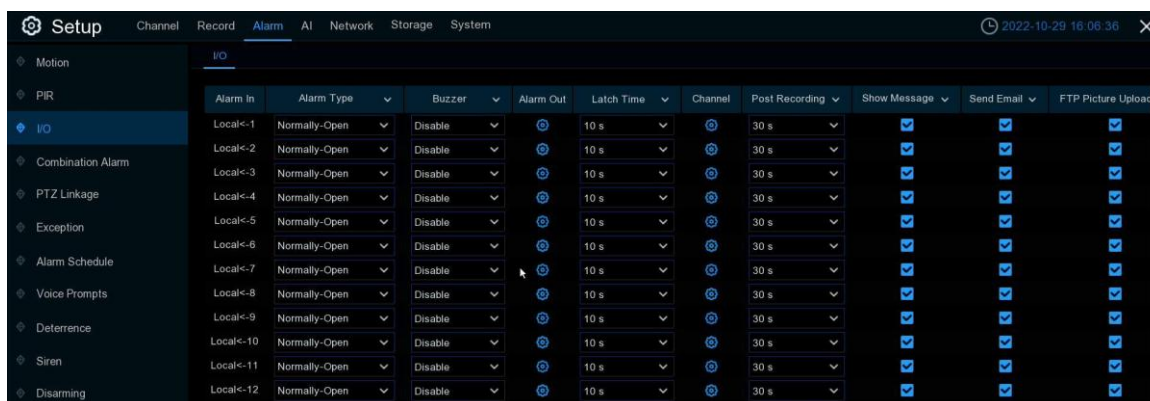


Alarm In: Alarm input channel

- **Local:** Alarm input devices connected to NVR
- **CHx<- 1:** Alarm input devices connected to IP camera.

Alarm Type: There are 3 types for your choice: Normally Open, Normally Closed, and OFF. Choose the one which is well-matched with your sensor, or choose OFF to close the sensor trigger function.

Buzzer: When IO alarm is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

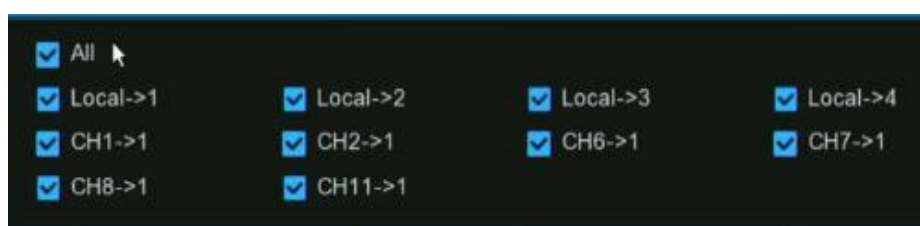

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

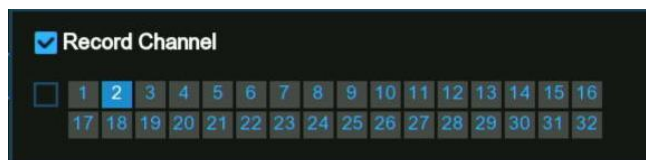

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)


FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.




Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.


Apply: Click "Apply" to save settings.

5.3.4. Combined Alarm

Combined Alarm function allows to set a combination of 2 alarm types. The NVR will only alert when both the alarm types in the combination are triggered in the same time. This would help to minimize the false alarm rate.

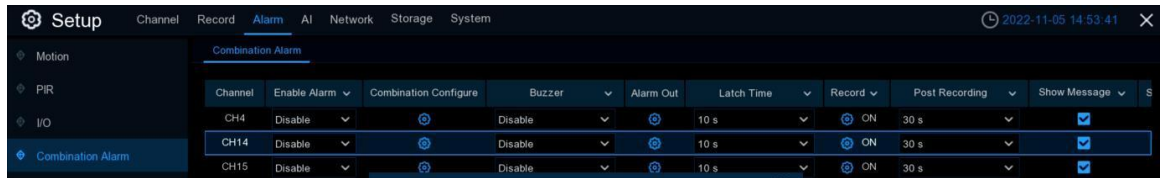


Enable Alarm : To enable or disable combined alarm. Click the Configuration button on a channel to choose the alarm combination. You're able to choose 2 kinds of alarm type from NVR and/or IP camera.

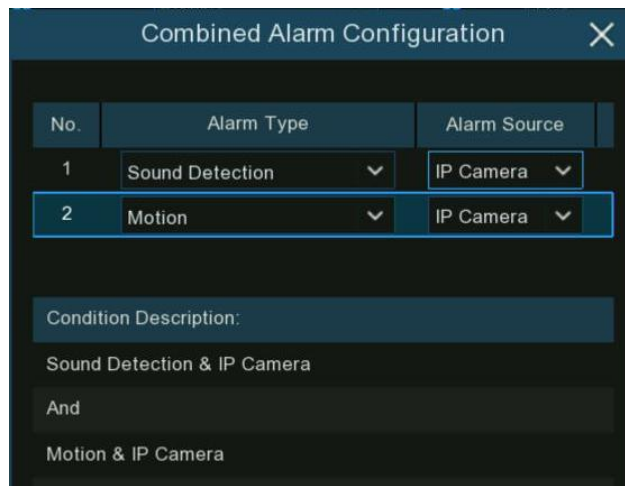

Note: If the combined alarm is enabled in a channel, all of the individual alarm functions you had set in that channel will be disabled. The individual alarm functions will be restored if the combined alarm function is disabled.

Buzzer: When the detection is triggered, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

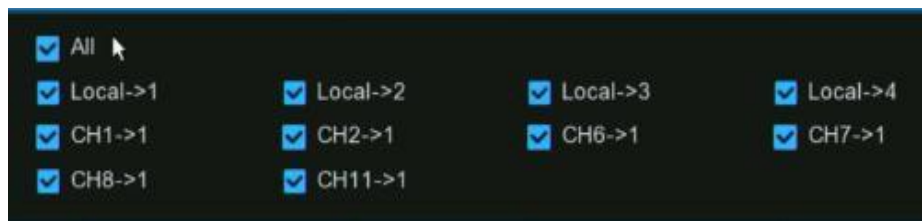

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when PIR is detected. Click the drop-down arrow to choose all channels to be recorded or not. icon, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to Click select all channels or click on the individual camera number that you want to trigger for recording.

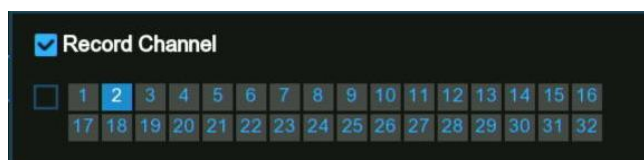

Post Recording: This option instructs your NVR to record for a set time after an event has occurred.

Show Message: When the detection is triggered, the alarm icons will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Tick the checkbox if you want to disable this.

Show Message ▾	Send Email ▾	FTP Picture Upload ▾	FTP Video Upload ▾	Picture to Cloud ▾	Video to Cloud	Full Screen ▾	Voice Prompts
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	
☒	☒	☒	☐	☒	☐	☐	

(Slide to the right to view more options)

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.

Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Apply: Click "Apply" to save settings.

5.3.5. PTZ Linkage

If there are one or more PTZ cameras connected to your NVR, you are able to set the actions of PTZ cameras when motion event, I/O sensor alarm and/or PIR alarm occurs, to move your PTZ cameras focusing on a selected preset position.

PTZ Linkage						
Channel	Switch	Alarm	PTZ1	PTZ2	PTZ3	PTZ4
CH1	☐		OFF	OFF	OFF	OFF
CH2	☐					OFF
CH3	☐					OFF
CH4	☐					OFF
CH5	☐					OFF
CH6	☐					OFF
CH7	☐					OFF
CH8	☐		OFF	OFF	OFF	OFF
CH9	☐		OFF	OFF	OFF	OFF

Switch: Tick the checkbox to enable the PTZ linkage function.

Alarm: Click settings button to choose the alarm source to enable the PTZ linkage function when the selected alarm occurs.

PTZ: For each channel, there are maximum 4 PTZ preset point positions available for you to set for the PTZ linkage function.

- Click settings button on PTZ 1~4, tick the check point to enable, and then select the channel of connected PTZ camera and choose a preset point.


☒ PTZ

CH9

1

5.3.6. Exception Alarm

The system allows to set the abnormal events that you want the NVR to inform you.

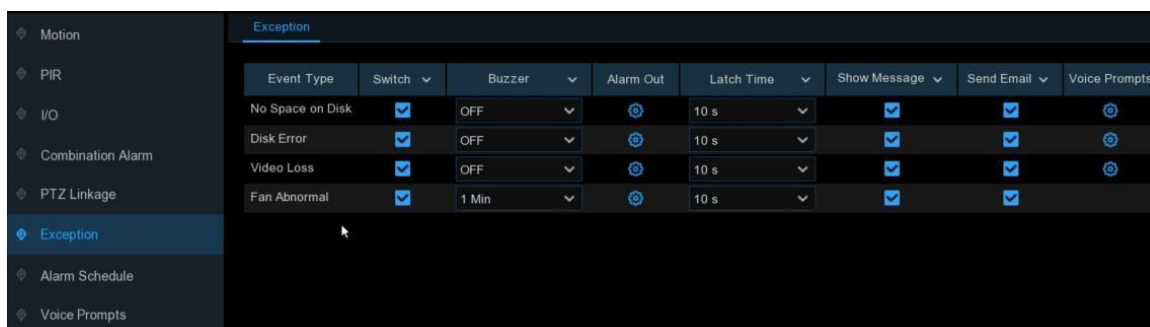


Event Type: There are three event types that your NVR will detect as an exception:

- **No Space on Disk:** no space left on the hard drive.
- **Disk Error:** a hard drive error.
- **Video Loss:** one or more channels have lost the connection.
- **Fan Abnormal:** An alarm is raised when the fan fails to operate properly, the fan is faulty, the rotating speed is low, or the fan stops. (It is supported by some models.)

Buzzer: When the detection is triggered, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.

Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

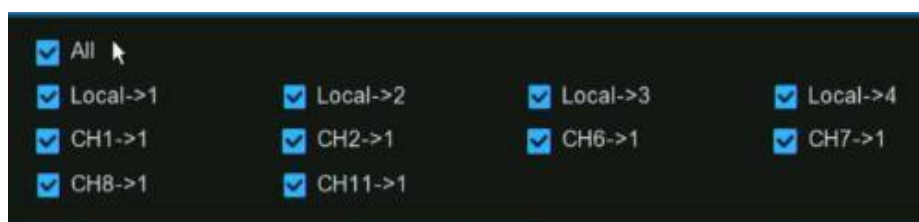

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.


Latch Time: To configure the external alarm time when the detection is triggered. **Show Message:** Check the box to display a message on the screen when No Space on Disk, Disk Error, or Video Loss event happens.

Send Email: Click the checkbox to enable your NVR to send an email alert when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.

5.3.7. Alarm Schedule


You are able to set the schedule individually for Alarm out, Push Notification, FTP Upload, Cloud Upload, Buzzer and Voice Prompts. The schedule is set to enable 24 hours 7 days, you can change accordingly.

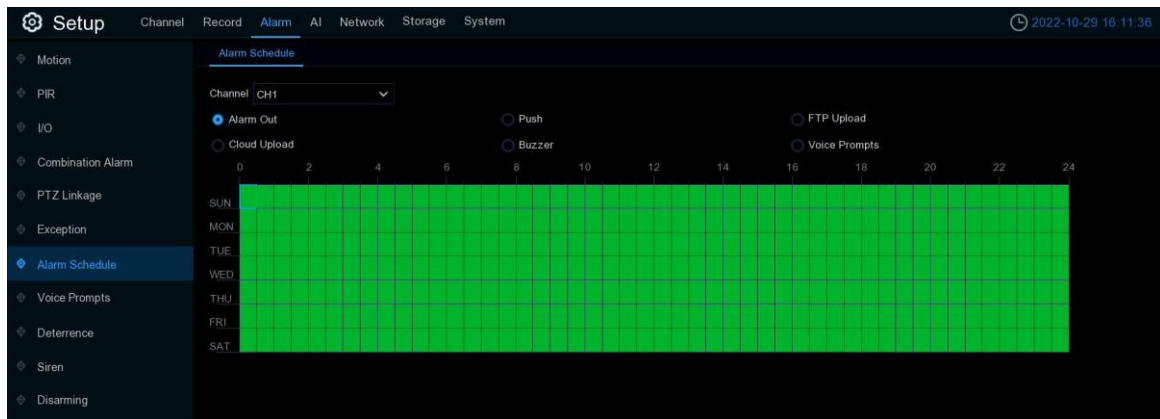

1. Select the channel you want to set the schedule.
2. Click on the radio button of the event you want to set.
3. Drag the cursor to mark the slots. The green blocks in the time slots will be active for alarm.
4. The schedule is valid only for the selected channel each time when you set. If you want to use the same schedule for other channels, use **Copy** function.
5. Click **Save** to save your settings.

5.3.8. Voice Prompts

If your NVR or IP camera supports the voice prompt function and has a built-in or external speaker, you can set a customized alert voice when an alarm event occurs.

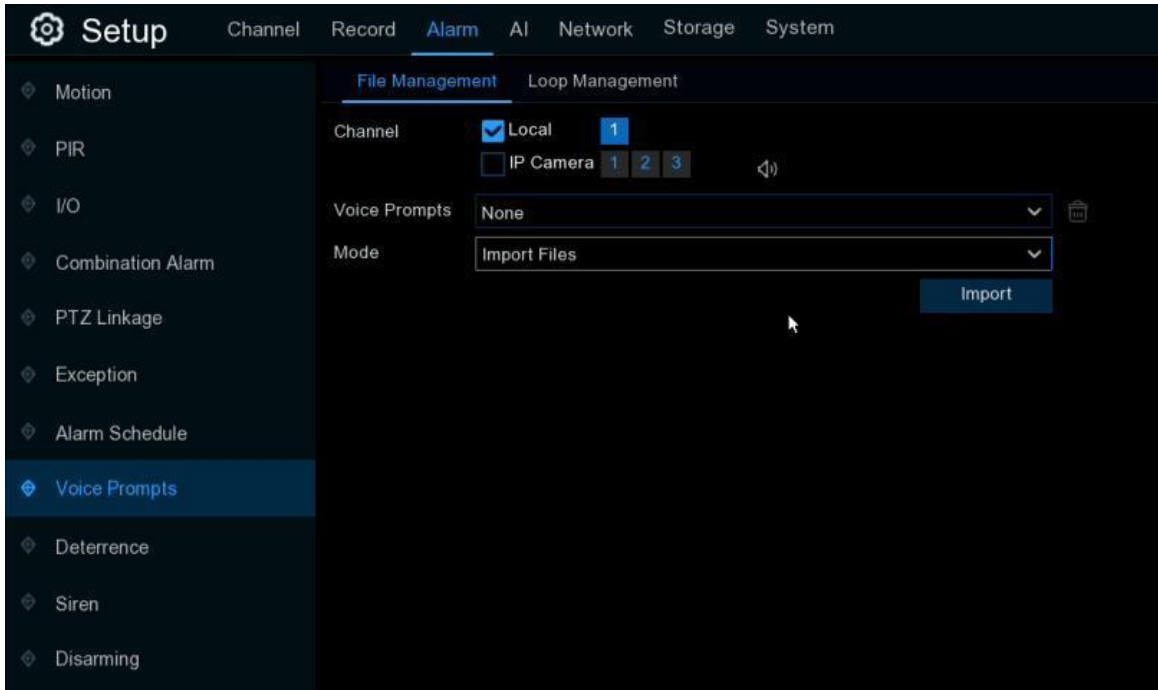

5.3.8.1. Voice File Management

You can create and delete voice files in this section.

5.3.8.1.1. Creating Voice Files

The system provides 3 different methods to create customized voices: **Import Files**, **Local Conversion** and **Internet Server Conversion**:

- **Import Files:** Supports to import MP3, WMA and WAV files from USB flash drive and/or web page. Choose **Import Files** model, and then click the **Import** button, and choose the audio file from your USB memory. It is allowed to add only 1 file at a time. You can add multiple files at a time in the web page.




- **Local Conversion:** The system supports to convert your plain texts into an audio file by local algorithm. Choose **Local Conversion** model, and then input the name of the

file & plain text. Click **Import** button, the system will convert the text you input into a voice file and save to the NVR storage.



The screenshot shows the 'File Management' tab in the software interface. Under the 'Channel' section, 'Local' is checked and 'IP Camera' is unchecked. The 'Voice Prompts' dropdown is set to 'None'. The 'Model' dropdown is highlighted with a red box and shows 'Local Conversion'. The 'Language' dropdown is set to 'ENGLISH'. The 'Name' field contains 'private zone'. The 'Plain Text' field contains 'Warning: this is a private zone, do not enter'. An 'Import' button is located at the bottom right.

- **Internet Server Conversion** : The system supports to convert your plain texts into a multi-language audio file by internet server.
- Choose **Local Conversion** model and language you want to speak, and then input the name of the file & plain text. Click **Import** button, the system will convert the text you input into a voice file and save to the NVR storage.

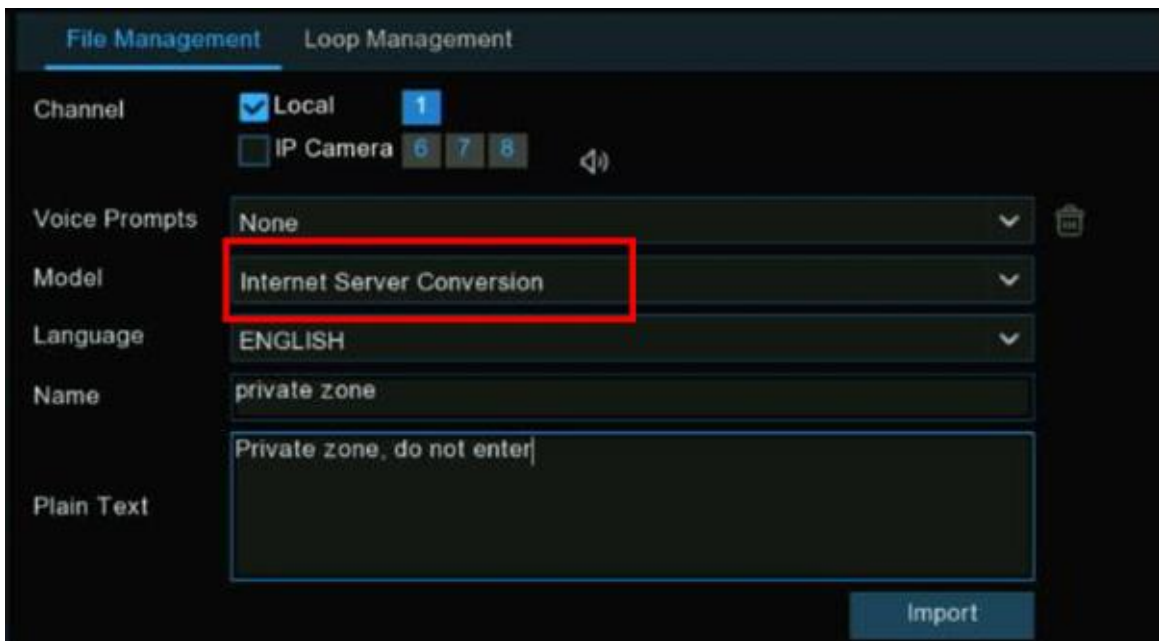

The screenshot shows the 'File Management' tab in the software interface. Under the 'Channel' section, 'Local' is checked and 'IP Camera' is unchecked. The 'Voice Prompts' dropdown is set to 'None'. The 'Model' dropdown is highlighted with a red box and shows 'Internet Server Conversion'. The 'Language' dropdown is set to 'ENGLISH'. The 'Name' field contains 'private zone'. The 'Plain Text' field contains 'Private zone, do not enter'. An 'Import' button is located at the bottom right.

It is recommended to operate with webpage for multi-language input.

5.3.8.1.2. Audition Voice

After creating your voice files, you are able to audition them with your NVR and/or IP camera's speaker.




1. Select a voice file firstly. Choose the voice playing device. **Local** indicates the NVR audio output device, **IP Camera** indicates the speaker or audio output

2. device in the IP camera.

3. Click the play button to audition.

5.3.8.1.3. Delete Voice Files

If you want to delete the voice file(s), please operate as below:

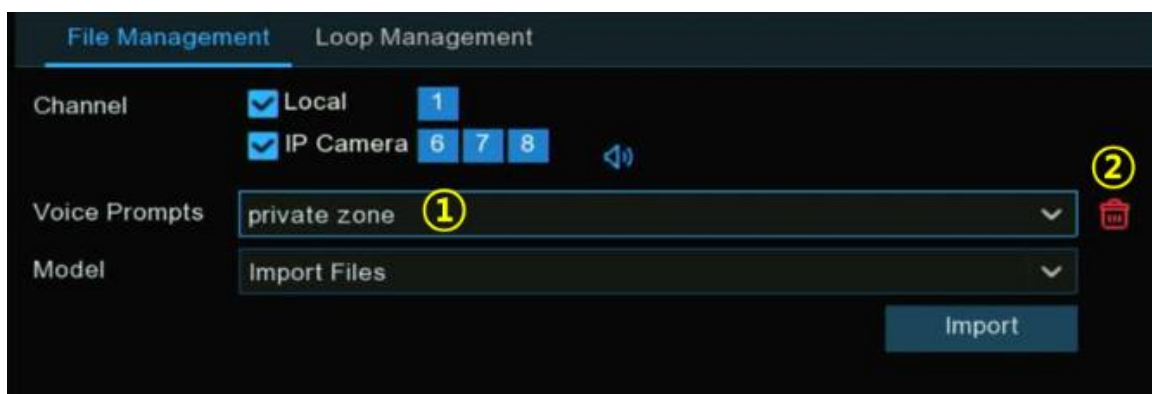

1. Select a voice file firstly.

2. Click the delete button to delete the file.

3. Repeat step 1 and 2 to delete another file.

5.3.8.2. Loop Management

The system allows to play a continuous loop of the voices in a certain period of time.




1. Select the play device.
2. Choose a voice file.
3. Set the time period.
4. Click play button to start the audition.
5. Click add button to add another loop playlist. Maximum 12 playlists can be set.
6. If you want delete the loop playlist, click the delete button.
7. Click **Apply** to save your settings.

Note: The period of time in each playlist cannot be overlapped to others.


5.3.9 Deterrence

This menu allows you to configure the action of built-in white lights (also known as "spotlights") and speaker of the deterrence cameras when an alarm event is detected.

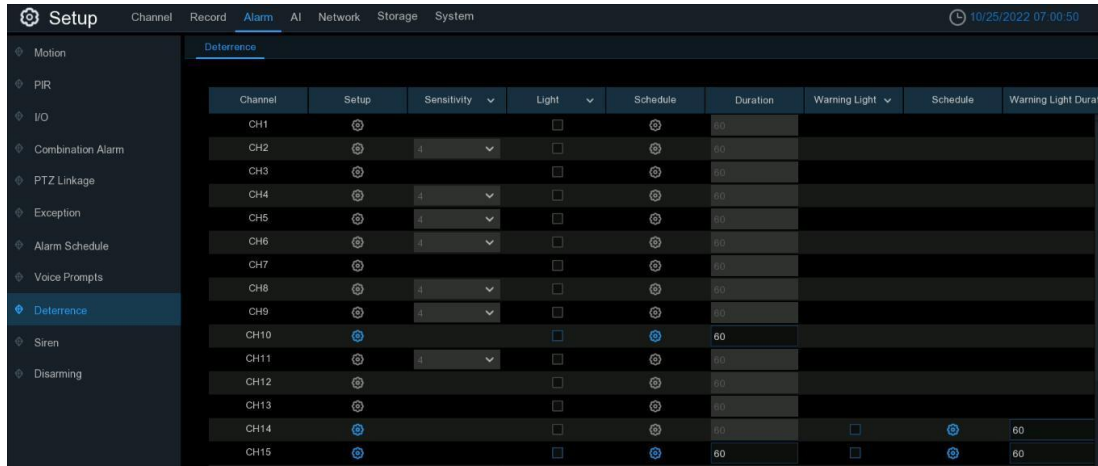

Channel	Setup	Sensitivity	Light	Schedule	Duration	Warning Light	Schedule	Warning Light Duration
CH1	⊕		☐	⊕	60			
CH2	⊕	4	☐	⊕	60			
CH3	⊕		☐	⊕	60			
CH4	⊕	4	☐	⊕	60			
CH5	⊕	4	☐	⊕	60			
CH6	⊕	4	☐	⊕	60			
CH7	⊕		☐	⊕	60			
CH8	⊕	4	☐	⊕	60			
CH9	⊕	4	☐	⊕	60			
CH10	⊕		☐	⊕	60			
CH11	⊕	4	☐	⊕	60			
CH12	⊕		☐	⊕	60			
CH13	⊕		☐	⊕	60			
CH14	⊕		☐	⊕	60	☐	⊕	60
CH15	⊕		☐	⊕	60	☐	⊕	60

Setup: Click settings button to enter configuration page.

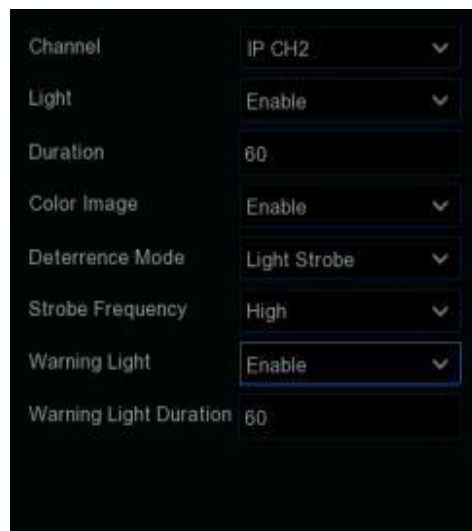


Channel	IP CH2
Light	Enable
Duration	60
Color Image	Enable
Deterrence Mode	Light Strobe
Strobe Frequency	High
Warning Light	Enable
Warning Light Duration	60

- **Light:** Click the drop-down menu to enable the camera's white light.
- **Light Brightness:** For some certain cameras, you can adjust the flood light value. The greater the value, the brighter the light will be.
- **Duration:** This lets you change the length of time the white light will remain lit when alarm is detected. Adjust accordingly.
- **Color Image :** If enabled, the night vision images will be turned to be colorful. If disabled, the night version images will remain black & white.
- **Deterrence Mode:** Click the drop-down menu to select a solid light (**Warning Light**) or a flashing light (**Strobe Light**). When picking **Strobe Light**, you can select a low, medium or high **Strobe Frequency** setting. **Warning Light :** Click the drop-down menu to enable the camera's warning light.


- **Warning Light Duration** : This lets you change the length of time the warning light will remain lit when alarm is detected.
- Adjust accordingly.

Schedule: Click settings button to configure the deterrence schedule: When the camera is connected to the NVR with client port, the schedule interface might be displayed as below image:

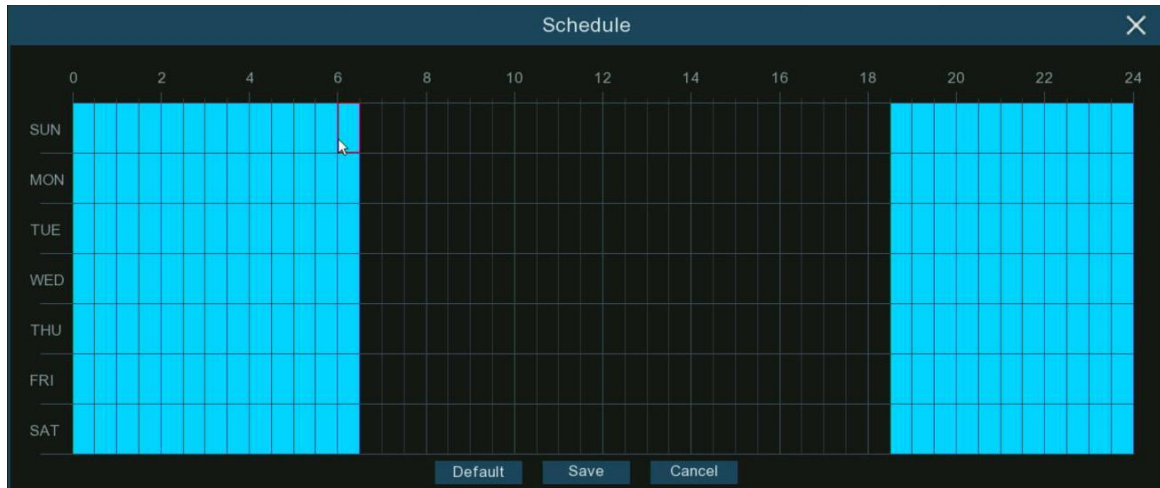

By default, the white lights will not trigger between and 04:30 p.m. and 06:30 a.m., however you can change this according to your needs. Each square represents 30 minutes. Using the mouse, click on a particular square to change or click and drag the mouse over the squares corresponding to your desired period. Squares in blue color are active for deterrence. Click "**Save**" to save changes made. Right-click the mouse to exit.


When the camera is connected to the NVR with web port, the schedule interface might be displayed as below image:

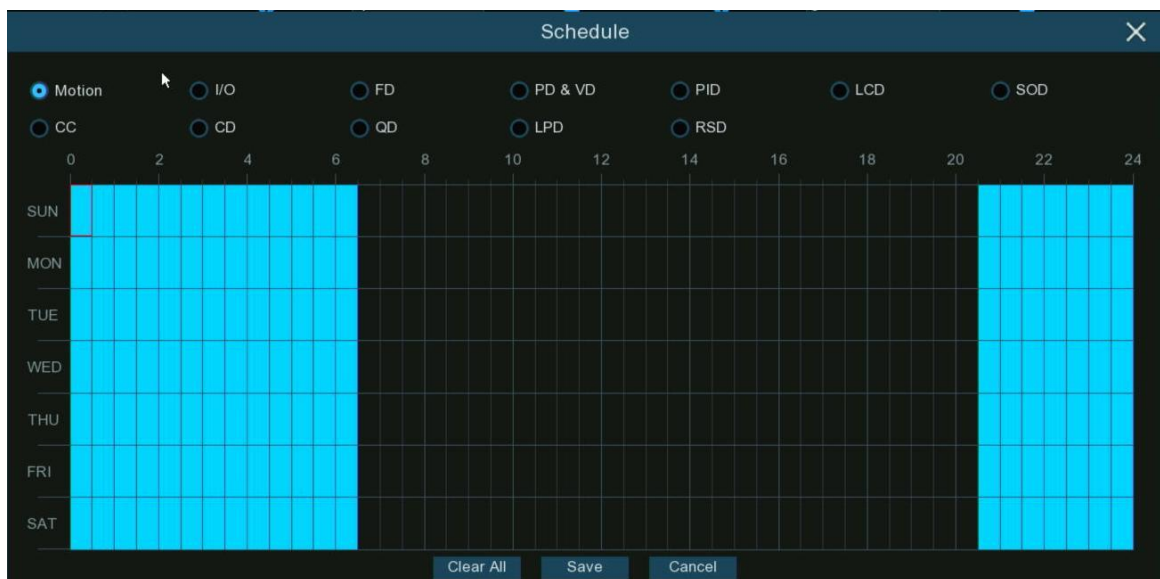

All supported alarm types are listed, you're able to configure the schedule for each individual alarm type. Click the checkbox of the alarm type you want to set, and then set the schedule accordingly. Click "**Save**" to save changes made. Right-click the mouse to exit.

5.3.10. Siren

If the camera connected to the device has a built-in speaker, you can set the siren-related parameters in this module.

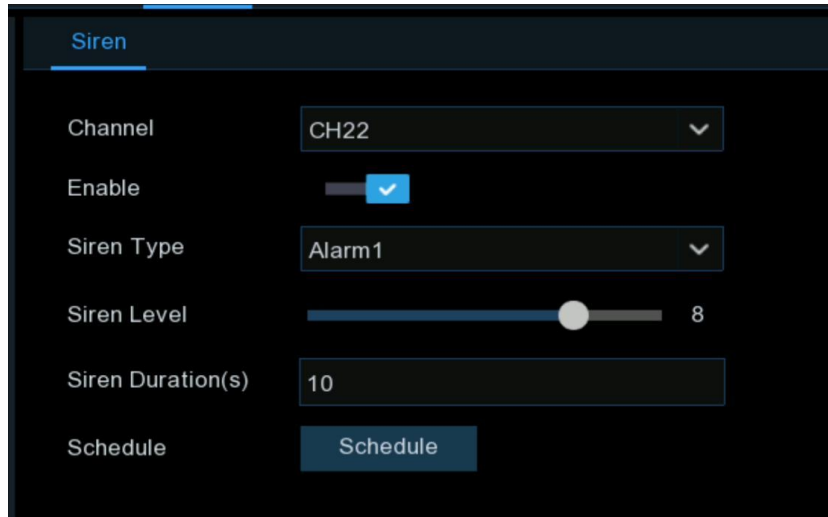

Channel: Select the switch channel.


Enable: Used to set whether to enable the siren function.

Siren Type: Used to select the siren audio file. By default two audio files are provided. You can also import three customized audio files (of PCM format or WAV format). The audio sample rate of the imported file cannot exceed 8000 Hz, and the file size cannot exceed 256 KB. After you select a customized audio file to be imported, a **Delete** button appears on the right of the file, and you can click the **Delete** button to delete the audio file. (Note: This function is supported by some IP cameras only.)

File Name: If you select **User-defined** for **Siren Type**, you can enter the file name and click the **Import** button on the right to import the customized audio file from a USB flash disk.

Siren Level: Used to set the siren volume level, which ranges from 1 to 10. The higher the level is, the louder the volume is. **Siren Duration(s):** Used to set the siren duration. You can adjust the value between 5 to 180 seconds.

Schedule: If the IP camera is connected to the NVR via the HTTP port, you can click the **Schedule** button to open the setting page.

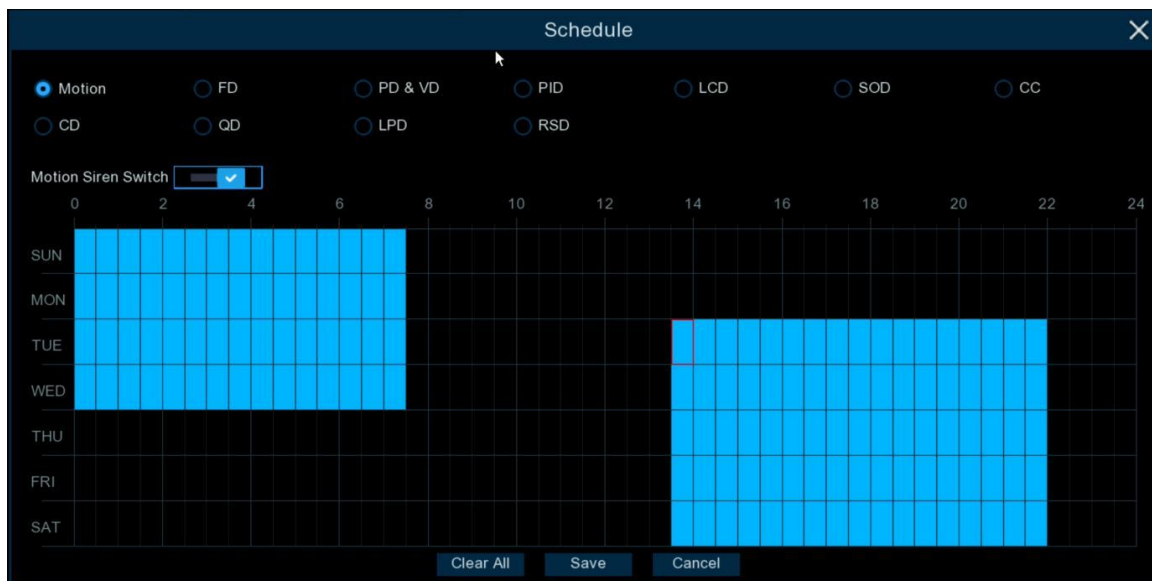


If a channel is selected in the schedule, it indicates that the channel can trigger siren alarms during the corresponding period. You can set the siren linkage alarm and effective time of a function by selecting the corresponding function sub-tab and switch.

Clear All: Click this button to clear the selected status on all sub-tabs.

5.3.11.Disarming

After the one-click disarming function is enabled, you can cancel the response of the device to various alarms. On this page you can set the relevant parameters including the disarming switch, channel, type, and schedule. **Note:** The Exception system alarms are not controlled by one-click disarming.

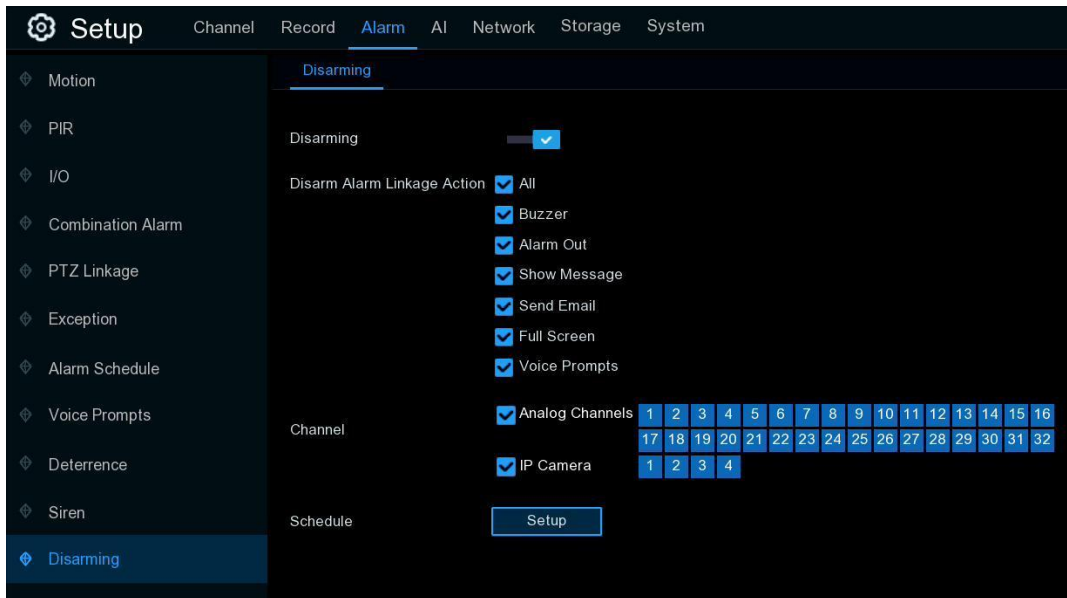

Disarming: Used to set whether to enable the one-click disarming function.

Disarm Alarm Linkage Action: Used to set the alarm linkage types to be disarmed.

All: Select or clear all the types.

Buzzer: Used to set whether to enable the buzzer. When the one-click disarming function is enabled, you can select this option to disable the buzzer.

Alarm Out: Used to set whether to enable external alarm output. When the one-click disarming function is enabled, you can select this option to disable the external alarm device when an alarm is triggered.

Show Message: Used to set whether to display messages. When the one-click disarming function is enabled, you can select this option to not display the alarm messages when motion is detected on the preview page.

Send Email: Used to set whether to send emails. When the one-click disarming function is enabled, you can select this option to make the NVR not automatically send an email when an alarm is triggered.

Full Screen: Used to set whether to display in full screen. When the one-click disarming function is enabled, you can select this option to make the channel configured with full-screen mode not enter full screen mode on the preview screen when the channel triggers an alarm.

Voice Prompts: Used to set whether to enable voice prompts. When the one-click disarming function is enabled, you can select this option to disable voice prompts when a channel configured with voice prompts triggers an alarm.


Channel: Select the channels to be disarmed.



Schedule: Click the **Setup** button to open the schedule setting page. If a channel is selected in the schedule, it indicates that the channel is in disarming status within the corresponding period.

5.4. AI

Artificial Intelligence (AI) is an advanced function for the system to detect varies of alarm events based on face detection, human detection and vehicle detection technology with AI powered IP cameras and take actions accordingly. You will see this section if your NVR has AI capacity.

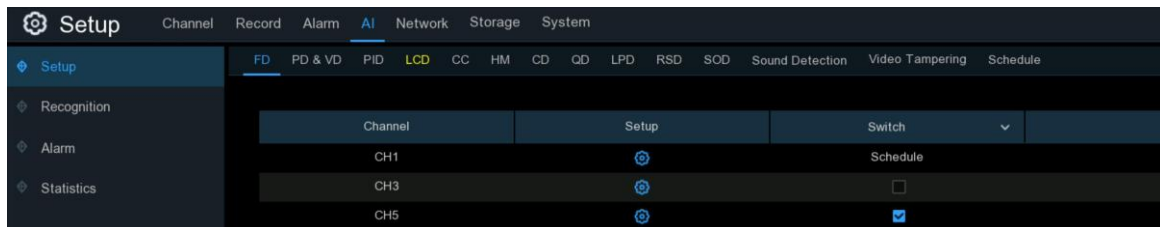


5.4.1. AI Setup

In this section, you will able to activate the AI functions and let them work properly according to your requirements.

Note: The detection functions, including Face Detection, Human & Vehicle Detection, Perimeter Intrusion Detection, Line Crossing Detection, Cross Counting, Crowd Density Detection, Queue Length Detection and License Plate Detection, might be mutually exclusive due to performance limitation. When the checkbox of Switch is in grey color and unable to check, that means another AI function was enabled in this camera already.


5.4.1.1. FD (Face Detection)

Enabling this function is a great way to improve how you monitor the different areas that you want to keep an eye on. When human faces are detected, your NVR will activate recording, and it will also send an alert. This makes it ideal for restricted places where there shouldn't be people roaming around at particular times.

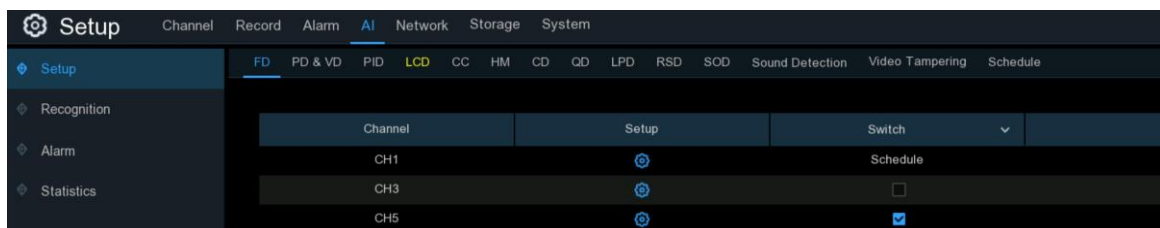

Switch: Tick the checkbox to enable the face detection.

Setup: Click setup button for further settings:

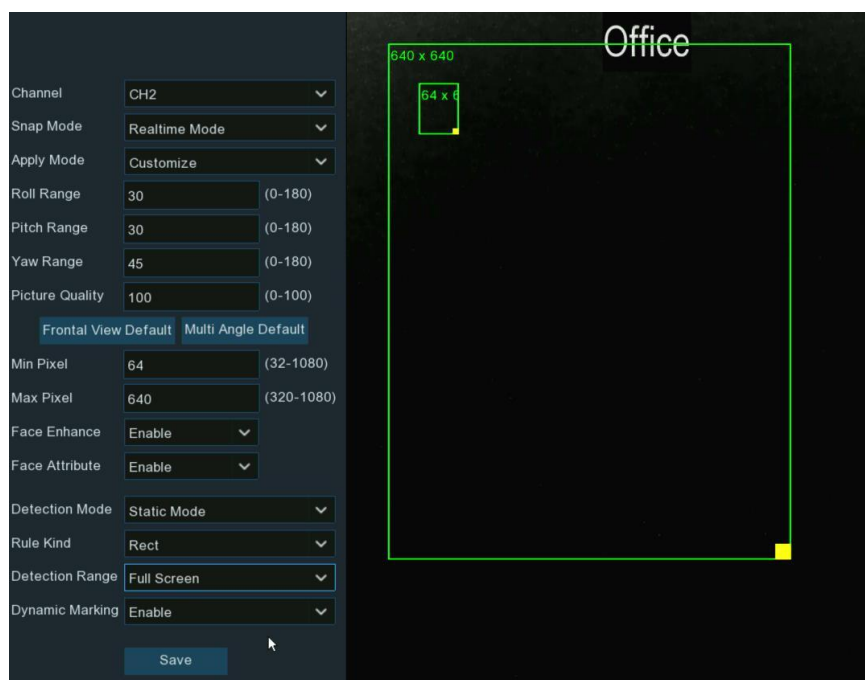

Channel: to choose the channel you want to set.

Snap Mode: select how snapshots containing a recognized face will be captured. This can affect the number of facial recognition notifications that you will receive:

- **Realtime Mode:** the camera tracks and captures the face of someone entering and leaving the facial detection area. You'll get two notifications in the Alarm Notification Panel - once when the face is first detected and again as the face leaves the facial detection area. This is useful if you want to continuously monitor someone's presence in an area and get alerts in real-time.
- **Optimal Mode:** a single, best snapshot of the face is captured.
- **Interval Mode:** you can specify the number of snapshots to take and the time interval between snapshots.

Snap Num: the number of snapshots to take

Snap Frequency: the time interval between snapshots

Apply Mode: There are three options available:

Frontal View: the facial recognition engine is optimized to scan for faces approaching the camera straight-on.

Multi Angle: the facial recognition engine is optimized to scan for faces approaching the camera from different angles.

Customize: the facial recognition engine is optimized to scan for faces approaching the camera from customized angles

Roll Range: set the range of face rotation.

Pitch Range: set the range of face pitch

Yaw Range: set the range of face horizontal flipping

Picture Quality: set the picture quality

Frontal View Default: to load default values of front view

Multi Angle Default: to load default values of multi angle view

Min Pixel: The minimum face size in pixels. The smaller the number of pixels, the more faces the camera can recognize. If the camera is recognizing too many unwanted distant faces, try increasing the minimum pixel value to train the camera to look for larger faces that are typically at a closer distance.

Max Pixel: The maximum face size in pixels. If you would like the camera to detect faces within proximity to each other, try increasing the maximum pixel value, otherwise leave the default value.


Face Enhance: Face enhancement makes it easier to recognize the moving faces, but it may lower the whole picture quality.

Face Attribute: Enable this function to detect gender, age, mask, glasses and facial expression.


Detection Mode: In Static Mode, all objects in the camera's field of view will be analyzed. In Motion Mode, only moving objects will be analyzed.

Rule Kind: **Rect** (rectangular) and **Line** (linear):098

- If you choose **Rect** mode, you can choose "**Full Screen**", the entire view of the camera is enabled for face detection as the detection area, or you can choose "**Customize**" to adjust the size of rectangular to focus the detection in a certain area.

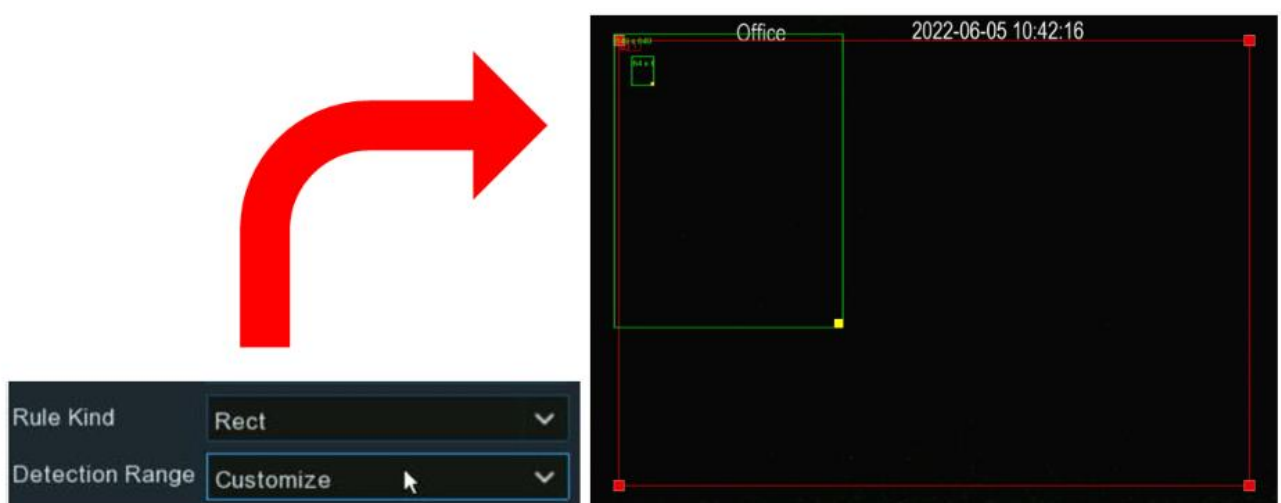


- If you choose **Line** mode, you need to adjust the position, length of the line, and choose the detection direction from B→A or A→B.

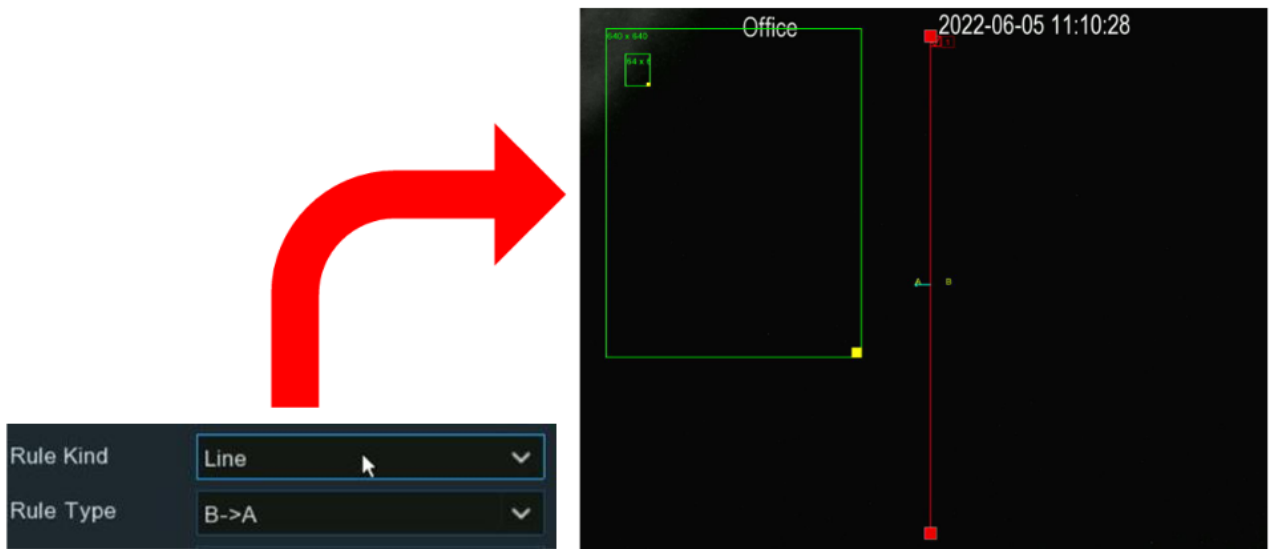

Dynamic Marking : If Disable is selected, the green tracking frame that surrounds a detected face will not be visible during Live View mode and playback.


5.4.1.2. PD & VD (Human & Vehicle Detection)

When human beings and/or vehicles are detected, your NVR will activate recording, and it will also send an alert.

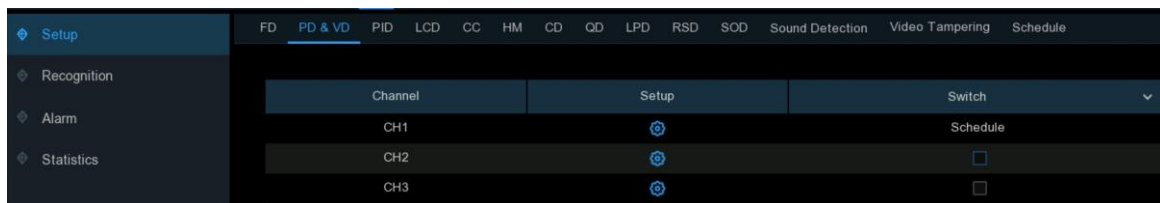

Switch: Tick the checkbox to enable the human & vehicle detection.

Setup: Click setup button for further settings:

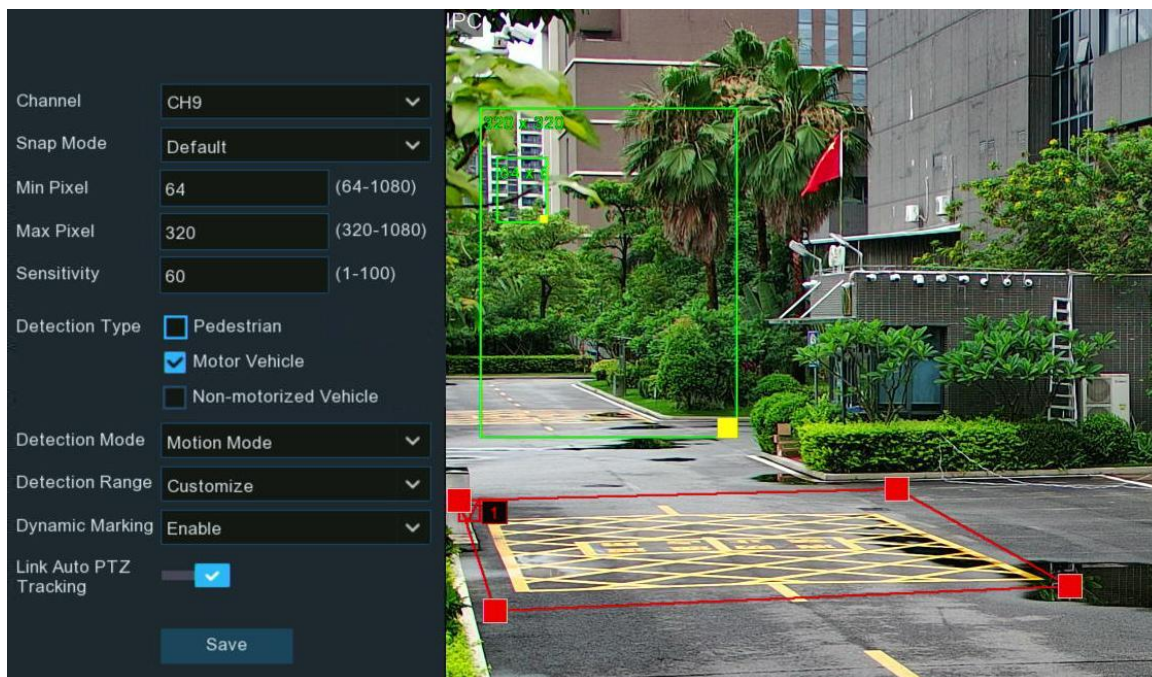

Channel: to choose the channel you want to set.

Snap Mode: select how snapshots containing a recognized object will be captured. This can affect the number of notifications that you will receive:

- **Default:** a single, best snapshot of the detected object is captured.
- **Realtime Mode:** the camera tracks and captures the objects entering and leaving the detection area. You'll get two notifications in the Alarm Notification Panel - once when the object is first detected and again as the object leaves the detection area. This is useful if you want to continuously monitor the object in an area and get alerts in real-time.
- **Interval Mode:** you can specify the number of snapshots to take and the time interval between snapshots.

Snap Num: the number of snapshots to take 1.

Snap Frequency: the time interval between snapshots 2.

Min Pixel: The minimum object size in pixels. The smaller the number of pixels, the more objects the camera can recognize. If the camera is recognizing too many unwanted distant objects, try increasing the minimum pixel value to train the camera to look for larger objects that are typically at a closer distance.

Max Pixel: The maximum object size in pixels. If you would like the camera to detect objects within proximity to each other, try increasing the maximum pixel value, otherwise leave the default value.

Sensitivity: Adjust the sensitivity level of the detection area. The higher the number, the more sensitive it will be when detecting objects.

Detection Type: to choose the detection targeted object.

Detection Mode: In Static Mode, all objects in the camera's field of view will be analyzed. In Motion Mode, only moving objects will be analyzed.

Detection Area: If you choose "Full Screen", the entire view of the camera is enabled for human and/or vehicle detection as the detection area, or you can choose "Customize" to adjust the size of rectangular to focus the detection in a certain area. **Dynamic Marking** : If Disable is selected, the green tracking frame that surrounds a detected object will not be visible during Live View mode and playback.

PTZ Auto Tracking: If your PTZ camera is connected, you might see this function. Enable to activate the PTZ auto tracking function. View more on **5.1.4.1.2.1 Controlling PTZ**.

5.4.1.3. PID (Perimeter Intrusion Detection)

Perimeter Intrusion Detection function detects people, vehicle or other objects which enter and loiter in a pre-defined virtual region, and some certain actions can be taken when the alarm is triggered.

Setup

Recognition

Alarm

Statistics

FD

PD & VD

PID

LCD

CC

HM

CD

QD

LPD

RSD

SOD

Sound Detection

Video Tampering


Schedule

Channel	Setup	Switch	Sensitivity
CH1		Schedule	3
CH2		☐	3
CH3		☐	3

Switch: To enable or disable the Perimeter Intrusion Detection.

Sensitivity: Adjust the sensitivity level of the perimeter intrusion region. The higher the number, the more sensitive the intrusion region will be.

Setup: Click settings to configure the detection conditions.

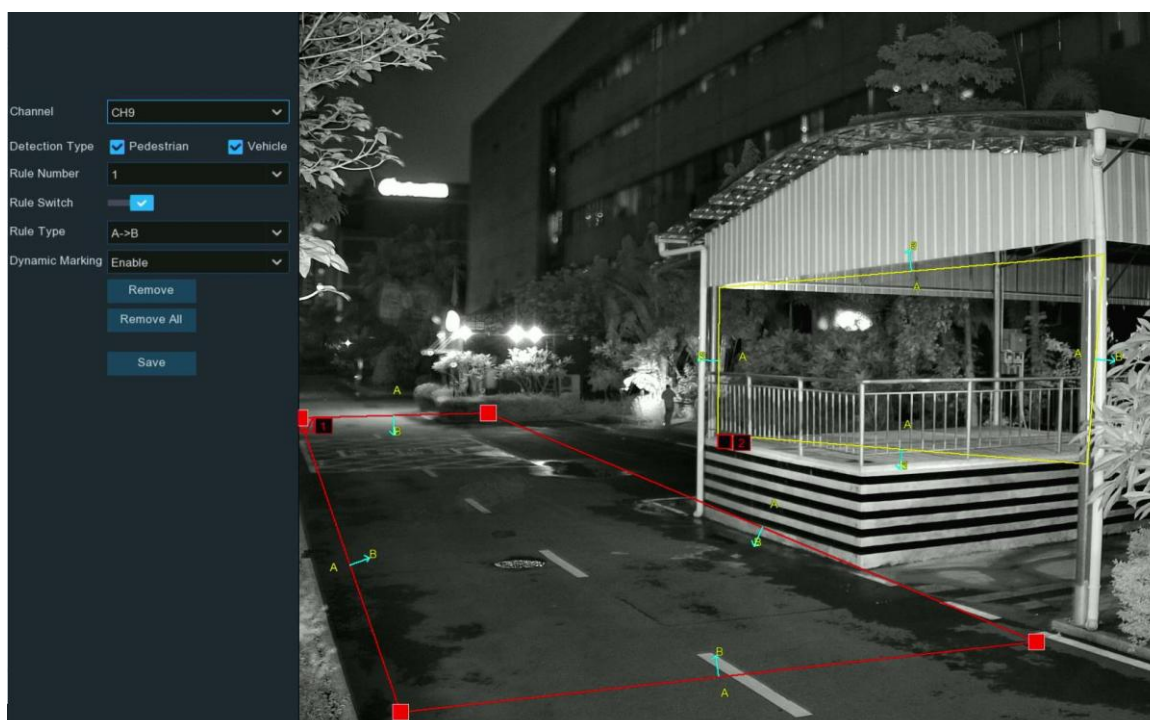

1. Select the channel you want to configure.
2. Select the detection targeted object.
3. Choose one of the **Rule Number**. It is the number of PID area. Maximum 4 areas you can set for PID function.
4. To enable the detection in **Rule Switch**.
5. Choose a **Rule Type**:
 - A>B: Camera will only detect the action from side A to side B;
 - B<A: Camera will only detect the action from side B to side A;
 - A<>B: Camera will detect the action from either side B to side A or side A to side B.
6. Use your mouse to click 4 points in the camera image to draw a virtual region. The shape of the region should be a convex polygon. Concave polygon will be not able to save.
7. Click **Save** to save your settings.
8. If you want to modify the position or shape of region, click the red box in the region, the borders of the region will be changed to red color. Long press the left button of your mouse to move the position of the region, or drag the corners to resize the region.
9. If you want to remove one of the regions from the camera image, click the red box in the region and then click **Remove** button. Click **Remove All** will delete all regions.
10. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.

5.4.1.4. LCD (Line Crossing Detection)

Line Crossing Detection function detects people, vehicle or other objects which cross a pre-defined virtual line, and some certain actions can be taken when the alarm is triggered.

Setup

Recognition

Alarm

Statistics

FD

PD & VD

PID

LCD

CC

HM

CD

QD

LPD

RSD

SOD

Sound Detection

Video Tampering

Schedule

Channel	Setup	Switch	Sensitivity
CH1		Schedule	2
CH2		☐	2
CH3		☐	3

Switch: To enable or disable the Line Crossing Detection.

Sensitivity: Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.

Setup: Click settings to configure the detection conditions.



1. Select the channel you want to configure.
2. Select the detection targeted object.
3. Choose one of the **Rule Number**. It is the number of LCD lines. Maximum 4 lines you can draw.
4. To enable the detection in **Rule Switch**.
5. Choose a **Rule Type**:
 - A>B: Camera will only detect the action from side A to side B;
 - B<A: Camera will only detect the action from side B to side A;
 - A<>B: Camera will detect the action from either side B to side A or side A to side B.
6. Use your mouse to click 2 points in the camera image to draw a virtual line.
7. Click **Save** to save your settings.
8. If you want to modify the position or length of the line, click the red box in the line, the color of the line will be changed to red color. Long press the left button of your mouse to move the line, or drag the terminals to modify the length or position of the line.
9. If you want to remove one of the lines from the camera image, click the red box in the line and then click **Remove** button. Click **Remove All** will delete all lines.
10. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.

5.4.1.5. CC (Cross Counting Detection)


Cross Counting function will count the times an object or person has crossed a counting line from both directions, and some certain actions can be taken when the alarm is triggered.

Setup	FD	PD & VD	PID	LCD	CC	HM	CD	QD	LPD	RSD	SOD	Sound Detection	Video Tampering	Schedule
Recognition														
Alarm														
Statistics														
	Channel	Setup	Switch	Sensitivity										
	CH1		Schedule	2										
	CH2		☒	2										
	CH3		☒	3										

Switch: To enable or disable the cross-counting function.

Sensitivity: Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.

Setup: Click settings to configure the detection conditions.

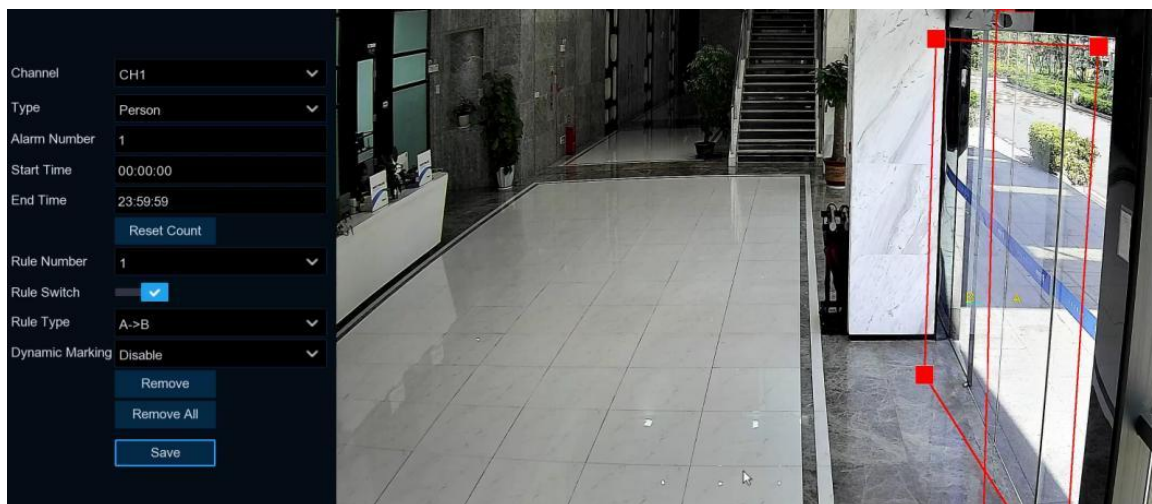

1. Select the channel you want to configure.

2. Select the detection targeted object:

- **Motion:** All moving subjects will be detected by the system
- **Person:** Only human beings will be detected
- **Vehicle:** Only vehicles will be detected.

3. Input the **Alarm Number**. The NVR will send an alert if the number of entries minus the number of exits exceeds the alarm number. E.g., the number of entries is 601 while the number of exits is 400, and the alarm number you set is 200, $601-400=201 > 200$, then the NVR will send an alert.

4. Set the detection start time.


5. Set the detection end time.

6. To enable the detection in **Rule Switch**.

7. Choose a **Rule Type**:

- **A-B:** If a targeted object is detected moving from side A to side B, the system will count 1 to enter number; if a target object is detected moving from side B to side A, the system will count 1 to exit number.
- **B-A:** If a targeted object is detected moving from side B to side A, the system will count 1 to enter number; if a targeted object is detected moving from side A to side B, the system will count 1 to exit number.

8. Use your mouse to click 2 points in the camera picture to draw a virtual line. You will see a rectangular box coming along with the line together. Only the subject touches the borders in both sides will be recorded as a complete cross. Adjust the size of the rectangular box according to the mounting position of camera and the size of expected detection target.

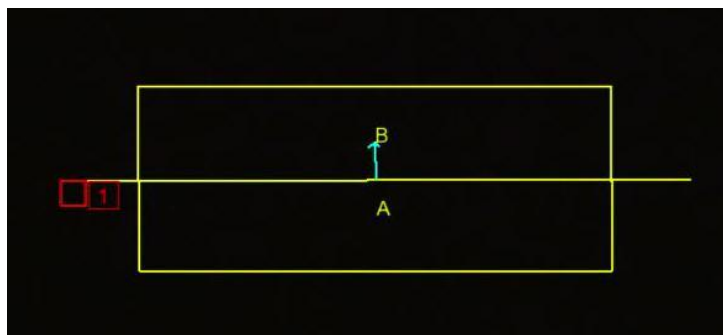


9. Click **Save** to save your settings.

10. If you want to modify the position or length of the line, click the red box in the line, the color of the line will be changed to red color. Long press the left button of your mouse to move the line, or drag the terminals to modify the length or position of the line.

11. If you want to remove the line from the camera picture, click the red box in the line and then click **Remove** button or click **Remove All** directly.

12. The statistical data of cross counting will be displayed on the left top corner of the image.

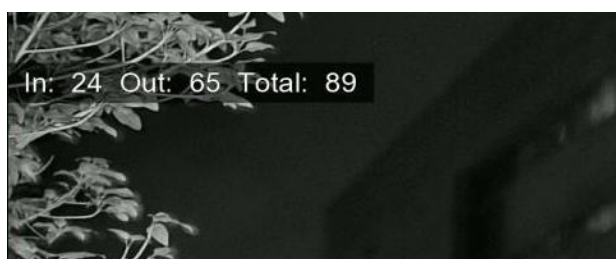


13. If you want to clear the statistical data of cross counting, click the **Reset Count** button.

14. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.


5.4.1.6. HM (Heat Map)

Heat Map is a video analytics tool to provide a graphic overlay in the form of a heat map displaying the area and frequency of motion detected. This is especially useful for retail businesses to track customer movement to better understand consumer behavior. It can also be used to evaluate the traffic of populated areas such as amusement parks or museums.

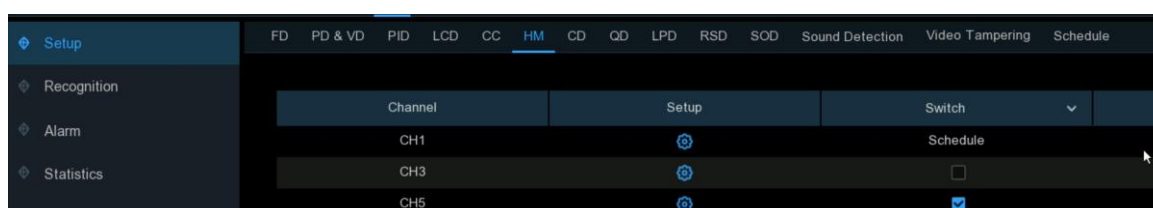

Switch: To enable or disable the heat map function.

Setup: Click settings to configure the detection area.

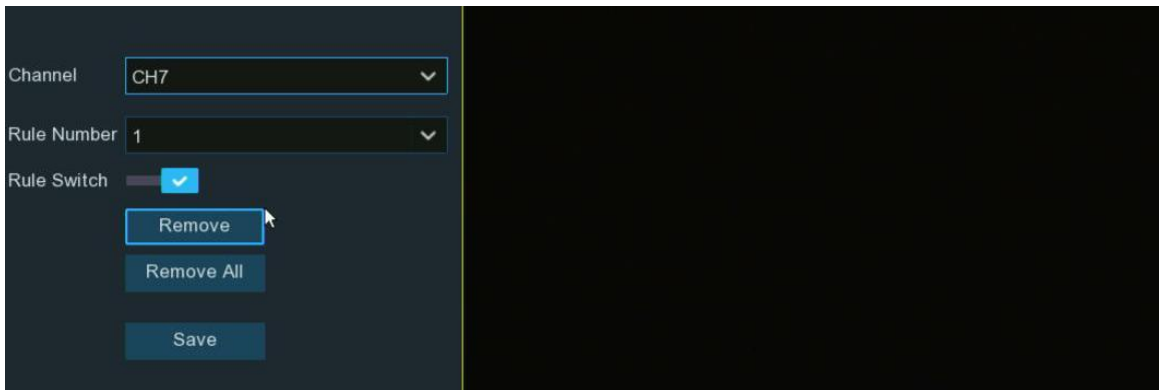

1. Select the channel you want to configure.
2. To enable the detection in Rule Switch.
3. As default, the whole image will be activated as heat map region. If you want to modify the region, click the red box on the top left corner, and then the borders of the region will be changed to red color. Click and hold each red-colored square to adjust the heat map region.
4. Click **Save** to save your settings.
5. If you want to delete the region, Click **Remove All**.

5.4.1.7. CD (Crowd Density Detection)


Crowd density detection is based on face detection technology, which is used to detect crowd gathering to maintain a controllable order in certain area. When the total number of detected people in a certain area exceeds the pre-set allowed number, the system will send an alert.

Setup	FD	PD & VD	PID	LCD	CC	HM	CD	QD	LPD	RSD	SOD	Sound Detection	Video Tampering	Schedule
Recognition														
Alarm														
Statistics														
	Channel	Setup	Switch	Sensitivity										
	CH1		Schedule	2										
	CH3		☐	1										
	CH5		☐	2										

Switch: To enable or disable the crowd density detection function.

Sensitivity: Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.

Setup: Click settings to configure the detection condition:

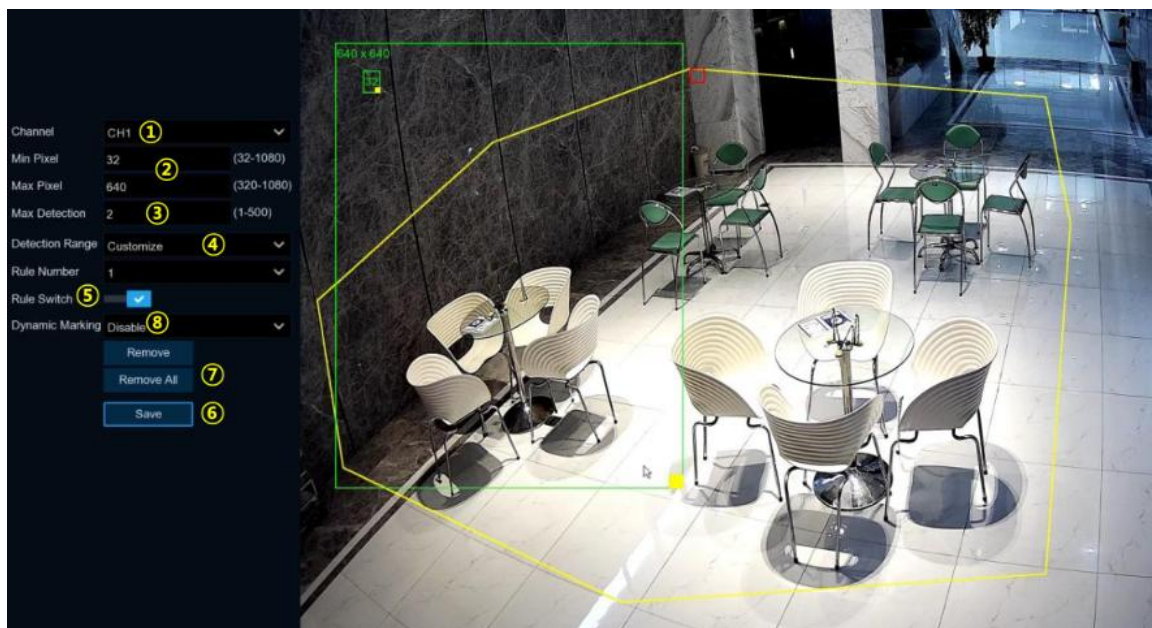

1. Select the channel you want to configure.
2. To set the minimum & maximum pixel of face size.
3. Set the maximum allowed number. When the total number of detected people in the selected area exceeds the pre-set allowed number, the system will send an alert.
4. You can choose "**Full Screen**", the entire view of the camera is enabled for face detection as the detection area. Or you can choose "**Customize**", and then use your mouse to click 8 points in the camera image to draw a virtual region.
5. To enable the detection in Rule Switch.
6. Click **Save** to save your settings.
7. If you want to remove the customized region, click **Remove All** directly.
8. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.

5.4.1.8. QD (Queue Length Detection)


Queue length detection is used to detect the status of a queue, including its length and staying time.

Setup	FD	PD & VD	PID	LCD	CC	HM	CD	QD	LPD	RSD	SOD	Sound Detection	Video Tampering	Schedule
Recognition														
Alarm														
Statistics														
Channel	Setup	Switch	Sensitivity											
CH1		Schedule	2											
CH3		☐	1											
CH5		☐	2											

Switch: To enable or disable the queue length detection function.

Sensitivity: Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.


Setup: Click settings to configure the detection condition:

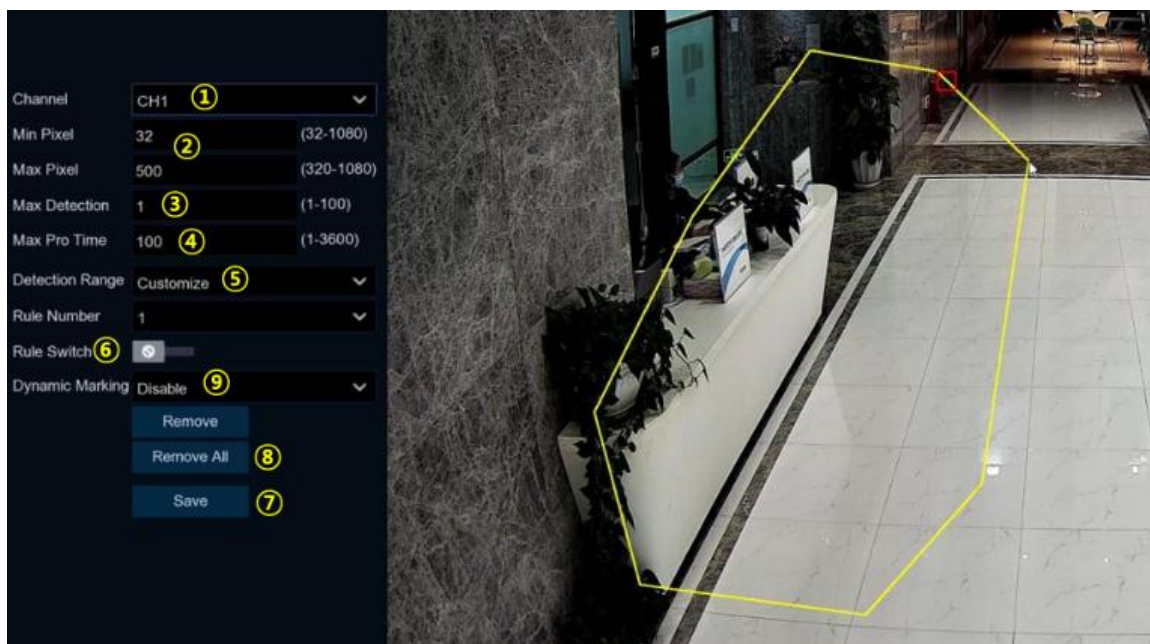

1. Select the channel you want to configure.
2. To set the minimum & maximum pixel of face size.
3. Set the maximum allowed number. When the total number of detected people in the line inside the detection area exceeds the pre-set allowed number, the system will send an alert.
4. Set the maximum staying time in seconds. The NVR will send an alert if the staying time of the queue is longer than the given staying time.
5. You can choose "**Full Screen**", the entire view of the camera is enabled for face detection as the detection area. Or you can choose "**Customize**", and then use your mouse to click 8 points in the camera image to draw a virtual region.
6. To enable the detection in Rule Switch.
7. Click **Save** to save your settings.
8. If you want to remove the customized region, click **Remove All** directly.
9. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.

5.4.1.9. LPD (License Plate Detection)

License Plate Detection function, also called "Automatic License/Number Plate Recognition (ANPR)", helps to detect and record the license plate number.

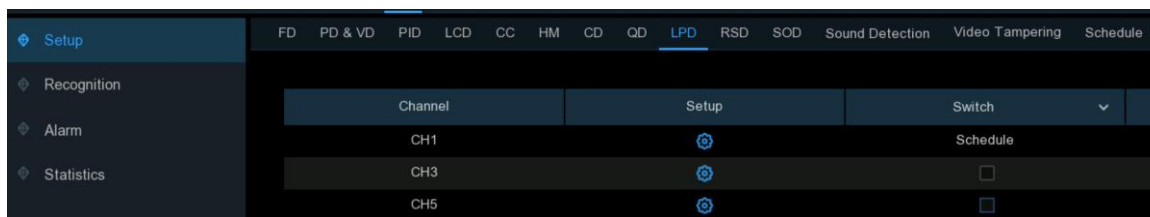

Switch: To enable or disable the crowd density detection function.

Setup: Click settings to configure the detection condition:



1. Choose a channel you want to set.

2. Select how snapshots containing a recognized license plate will be captured. This can affect the number of license recognition notifications that you will receive:

- **Default Mode:** a single, best snapshot of the license plate is captured.
- **Realtime Mode:** the camera tracks and captures the license plate of vehicle entering and leaving the detection area. You'll get two notifications in the Alarm Notification Panel - once when the license plate is first detected and again as the vehicle leaves the detection area. This is useful if you want to continuously monitor the vehicle's presence in an area and get alerts in real-time.
- **Interval Mode:** you can specify the number of snapshots to take and the time interval between snapshots.

Snap Num: the number of snapshots to take

Snap Frequency: the time interval between snapshots

3. To set the minimum & maximum pixel of size of license plate.

4. Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.

5. Choose one of the license plate types :

- European license plate: mainly used in European countries.
- American license plate: mainly used in United States.

6. Choose the detection mode:

- **Static Mode:** all vehicles' license plates in the camera's field of view will be analyzed.
- **Motion Mode:** only license plates of moving vehicles will be analyzed.

7. You can choose "**Full Screen**", the entire view of the camera is enabled as the detection area. Or you can choose "**Customize**", and then adjust the size of the detection region.

8. If you want the green tracking frame that surrounds a detected object to be invisible during live view mode and playback, then choose Disable in the **Dynamic Marking**.

9. **LPD Enhance:** Used to set whether to enable license plate detection enhancement.

Day Level: Used to set the day time level, which is applicable to day time scenarios. The larger the level value is, the brighter the image is. The lower the level value is, the darker the image is. The level value range is 0–255.

Night Level: Used to set the nighttime level, which is applicable to nighttime scenarios. The larger the level value is, the brighter the image is. The lower the level value is, the darker the image is. The level value range is 0–255. **Note: When the LPD function is enabled**, if LPD enhancement is also enabled, the image brightness of the camera can be adjusted in accordance with the configured level value. Meanwhile, the device automatically adjusts its day time level or nighttime level in accordance with whether the camera is enabled with IR mode. The two application scenarios are independent of each other. To use LPD enhancement, you need to set **Exposure Compensation** to **Disable** and set **Shutter** to **Auto** on the image control page. After LPD enhancement is enabled, **Time Exposure** cannot be modified.

5.4.1.10. RSD (Rare Sound Detection)

With the Rare Sound Detection function, it will alert you when your NVR detects abnormal sound, like baby crying, dog barking, and gunshot, and some certain actions can be taken when the alarm is triggered.

FD

PD & VD

PID

LCD

CC

HM

CD

QD

LPD

RSD

Schedule

Channel	Setup	Switch	
CH1		☐	
CH2		☐	


Switch: Tick the checkbox to enable the detection.

Setup: Click setting to configure the detection condition:

Channel: Select an available to configure.

Sensitivity: Adjust the sensitivity level. The higher the number, the more sensitive the detection will be.

Detection Type:

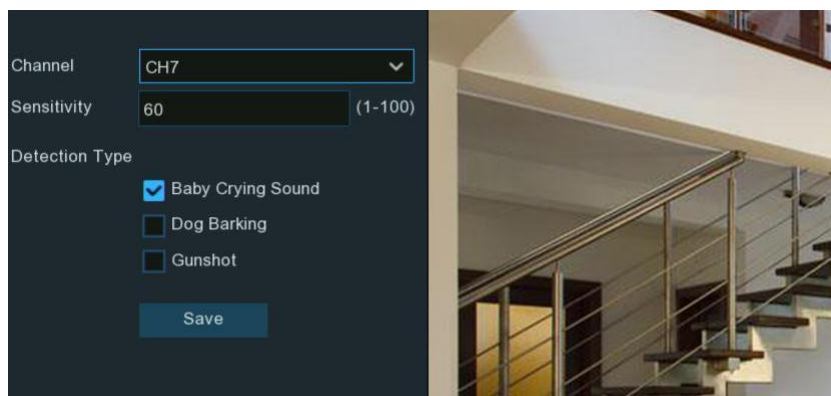

- **Baby Crying Sound:** Tick to enable baby crying detection.
- **Dog Barking:** Tick to enable dog barking detection.
- **Gunshot:** Tick to enable gunshot detection.

Click **Save** to save your settings.

5.4.1.11. SOD (Stationary Object Detection)


Stationary Object Detection function detects the objects left over or lost in the pre-defined region, such as the baggage, purse, dangerous materials, etc., and a series of actions can be taken when the alarm is triggered.

	FD	PD & VD	PID	LCD	CC	HM	CD	QD	LPD	RSD	SOD	Sound Detection	Video Tampering	Schedule
	Channel	Setup	Switch	Sensitivity										
	CH1		Schedule	2										
	CH2		☐	3										
	CH3		☐	3										
	CH5		☐	2										

Switch: Check the box to enable SOD function.

Sensitivity: Set the sensitivity level. Level 1 the lowest sensitivity level while level 4 is the highest sensitivity level.

Click **Setup** icon to draw a virtual region in the camera image.

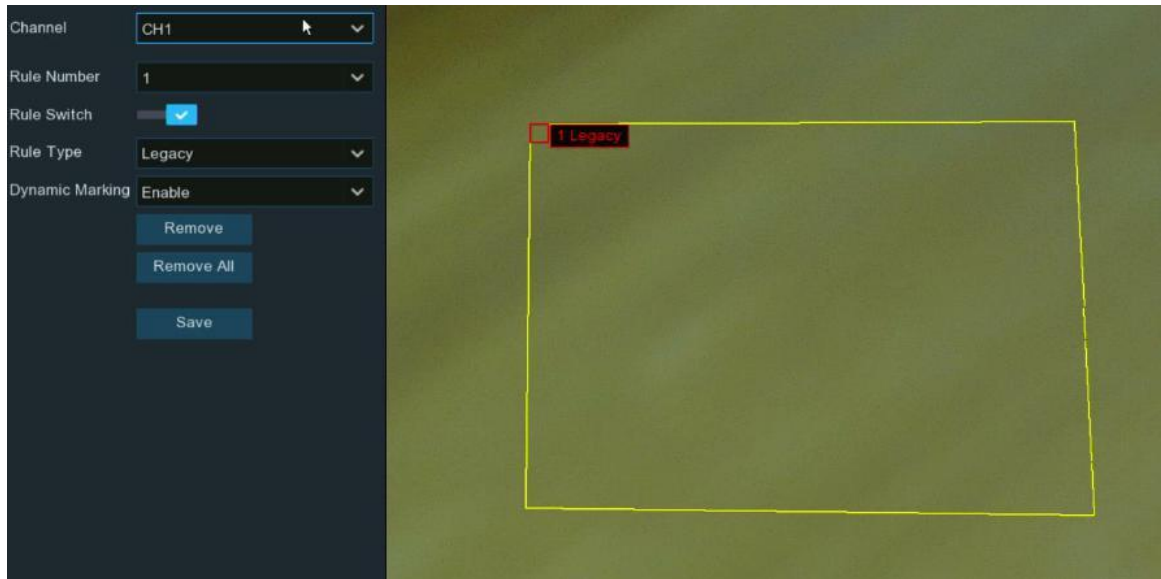


1. Choose one of the **Rule Number**. It is the number of SOD area. Maximum 4 areas you can set for SOD function.
2. To enable the detection in **Rule Switch**.
3. Choose a **Rule Type**.
 - **Legacy**: NVR will only detect the left-over objects;
 - **Lost**: NVR will only detect the lost objects;
 - **Legacy & Lost**: NVR will detect both left-over & lost objects.
4. Use your mouse to click 4 points in the camera image to draw a virtual region. The shape of the region should be a convex polygon. Concave polygon will be not able to save.
5. Click **Save** to save your settings.
6. If you want to adjust the size of the region, click the red box in the region, the borders of the region will be changed to red color. Long press the left button of your mouse to move the whole region, or drag the corners to resize the region.
7. If you want to remove one of the regions from the camera image, click the red box in the region and then click **Remove** button. Click **Remove All** will delete all regions.

Note: 1. The detection area shall be greater than or equal to the size of the detected object, such as the detection of a white bottle. 2. The detected object cannot be covered.

5.4.1.12. Sound Detection

With the sound detection, it will alert you when your NVR detects audio that matches or exceeds the set trigger level, and some certain actions can be taken when the alarm is triggered.

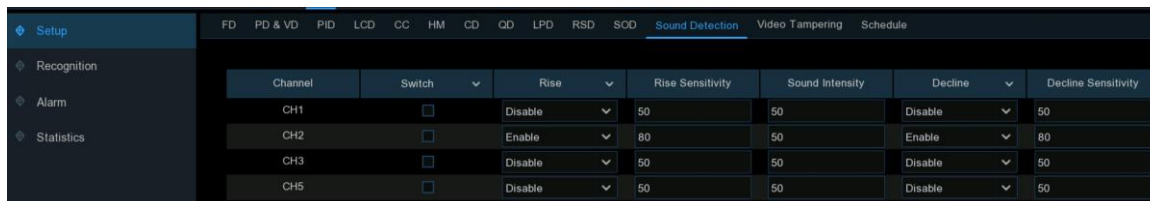

Channel	Switch	Rise	Rise Sensitivity	Sound Intensity	Decline	Decline Sensitivity
CH1	☐	Disable	50	50	Disable	50
CH2	☐	Enable	80	50	Enable	80
CH3	☐	Disable	50	50	Disable	50
CH5	☐	Disable	50	50	Disable	50

Switch: enable or disable sound detection.


Rise: enable or disable sound rise detection.

Rise Sensitivity: change the sensitivity level. The higher the number, the more sensitive your NVR will be when detecting sound.

Sound Intensity: Set a threshold of sound intensity, the lower value, the more sensitivity.

Decline: enable or disable sound Decline detection.


Decline Sensitivity: change the sensitivity level. The higher the number, the more sensitive your NVR will be when detecting sound.

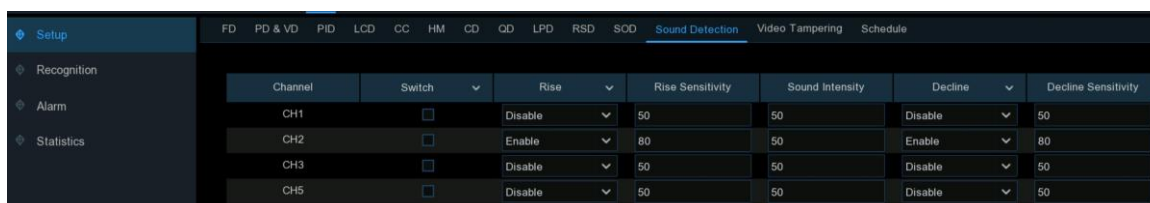

Channel	Switch	Rise	Rise Sensitivity	Sound Intensity	Decline	Decline Sensitivity
CH1	☐	Disable	50	50	Disable	50
CH2	☐	Enable	80	50	Enable	80
CH3	☐	Disable	50	50	Disable	50
CH5	☐	Disable	50	50	Disable	50

(Slide to the right to view more options)

Schedule: Each square represents 30 minutes. Using the mouse, click on a particular square to change or click and drag the mouse over the squares corresponding to your desired period. The sound detection will be activated if the time table is in blue color, oppositely the detection will be inactivated if the time table is in black color.

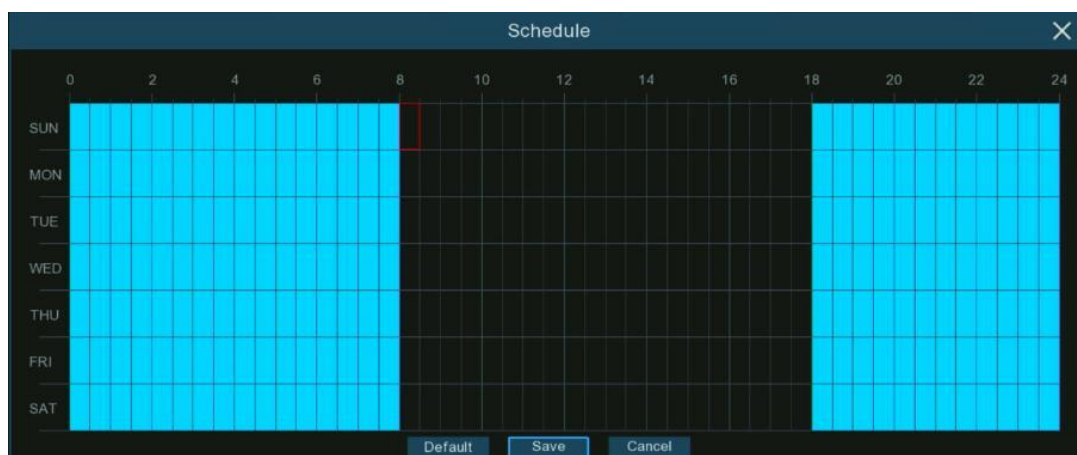

5.4.1.13. Video Tampering

Video Tampering detects the occlusion of camera images, and some certain actions can be taken when the alarm is triggered.



Switch: Enable or disable the function

Sensitivity: The sensitivity level is from 1 to 6, with a default value of 3. Higher sensitivity will be easier to trigger the detection.

5.4.1.14. Schedule

You can configure the recording schedule for AI detection functions. The interface might be different vary with different camera firmware:



Interface A

1. Choose the channel you want to set.
2. Click on the mode radio button to choose one of the detection functions
3. By default, the detection is activated by 24 hours / 7 days, however you can change this according to your needs.
4. Each square represents 30 minutes. Using the mouse, click on a particular square to change or click and drag the mouse over the squares corresponding to your desired period. Squares in green color are active for deterrence.
5. The set schedule is valid only for one channel. If you want to use the same schedule for other channels, use **Copy** function.
6. Click **"Save"** to save changes made.



Interface B


1. Choose a **Channel** you want to set.
2. Tick the Enable button to activate the AI recording schedule
3. Click on the mode radio button to choose one of the detection functions. The detection functions with red-colored radio button are mutually exclusive, one and only one of them can be activated at the same time.
4. Each square represents 30 minutes. Using the mouse, click on a particular square to change or click and drag the mouse over the squares corresponding to your desired period. Squares in green color are active for deterrence.
5. Block in grey color is occupied and unable to select. Block in black color is available to select.
6. Click **Apply** to save.

5.4.2. AI Recognition

With the face detection & license plate detection functions, the system supports to recognize faces and vehicle license, you would need to configure the recognition algorithm model and manage the database.

5.4.2.1. Model Configuration

To choose the face recognition AI algorithm model.

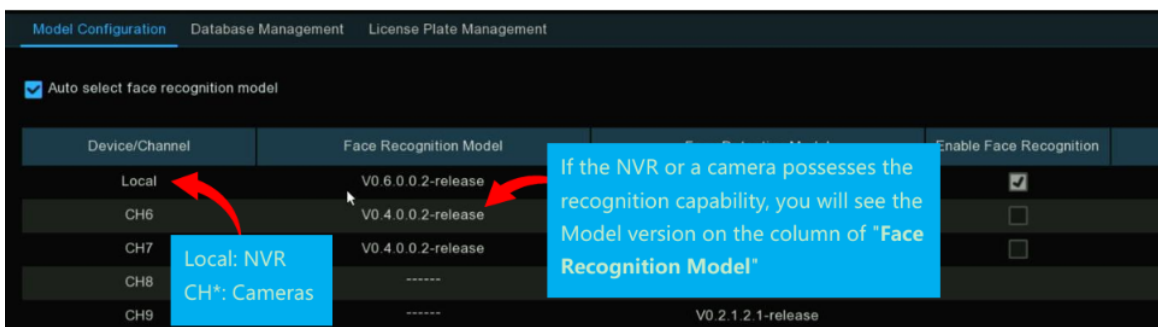


The face AI algorithm mainly includes two parts: Detection and Recognition.

- Detection is mostly used to detect and capture face images. Generally, the detection capability is possessed by IP cameras.
- Recognition is mostly used to extract, analyze and compare the face features. Recognition capability is possessed by the NVR and some of IP cameras. To fully implement the face detection and recognition function, the system will select a face recognition model automatically when you use the face AI function at the first time.

If you want to choose the model by manual, untick the checkbox of "**Auto select recognition model**", and then tick the checkbox of the model you want to enable.

Rules & advices for manual selection:

1. At least one face recognition algorithm model must be enabled, otherwise the face recognition function would malfunction.

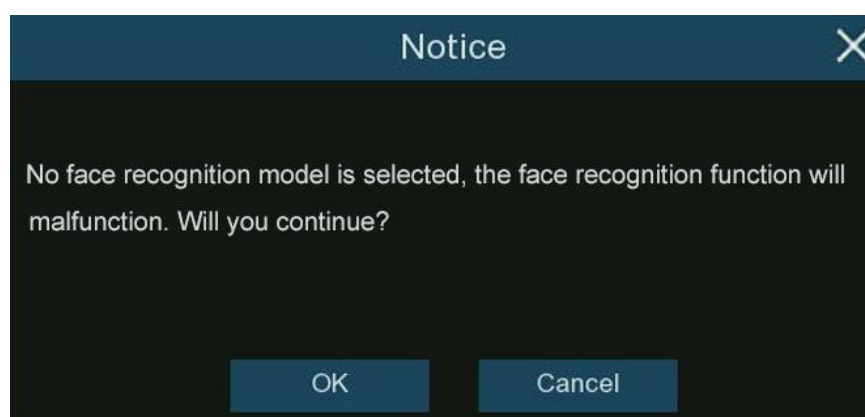


2. Between NVR and camera, you can only select either-or.
3. Models with across versions are disallowed to be select.
4. Newer version (with bigger digital sequence) is preferred to be selected due to its algorithm optimization and database update.
5. Multiplex models with same version are allowed & recommended to be enabled. This would help to decrease the analysis loading on a single NVR or camera and accelerate the recognition.

Device/Channel	Face Recognition Model	Face Detection Model	Enable Face Recognition
Local	V0.6.0.0.2-release	-----	☐
CH1	V0.4.0.0.2-release	V0.4.1.6.1-release	☒
CH2	V0.2.0.5.1-beta	V0.2.1.2.1-release	☐
CH3	V0.3.0.0.1-release	V0.3.1.2.1-release	☐
CH6	V0.4.0.0.2-release	V0.4.1.6.1-release	☒
CH7	V0.4.0.0.2-release	V0.4.1.6.1-release	☒
CH8	-----	V0.4.1.6.1-release	☐
CH9	-----	V0.2.1.2.1-release	☐
CH12	V0.4.0.0.2-release	V0.4.1.6.1-release	☒


Multiplex models with same version are allowed to be enabled.

If one or more selected cameras (not all) are off-line, the recognition mission will be automatically assigned to the rest of selected camera(s).


6. When the Model is enabled on a single camera and if the camera is off-line, the face recognition will stop working. System will send an alert notification shown as below. Click "**OK**" to let the system automatically select a new model. If you click "**Cancel**", you would need to configure the recognition model by manual later.

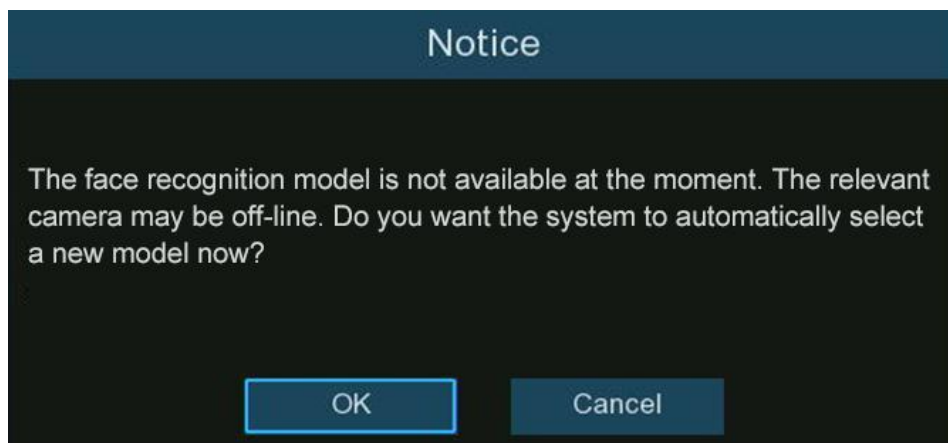

7. If you want to change the model to a different version, the system would send you a notice, click "**OK**" to continue. 7.

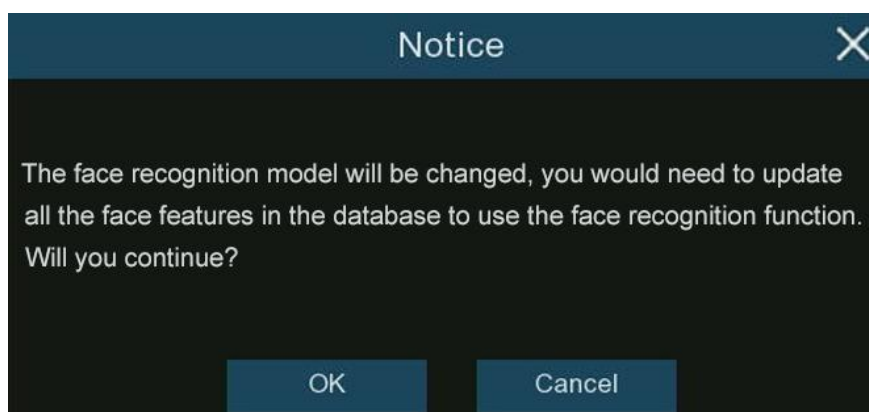

If the recognition model has been changed to a different version, the system would send you a notice, click "**OK**" to continue. If 8. you click "**Cancel**", you would need to go to "**Database Management**" menu and then click "**Update facial features**" button to update the database.

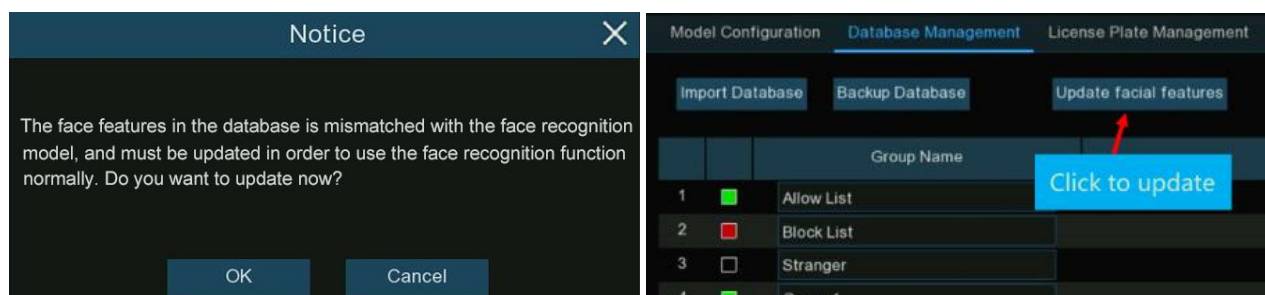

5.4.2.2. Face Recognition Database Management

You're able to create and manage the face profiles (database) to classify different people into different groups in order to quickly identify people in remote and realize intelligent alarm beforehand.



There are 3 default groups:

- **Allow List:** Mostly used to define a list of people that are regarded as acceptable or trustworthy, such as family members, colleagues, frequent customers, etc.
- **Block List:** Mostly used to define a list of people that are regarded as unacceptable or untrustworthy and should be excluded or avoided.
- **Stranger:** All ungrouped people will be identified as stranger. You can click add button to create or click delete button to delete customized group. If you want to make a backup of your database, use the **Backup Database** function to export it to your USB flash drive. The exported database can be imported to the same or another NVR by using **Import Database** function (Please note, this will overwrite the existing settings and face profiles.).

Tick the checkbox of **Enable** to enable the group. You would need to create face profiles (add face images) to the groups in order to sufficiently exert the identification effects.


5.4.2.2.1. Create Face Profiles from Local Storage Device

This section will show how to create face profiles from face images that have been captured and stored on your NVR.


1. Click the **"Edit"** button of the group that you would like to create face profiles for.



2. From the Group window, click the **"Import"** button, then click the **"Local Storage Device"** button.

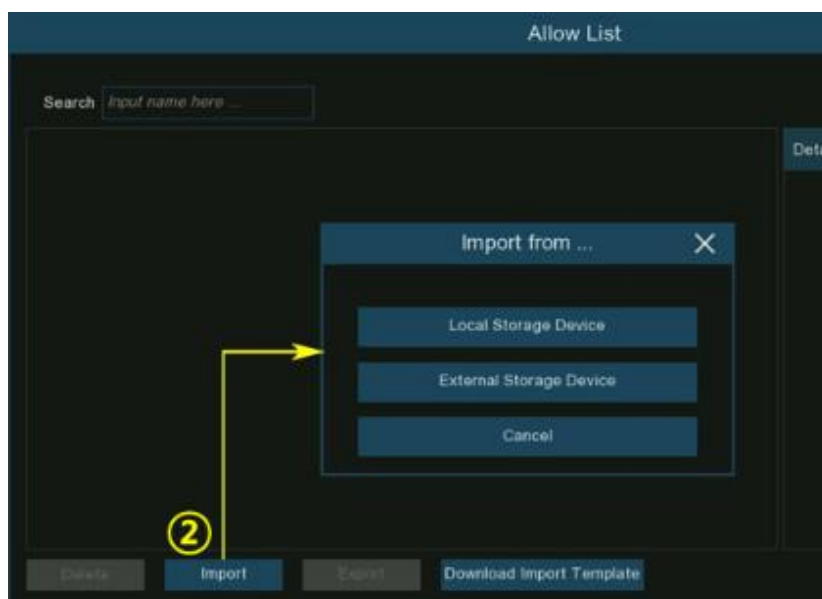

Channels: All channels are set to search by default. You can specify the cameras you want to search on. 3.

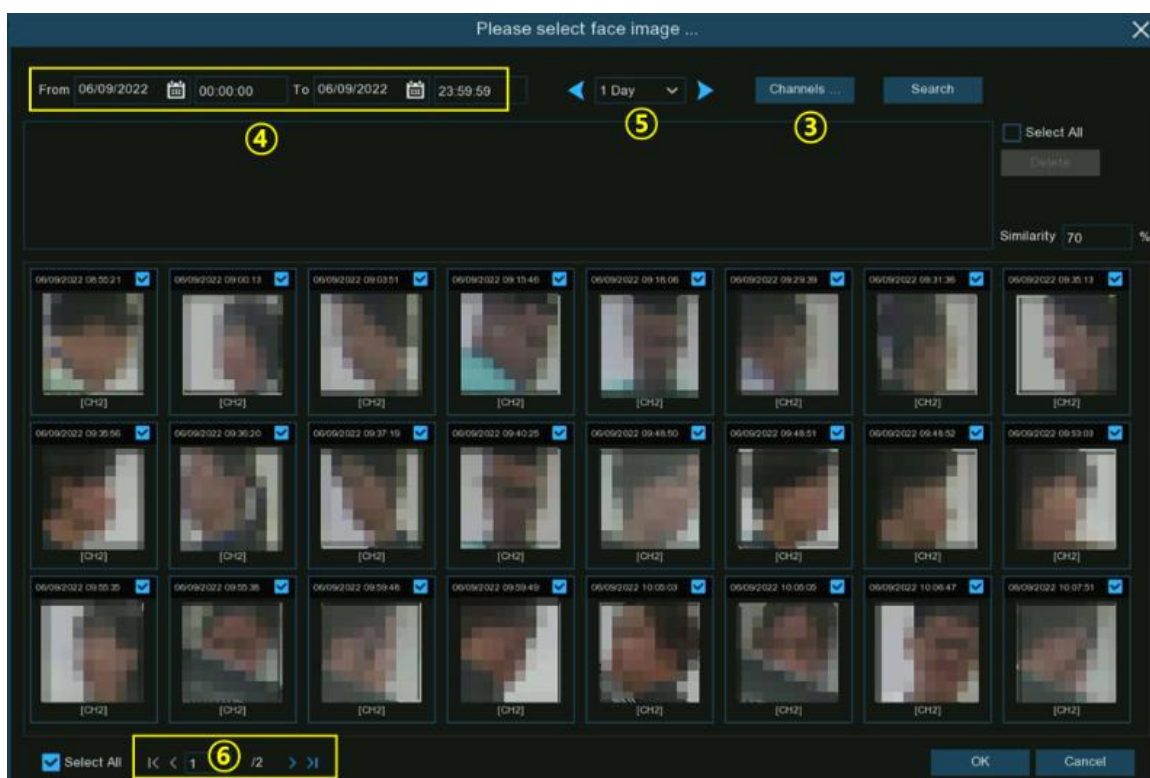


4. Use the calendar to specify the date range.

5. Choose the day duration, and then use the arrow buttons to quickly display face images from the previous or next day(s).

6. The search result will be displayed in the face list automatically. Use the arrow buttons to display previous or next page of results.


7. You can narrow the search result by using the similarity:

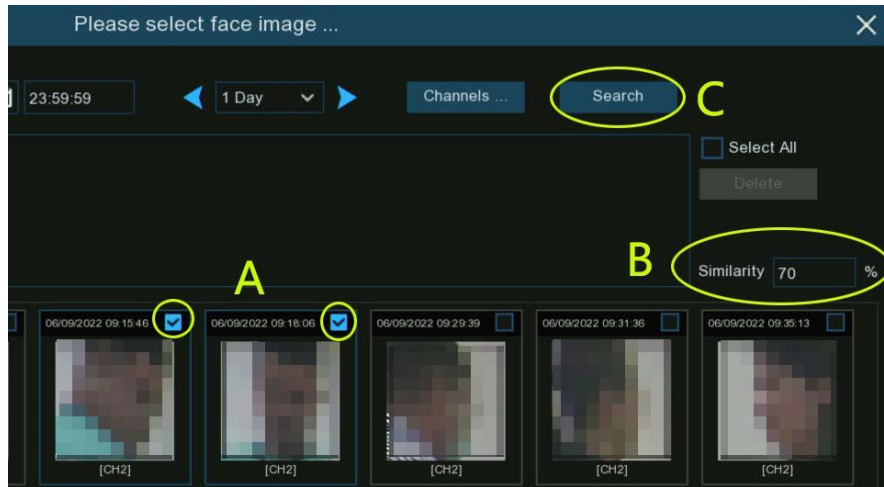

A. First, select the targeted face image(s) from the search result.

B. And then set the **Similarity** value. It is the face similarity threshold (%). The higher the number is, the more precise the result will be.


C. Click **Search** button, the system will search for faces with an equal or greater similarity than the specified value.

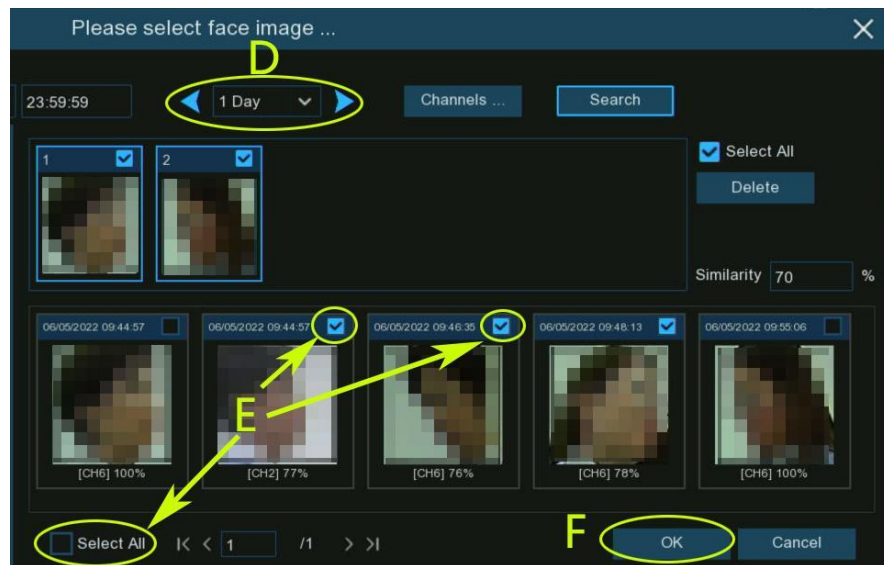

D. If you want to search from other days, choose the day duration, and then use the arrow buttons to quickly display face images from the previous or next day(s).

E. Tick the checkbox to select individual face image, or tick "**Select All**" to select all face images in current page of search result.

F. Once you've selected one or more face images, click the "**OK**" button. The system will go to profile edit page.

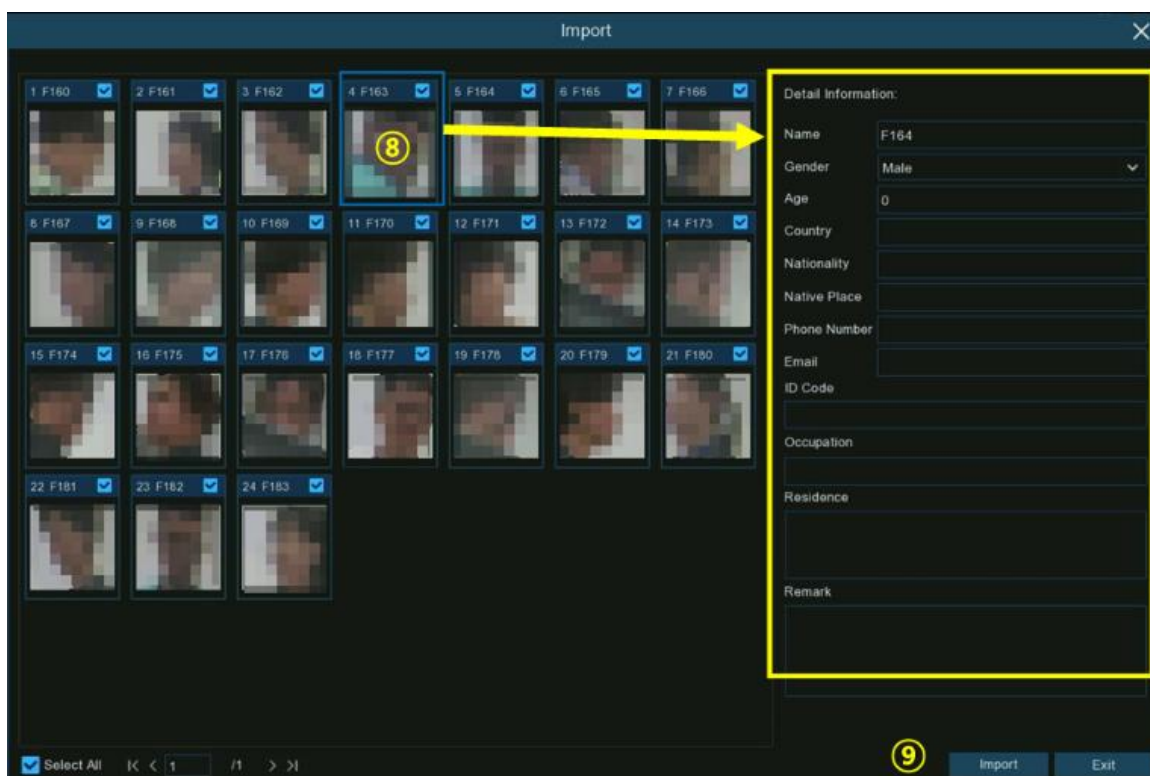

8. Click on a face image, then enter their identification details, such as the person's name and age. By default, each face image is given a face ID as its name.

9. When finished, click "**Import**" button. The face profile is now created and assigned to the group.

5.4.2.2.2. Create Individual Face Profile from External Storage Device


1. Copy the face images to your USB flash drive, and then insert the USB device into the USB port of the NVR. Note: the supported formats of face image are ".jpg", ".jpeg", ".png", and ".bmp". The supported dimension of the image is from 80x80 to 800x800 pixels, and the maximum supported size is 500KB.

Name	Type	Size	Dimensions
 Anna.jpeg ✓	JPEG File	32 KB	700 x 720
 Jack.jpeg ✓	JPEG File	88 KB	800 x 683
 David.jpg ✗	JPG File	168 KB	800 x 891
 Jenny.jpeg ✗	JPEG File	82 KB	1000 x 1000
 Selina.jpg ✗	JPG File	626 KB	800 x 683
 Victoria.jpg ✗	JPG File	4,371 KB	6000 x 4000


2. Click the "**Edit**" button of the group that you would like to create face profiles for.



3. From the Group window, click the "Import" button, then click the "External Storage Device" button.

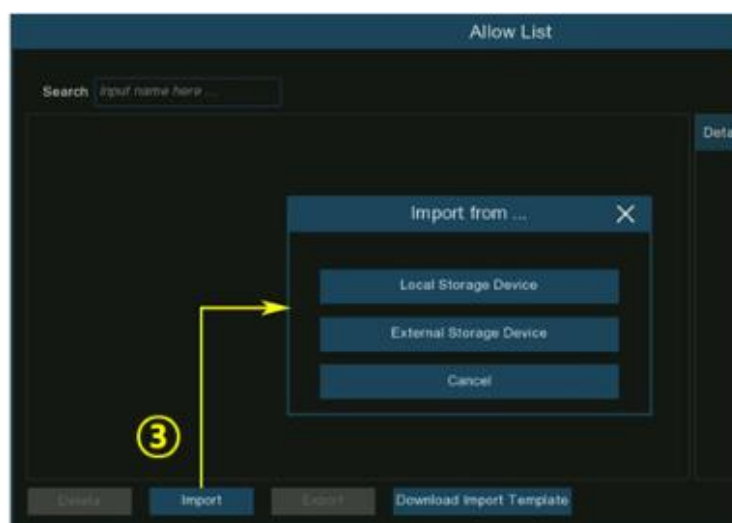


4. Click on the face image you want to import, and then click **OK** button.

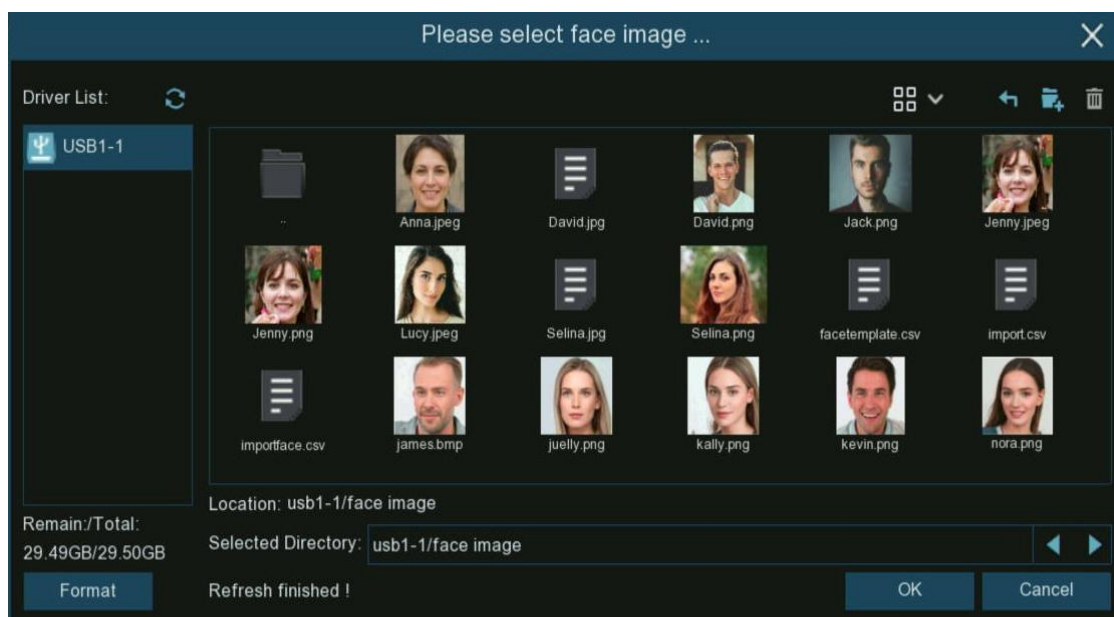

5. Edit the face profile of the people.

6. Click setup button to configure the voice prompt for the person. View more on **5.3.9. Voice Prompts** to learn how to configure this function.

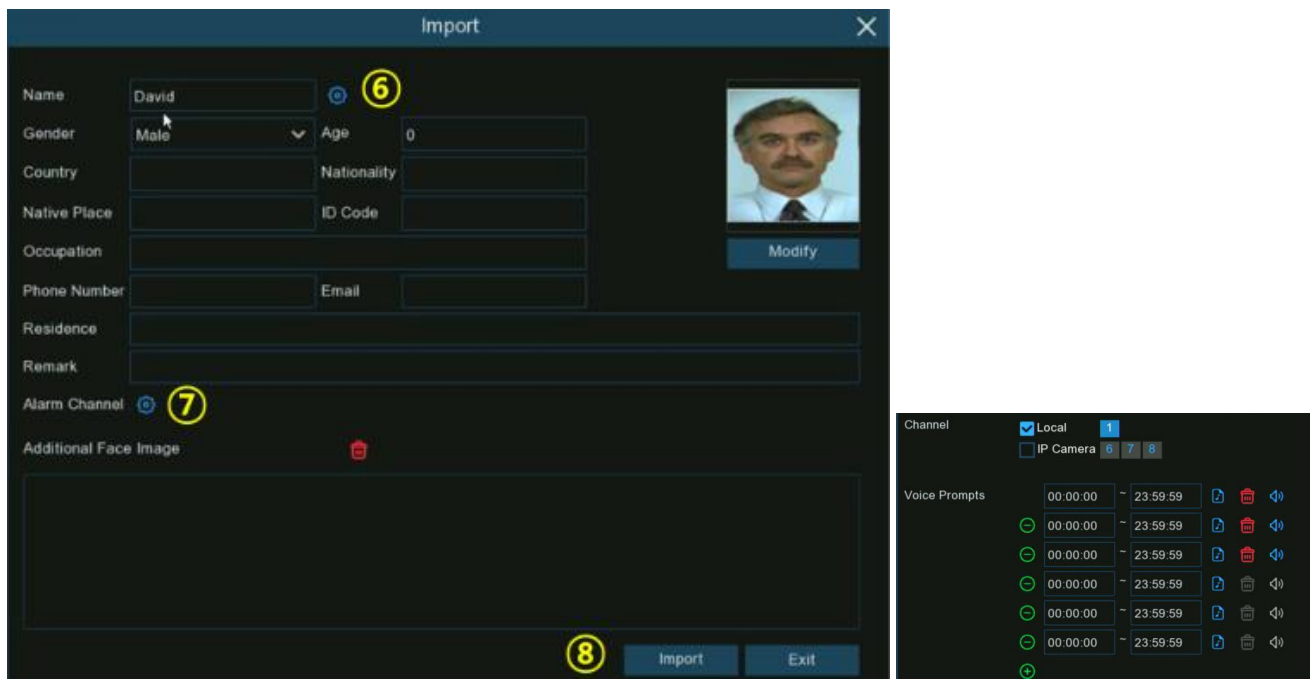


Note: the voice file you import here takes effect only to this person. If you had set several periods of time, you would need to import voice file for each period. to configure the **Alarm Channel**. The system will alert when the face is detected and captured by the

7. Click setup button selected cameras.

8. Click **Import** button to import the face profile.


9. Now you will see an add button displayed in the Additional Face Image window. You are able to add additional face images at different angles for the same person to improve face recognition accuracy:

Click the add button, to add images from local and/or external storage device. Maximum 10 images allowed to add.

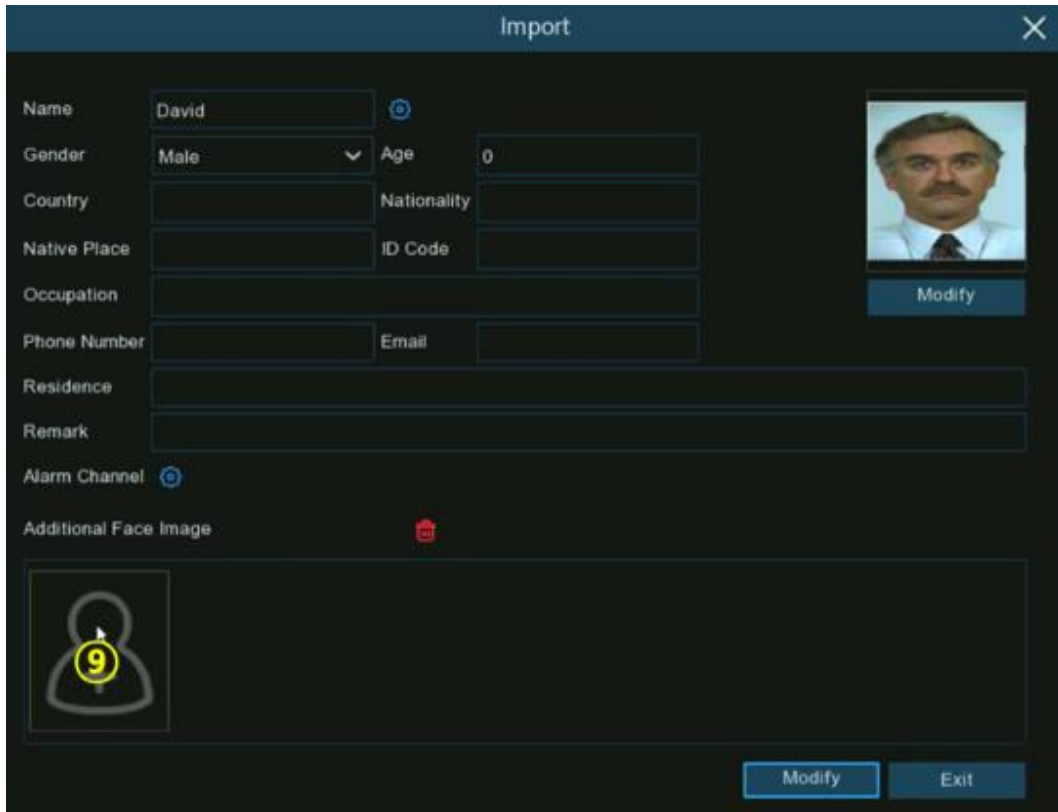

The 'Import' window contains the following fields and controls:

- Name:** Text input with 'David' and a search icon.
- Gender:** Dropdown menu with 'Male' selected.
- Age:** Text input with '0'.
- Country:** Text input.
- Nationality:** Text input.
- Native Place:** Text input.
- ID Code:** Text input.
- Occupation:** Text input.
- Phone Number:** Text input.
- Email:** Text input.
- Residence:** Text input.
- Remark:** Text input.
- Alarm Channel:** Text input with a search icon.
- Additional Face Image:** Section with a red trash icon and a large image placeholder showing a person icon with a yellow circle and the number '9'.
- Buttons:** 'Modify' (top right), 'Modify' (bottom right), and 'Exit' (bottom right).

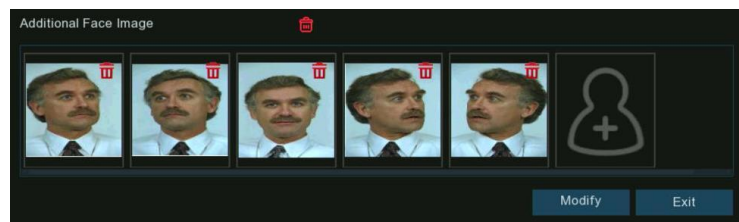

Click delete button to delete select image.

Click **Modify** button to finish, then click **Exit** button or right click your mouse to exit.


5.4.2.2.3. Create Bulk Face Profiles from External Storage Device

If you want to create a batch of face profiles at once, please proceed as below:


1. Click the "**Edit**" button of the group that you would like to create face profiles for.



2. From the Group window, you will find the " **Download Import Template** " button.

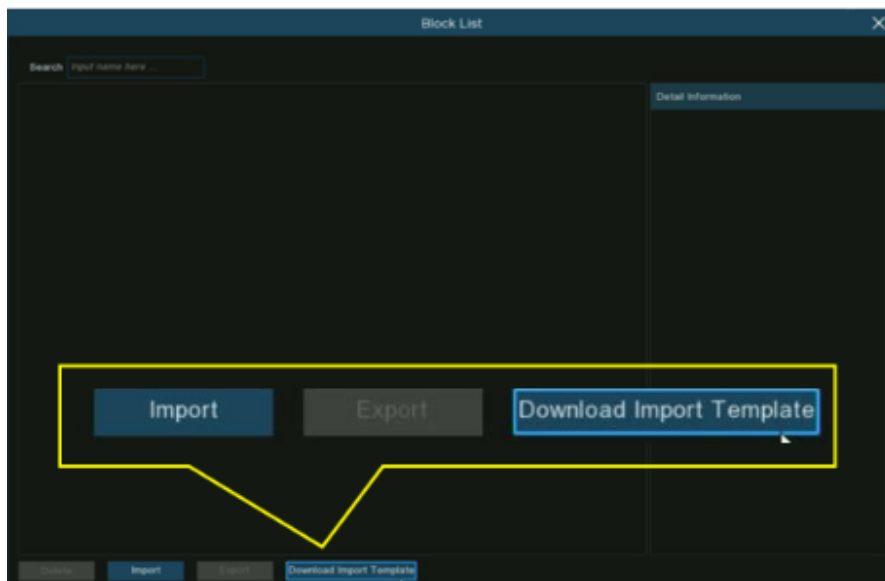

3. Insert your USB flash drive, and then click the **Download Import Template** button, a zip file named "import_template_enu.zip" will be downloaded into your USB flash drive.
4. Unzip the file, you will get 2 files shown as left.
5. Create a new folder, and give a name to it.

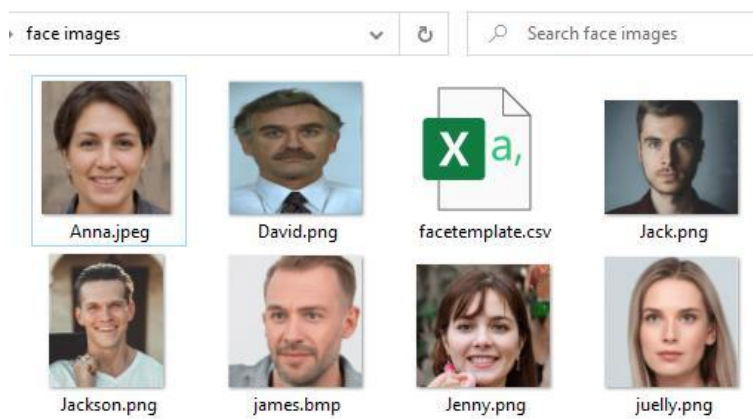

6. Copy the "facetemplate.csv" file and the face images into the folder. Make sure the formats of face image are ".jpg", ".jpeg", ".png", or ".bmp", the dimension is between 80x80 and 800x800 pixels, and the size is no more than 500KB.
7. Double click on the "facetemplate.csv" file to run it with excel. The content is shown as below:

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
name	gender	age	image pat	country	nation	nativepos	idcode	occupaito	phone	email	domicile	remark			
xxxx	male	30	face/imp	China	Han natio	ZhuHai	20200903	zhuhai	1.46E+15	12348545	zhuhai	bukeyishuruzhongwen,bixuyongutf8			

- **Column A:** Name of the person
- **Column B:** Gender of the person
- **Column C:** Age of the person

- **Column D:** Complete filename of the image, for example "David.png".
- **Column E:** Name of country/region where the person comes from.
- **Column F:** Race of the person
- **Column G:** Native place of the person
- **Column H:** ID number of the person
- **Column I:** Occupation/Job/Career of the person
- **Column J:** Phone number of the person
- **Column K:** Email address of the person
- **Column L:** Residence address of the person
- **Column M:** Remarks column

8. Edit the cells according to your actual conditions as illustrated as below:

name	gender	age	image path	country	nation	nativepos	idcode	occupaiton	phone	email	domicile	remark
Anna Joyce	Female	30	Anna.jpeg	UK	English	England	123456789	Professor	07-123 456 789	test@xxxxxx.com	No. xx, Downing Street, London	Test
Nora Martins	Female	30	nora.png	UK	English	England	123456790	Professor	07-123 456 790	test@xxxxxx.com	No. xx, Downing Street, London	Test
Shelly Clinton	Female	30	shelly.jpeg	UK	English	England	123456791	Editor	07-123 456 791	test@xxxxxx.com	No. xx, Downing Street, London	Test
Sinna Donald	Female	30	sinna.png	UK	English	England	123456792	Photographer	07-123 456 792	test@xxxxxx.com	No. xx, Downing Street, London	Test
James Timothy	Male	30	james.bmp	UK	English	England	123456793	Director	07-123 456 793	test@xxxxxx.com	No. xx, Downing Street, London	Test
Juelly Smith	Female	30	juelly.png	UK	English	England	123456794	Cashier	07-123 456 794	test@xxxxxx.com	No. xx, Downing Street, London	Test
Kally Jones	Female	30	kally.png	UK	English	England	123456795	Reporter	07-123 456 795	test@xxxxxx.com	No. xx, Downing Street, London	Test
Kevin Williams	Male	30	kevin.png	UK	English	England	123456796	Manager	07-123 456 796	test@xxxxxx.com	No. xx, Downing Street, London	Test
Jenny Brown	Female	30	jenny.png	UK	English	England	123456797	Guide	07-123 456 797	test@xxxxxx.com	No. xx, Downing Street, London	Test
Lucy Taylor	Female	30	Lucy.jpeg	UK	English	England	123456798	Operator	07-123 456 798	test@xxxxxx.com	No. xx, Downing Street, London	Test
David Wilson	Male	30	David.png	UK	English	England	123456799	Scientist	07-123 456 799	test@xxxxxx.com	No. xx, Downing Street, London	Test
Jack Davis	Male	30	Jack.png	UK	English	England	123456800	Professor	07-123 456 800	test@xxxxxx.com	No. xx, Downing Street, London	Test
Selina Johnson	Female	30	Selina.png	UK	English	England	123456801	Composer	07-123 456 801	test@xxxxxx.com	No. xx, Downing Street, London	Test

Please Note: if you input a number uninterruptedly more than 11 digits in a cell, the system will display the number in scientific notation, e.g., "1.23457E+11". If so, you would need to adjust the format of the column to be "Text":

Select the column (especially the column of ID code and phone number) and then click right button of your mouse. Click "Format Cells..." on the pop-up menu.

Choose "Text", and then click "OK" button.

phone
1.45758E+15

NG

phone
014575767676

Good

Format Cells

Category: General, Number, Currency, Accounting, Date, Time, Percentage, Fraction, Scientific, **Text**, Special, Custom

Sample: remark

Text format cells are treated as text even when a number is in the cell. The cell is displayed exactly as entered.

OK Cancel

9. Save the .csv file. Make sure the file is saved as CSV UTF-8 type.


10. Copy the whole folder, including the face images and the "facetemplate.csv", and paste it to your USB flash drive.

11. Insert the USB flash drive into the USB port of your NVR.

12. Click the "Edit" button of the group that you would like to create face profiles for.




13. From the Group window, click the "Import" button, then click the "External Storage Device" button.

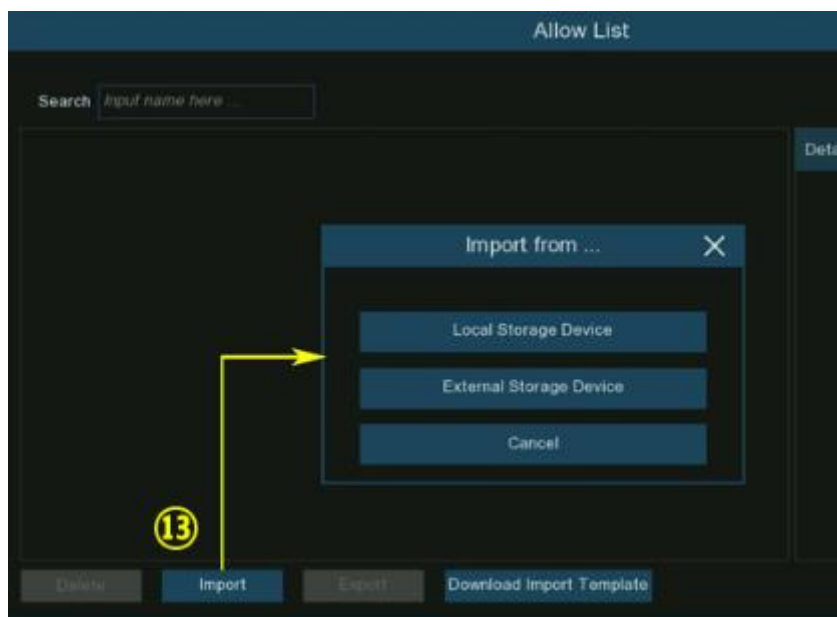

14. Find out and click on the "facetemplate.csv" file from your USB flash drive, and then click OK.





15. The face profiles are shown here. Click **Import** button to import the face profiles into the NVR.

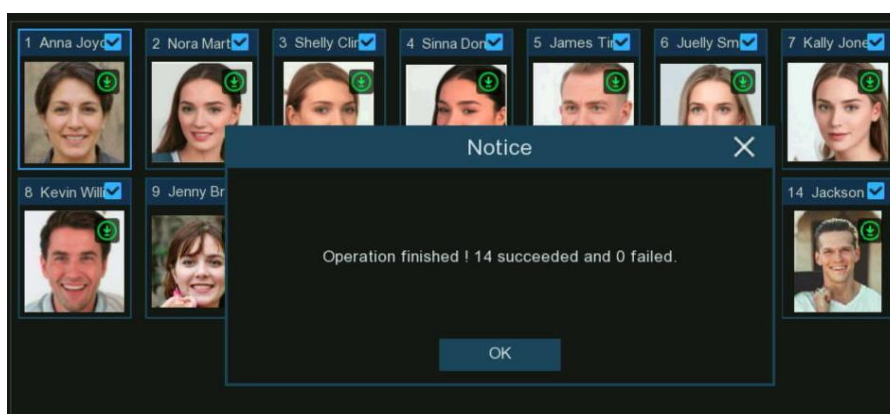

5.4.2.2.4. Edit Face Profiles


If you want to edit or delete a face profile, please proceed as below: 1. Click on the edit button of the group you want to edit 2. In the group edit page, you're able to execute below operations:

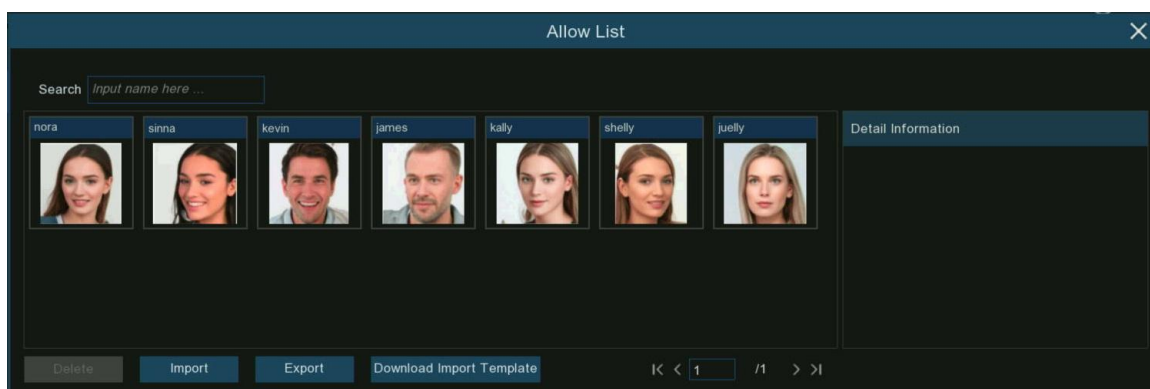

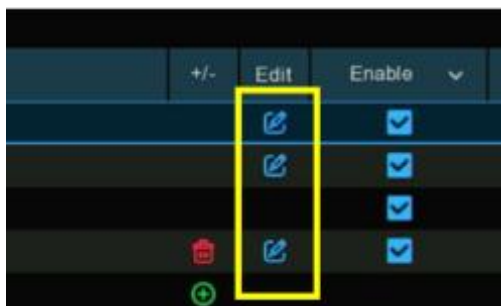

- **Import:** To import face images. View on **5.4.2.2.1. Create Face Profiles.**
- **Export:** To export face image(s) to external USB flash drive.
 - Click **Export** button directly to export all face images in this group.
 - Click on one of the face images, and then click **Export** button to export an individual image.
 - Click and hold the left button of your mouse, then drag the cursor to select multiple images, and then click **Export** button to export the selected images.


3. Move the mouse cursor upon the image you want to edit and then click left button of your mouse to select it. Click right button of your mouse to display a pop-up menu.

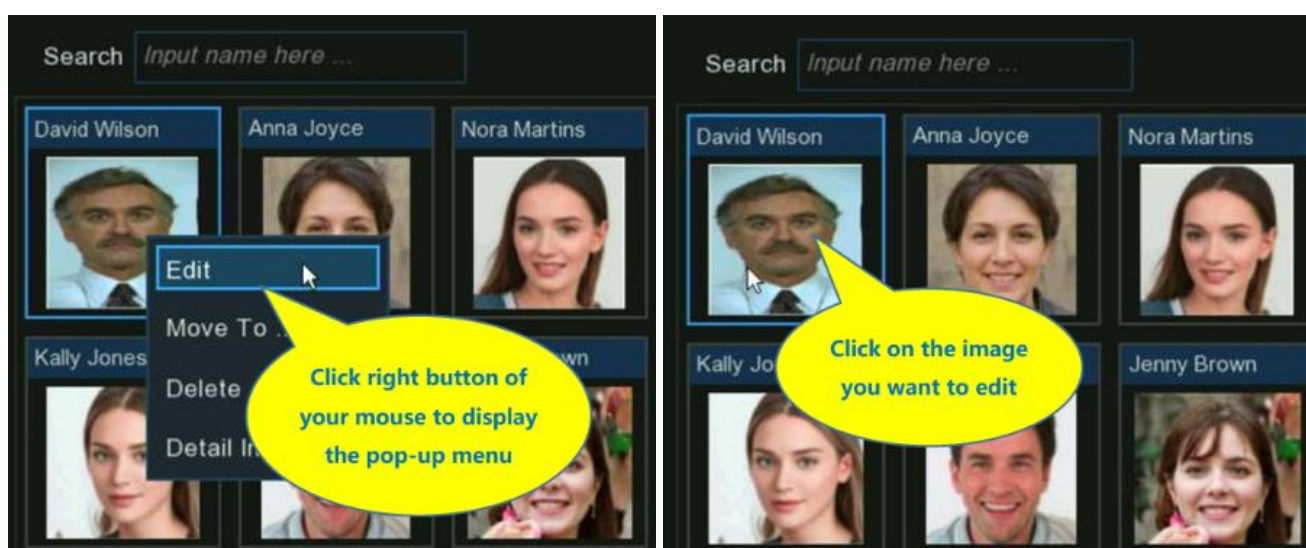


4. With the pop-up menu, you're able to:

- **Edit:** Click to edit the face profile. Check how to edit the profile on **5.4.2.2.2. Create Individual Face Profile from External Storage Device.**
- **Move To:** Click to move the face to another group.

Choose the targeted group, and then click OK.

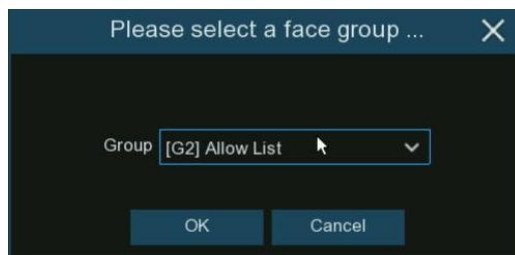


- **Delete:** To delete the select face profile.
- **Detail Information:** Click to view the details of the selected face profile.

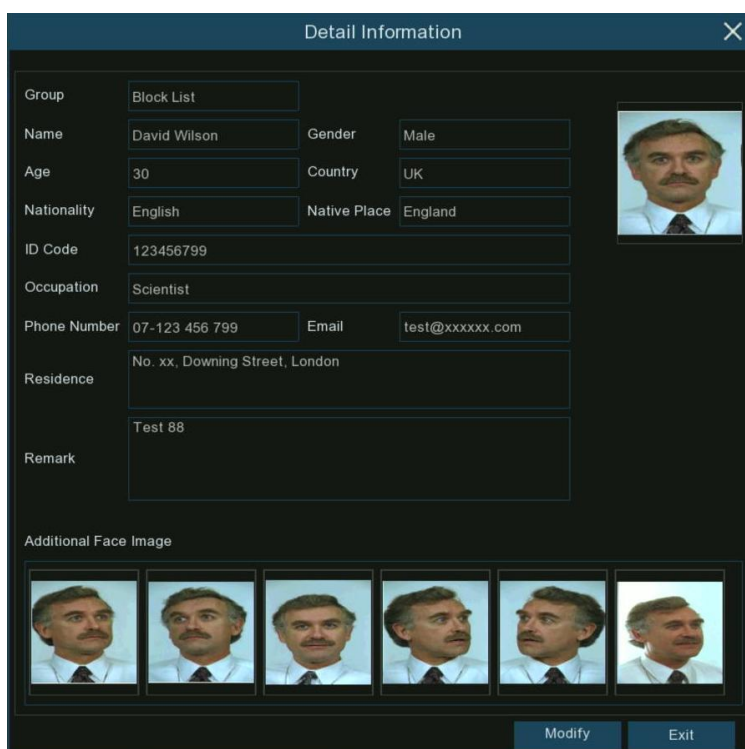

5.4.2.3. License Plate Management

You're able to create and manage the vehicle license profile (database) to classify different vehicles into different groups in order to quickly identify vehicles in remote and realize intelligent alarm beforehand.

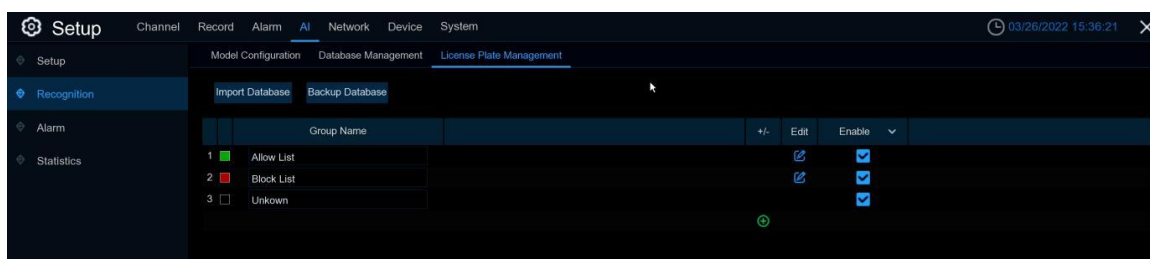

There are 3 default groups:

- **Allow List:** Mostly used to define a list of vehicles that are regarded as acceptable or trustworthy.

- **Block List:** Mostly used to define a list of vehicles that are regarded as unacceptable or untrustworthy and should be excluded or avoided.
- **Unknown:** All ungrouped vehicles will be identified as unknown vehicles.

You can click add button to create or click delete button to delete customized group. If you want to make a backup of your database, use the **Backup Database** function to export it to your USB flash drive. The exported database can be imported to the same or another NVR by using **Import Database** function. Tick the checkbox of **Enable** to enable the group. You would need to create vehicle license profiles (add license number) to the groups in order to sufficiently exert the identification effects.

Note: The maximum number to create vehicle license profiles in each group is 5,000.


5.4.2.3.1. Create License Profiles from Local Storage Device

This section will show how to create vehicle profiles from license plate images that have been captured and stored on your NVR.


1. Click the "Edit" button of the group that you would like to create vehicle license profiles for.



2. Click the "Import from Local" button.

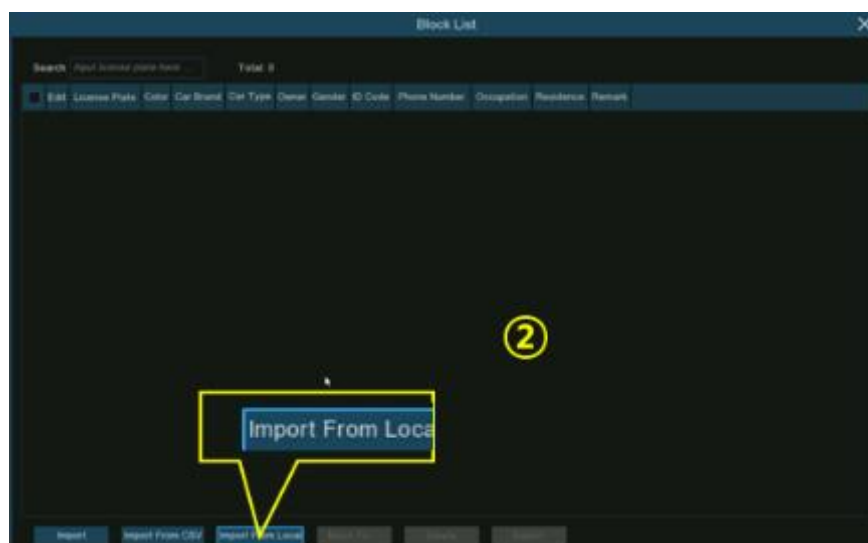

3. **Channels:** All channels are set to search by default. You can specify the cameras you want to search on.

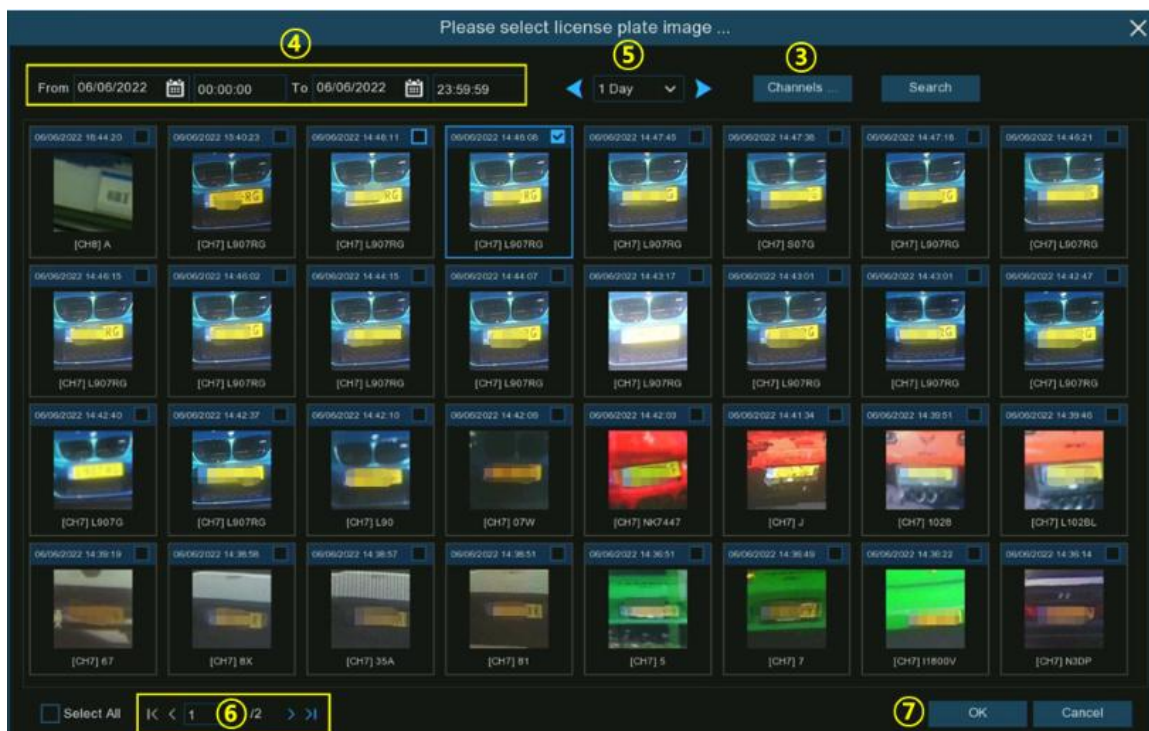

4. Use the calendar to specify the date range.


5. Choose the day duration, and then use the arrow buttons to quickly display license plate images from the previous or next day(s).

6. The search result will be displayed in the face list automatically. Use the arrow buttons to display previous or next page of results.

7. Tick the checkbox on the top right corner of the image to select the license plate images that you want to import, and then click OK button.

8. Now you will see a list of license number. Click on one of the license numbers, the detailed information will be list on the right side. You're able to edit the information, including license number, color, brand, model of the vehicle, and the owner's profile.

Click **Import** button after finishing the information input, the selected license numbers have been added.

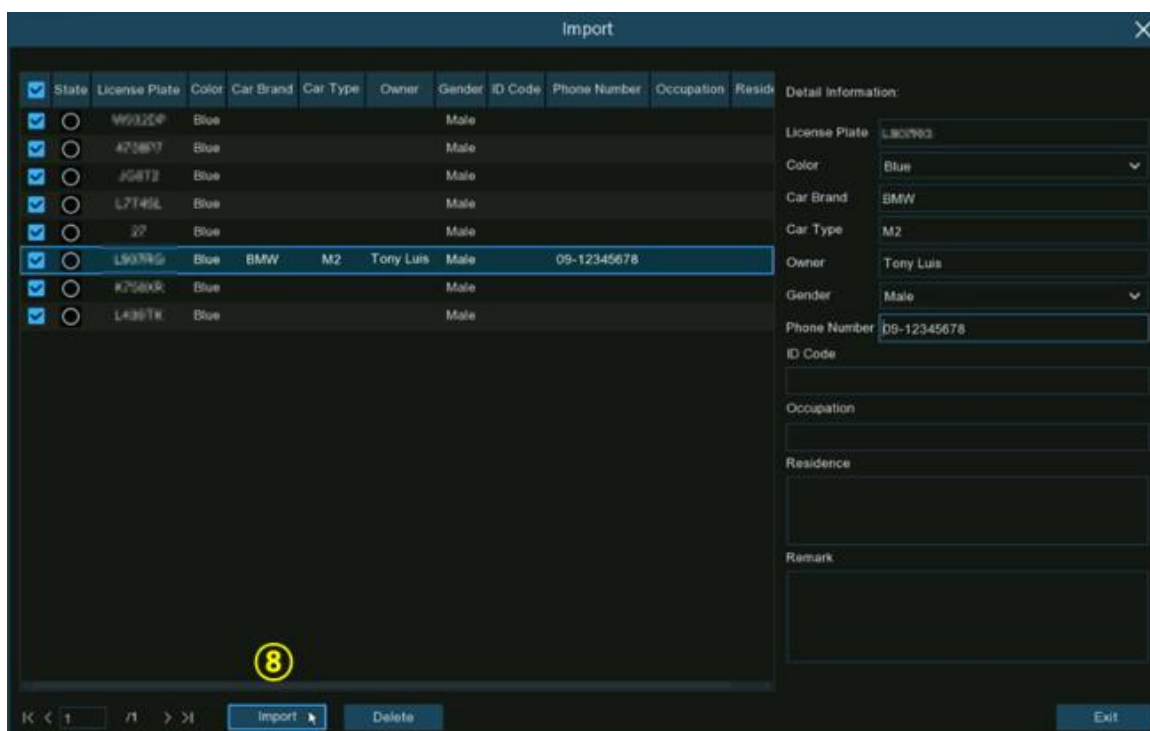


5.4.2.3.2. Create License Profiles by Manual

This section will show how to create vehicle by manual.

1. Click the "**Edit**" button of the group that you would like to create vehicle license profiles for.



2. Click the "**Import**" button.
3. Edit the license profile, including number, color, brand, model/type of the vehicle, and the owner's information.

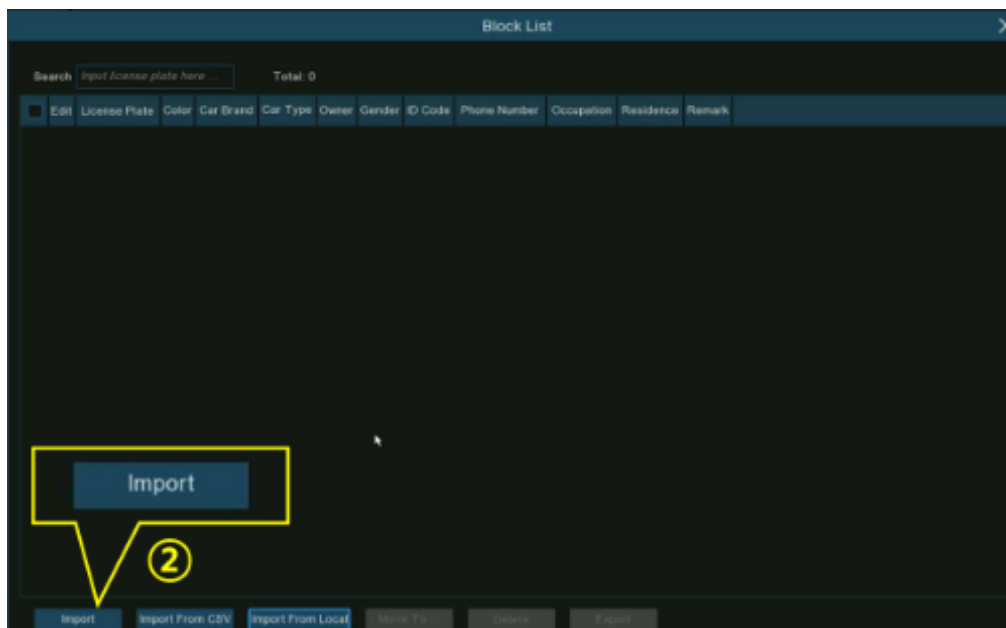


4. Click setup button to configure the voice prompt for the person. View more on **5.3.9. Voice Prompts** to learn how to configure this function.

Note: the voice file you import here takes effect only to this period. If you had set several periods of time, you would need to import voice file for each period.

5. Click setup button to configure the Alarm Channel. The system will alert when the license plate is detected and captured by the selected cameras.

6. Click **Import** button after finishing the information input, click **Exit** to finish.

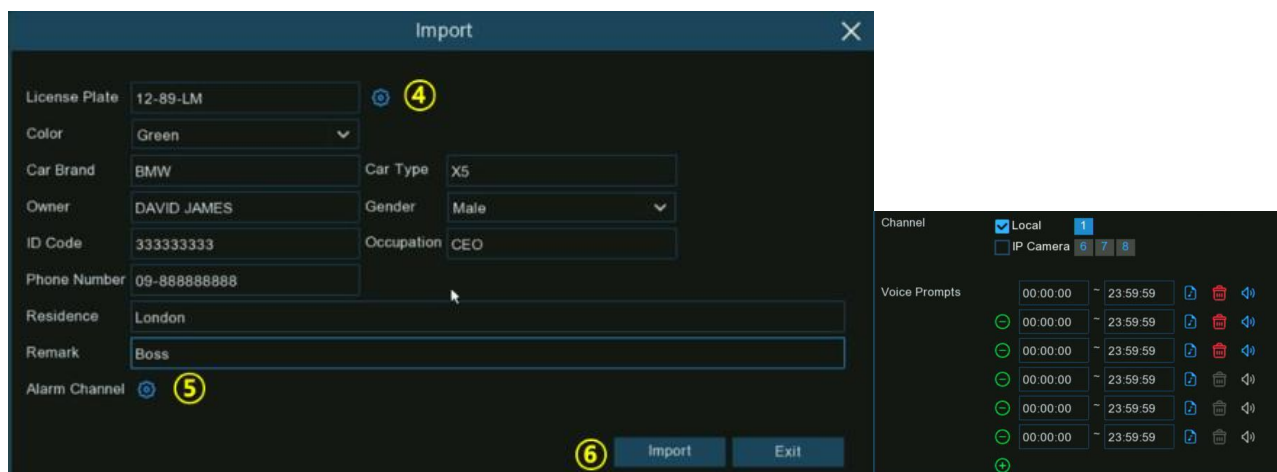

5.4.2.3.3. Create Bulk License Profiles


If you want to create a batch of license profiles at once, please proceed as below:

1. Insert your USB flash drive into the USB port of the NVR.


Click the "**Edit**" button of any one of groups where there is at least one vehicle license profile exists.




3. From the Group window, select at least one of the license profiles, and then click **Export** button.

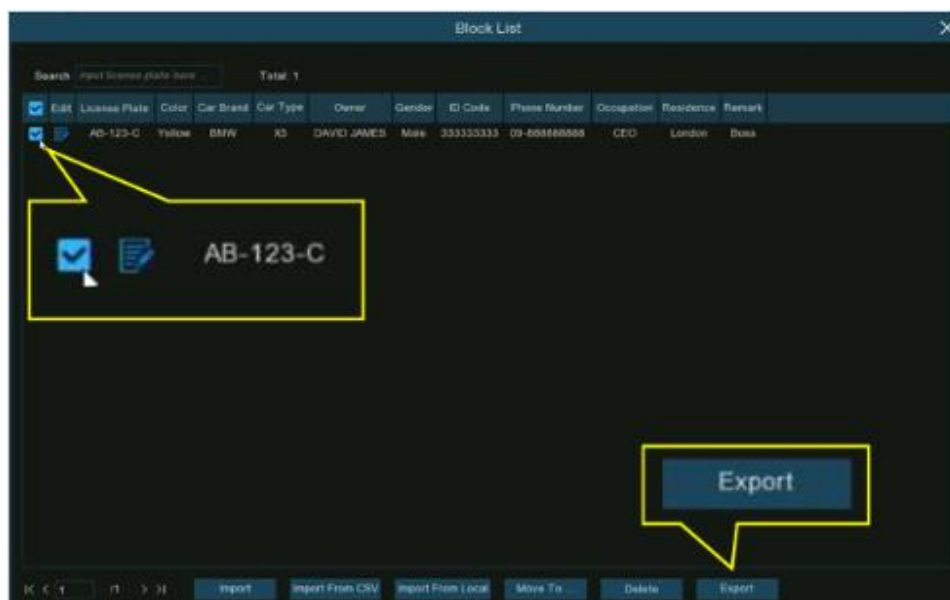

4. A ".csv" file will be exported and saved to your USB flash drive.

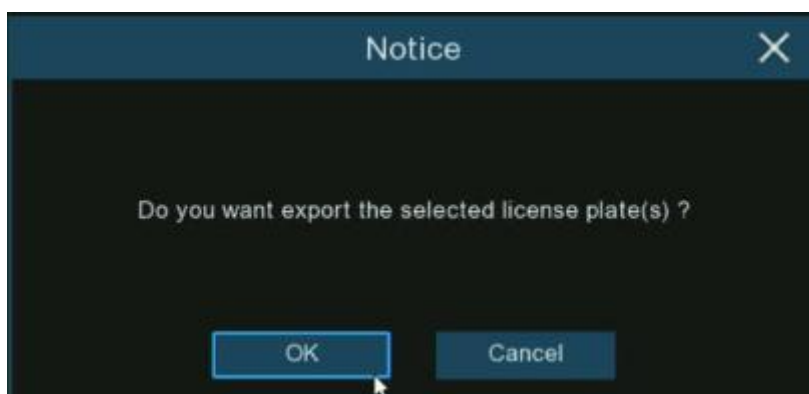

Click **OK** button.

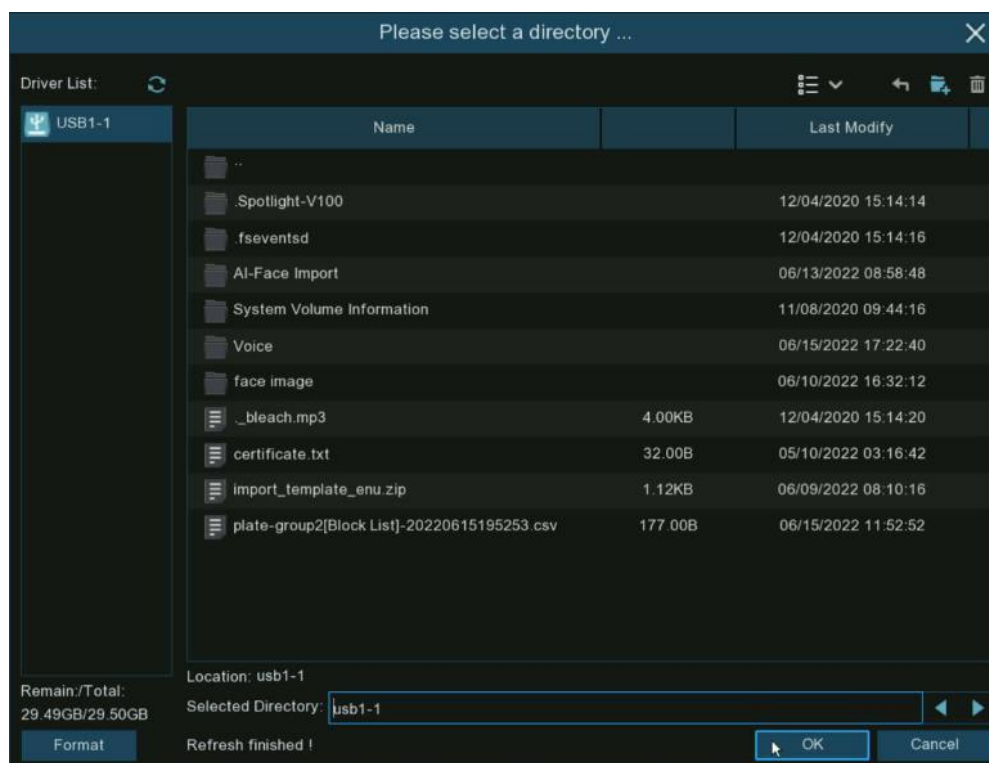

Select the directory you want to save the file, and then Click **OK** button.

5. Double click on the exported ".csv" file to run it with excel in your PC. The content is shown as below:

A	B	C	D	E	F	G	H	I	J	K
License Plate	Color	Car Brand	Car Type	Owner	Gender	ID Code	Phone Number	Occupation	Residence	Remark
AB-123-C	blue	BMW	X5	David James	male	1.23457E+17	09-788 788 788	CEO	No. 10, xxx Road, London	Boss

Column A: License number of the vehicle

Column B: Color of the vehicle

Column C: Brand of the vehicle

Column D: Type/model of the vehicle

Column E: Name of the owner of the vehicle

Column F: Gender of the owner of the vehicle

Column G: ID number of the owner of the vehicle

Column H: Phone number of the owner of the vehicle

Column I: Occupation/Job/Career of the owner of the vehicle

Column J: Residence address of the owner of the vehicle




Column K: Remarks column

6. Edit the cells according to your actual conditions as illustrated as below:

License Plate	Color	Car Brand	Car Type	Owner	Gender	ID Code	Phone Number	Occupation	Residence	Remark
AB-123-2	blue	BMW	X5	Anna Joyce	Female	12345678911111	09-788 788 788	Professor	No. 10, xxx Road, London	
AB-123-3	yellow	Lamborghini	Huracan	Nora Martins	Female	12345678911111	09-788 788 789	Professor	No. 11, xxx Road, London	Boss
AB-123-4	black	Volkswagen	Bora	Shelly Clinton	Female	12345678911111	09-788 788 790	Editor	No. 12, xxx Road, London	
AB-123-5	green	Hyundai	Tucson	Sinna Donald	Female	12345678911111	09-788 788 791	Photographer	No. 13, xxx Road, London	
AB-123-6	black	Toyota	Highlander	James Timothy	Male	12345678911111	09-788 788 792	Director	No. 14, xxx Road, London	
AB-123-7	white	Honda	Accord	Juelly Smith	Female	12345678911111	09-788 788 793	Cashier	No. 15, xxx Road, London	
AB-123-8	black	Peugeot	4008	Kally Jones	Female	12345678911111	09-788 788 794	Reporter	No. 16, xxx Road, London	
AB-123-9	black	Chevrolet	Blazer	Kevin Williams	Male	12345678911111	09-788 788 795	Manager	No. 17, xxx Road, London	

Please Note: if you input a number uninterruptedly more than 11 digits in a cell, the system will display the number in scientific notation, e.g., "1.23457E+11". If so, you would need to adjust the format of the column to be "Text": Select the column (especially the column of ID code and phone number) and then click right button of your mouse. Click "Format Cells..." on the pop-up menu.

Choose "Text", and then click "OK" button.

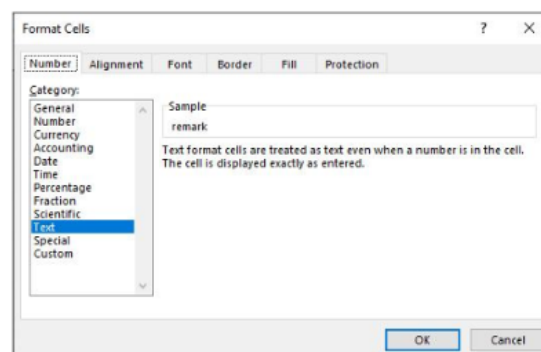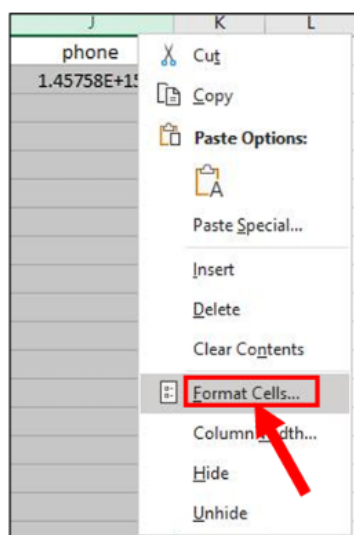

7. Save the ".csv" file. Make sure the file is saved as CSV UTF-8 type.



8. Copy and paste the ".csv" file to your USB flash drive.

9. Insert the USB flash drive into the USB port of your NVR.


10. Click the "Edit" button of the group that you would like to import vehicle license profiles for.



11. Click "Import from CSV" button, and then choose the ".csv" file from USB flash drive and click OK.

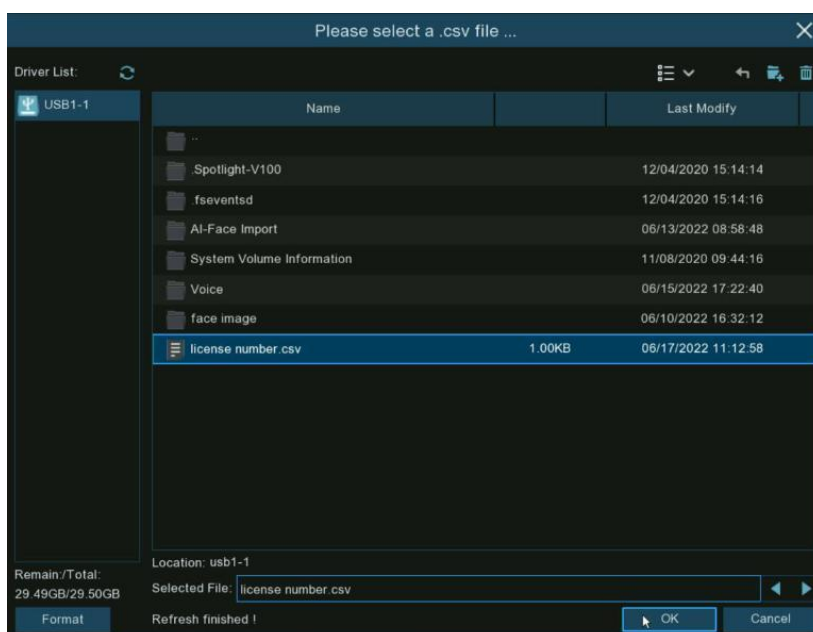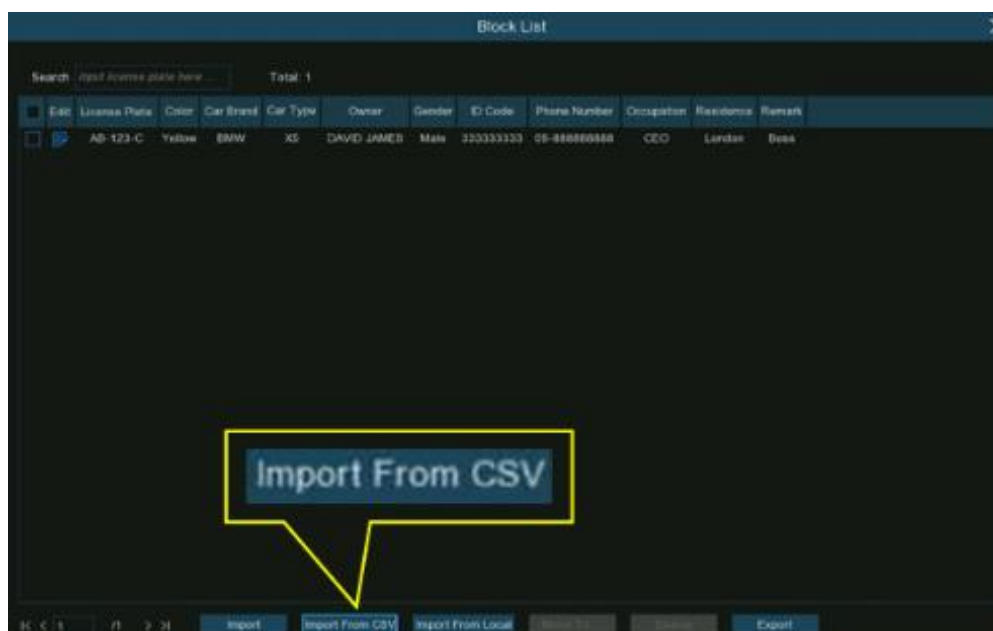

12. Now you can see a list of license number as illustrated below. Click on one of the license numbers, the detailed information will be list on the right side. Click **Import** button to import the license profiles into the NVR and click **Exit** to finish.

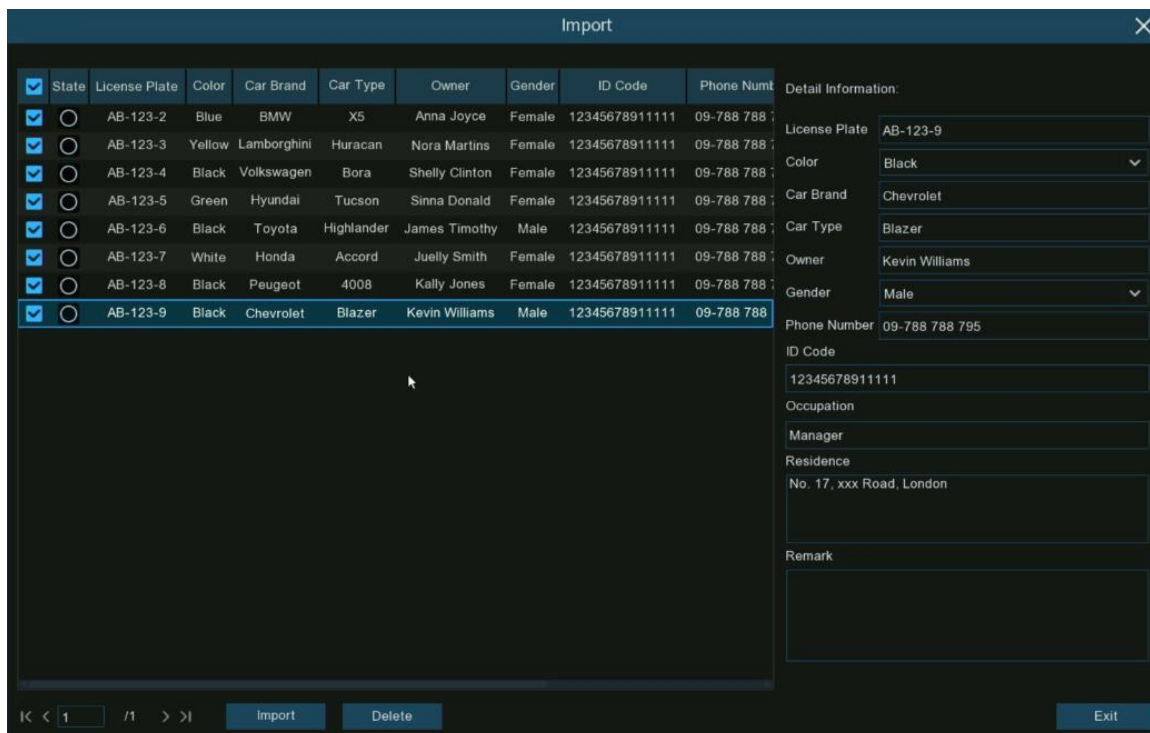

State	License Plate	Color	Car Brand	Car Type	Owner	Gender	ID Code	Phone Number
☒	AB-123-2	Blue	BMW	X5	Anna Joyce	Female	12345678911111	09-788 788
☒	AB-123-3	Yellow	Lamborghini	Huracan	Nora Martins	Female	12345678911111	09-788 788
☒	AB-123-4	Black	Volkswagen	Bora	Shelly Clinton	Female	12345678911111	09-788 788
☒	AB-123-5	Green	Hyundai	Tucson	Sinna Donald	Female	12345678911111	09-788 788
☒	AB-123-6	Black	Toyota	Highlander	James Timothy	Male	12345678911111	09-788 788
☒	AB-123-7	White	Honda	Accord	Juelly Smith	Female	12345678911111	09-788 788
☒	AB-123-8	Black	Peugeot	4008	Kally Jones	Female	12345678911111	09-788 788
☒	AB-123-9	Black	Chevrolet	Blazer	Kevin Williams	Male	12345678911111	09-788 788

5.4.2.3.4. Edit License Profiles

If you want to edit or delete a face profile, please proceed as below:

1. Click the "Edit" button of the group that you would like to edit the vehicle license profiles for.



	Group Name	+/-	Edit	Enable
1	Allow List			☒
2	Block List			☒
3	Unkown			☒

2. If you want to modify the information for a license profile, click the edit button in front of the license number.

Block List

Search: ABOUT license plate here ... Total: 9

	Edit	License Plate	Color	Car Brand	Car Type	Owner	Gender	ID Code	Phone Number	Occupation	Residence	Remark
☒		AB-123-C	Yellow	BMW	X5	DAVID JAMES	Male	333333333	09-888888888	CEO	London	Boss
☒		AB-123-D	Yellow	BMW	X5	Anna Joyce	Female	12345678911111	09-788 788 788	Professor	No. 10, xxx Road, London	Boss
☒		AB-123-E	Yellow	BMW	X5	Nora Martins	Female	12345678911111	09-788 788 788	Professor	No. 11, xxx Road, London	Boss
☒		AB-123-F	Yellow	BMW	X5	Shelly Clinton	Female	12345678911111	09-788 788 790	Editor	No. 12, xxx Road, London	
☒		AB-123-G	Yellow	BMW	X5	Sirna Donald	Female	12345678911111	09-788 788 791	Photographer	No. 13, xxx Road, London	
☒		AB-123-H	Black	Toyota	Highlander	James Timothy	Male	12345678911111	09-788 788 792	Director	No. 14, xxx Road, London	
☒		AB-123-I	White	Honda	Accord	Justy Smith	Female	12345678911111	09-788 788 793	Cashier	No. 15, xxx Road, London	
☒		AB-123-J	Black	Peugeot	4008	Kelly Jones	Female	12345678911111	09-788 788 794	Reporter	No. 16, xxx Road, London	
☒		AB-123-K	Black	Chevrolet	Blazer	Kevin Williams	Male	12345678911111	09-788 788 795	Manager	No. 17, xxx Road, London	

Modify the information on the Modify window accordingly, and then click **Modify** button to apply.
Click to modify

Modify

License Plate: 

Color:

Car Brand: Car Type:

Owner: Gender:

ID Code: Occupation:

Phone Number:

Residence:

Remark:

Alarm Channel: 

3. If you want to delete, move or export license profile(s), please proceed as below:

Block List

Search Total: 9

☐	Edit	Type	Owner	Gender	ID Code	Phone Number	Occupation	Residence	Remark
☒		X5	DAVID JAMES	Male	333333333	09-888888888	CEO	London	Boss
☒		X5	Anna Joyce	Female	1234567891111	09-788 788 788	Professor	No. 10, xxx Road, London	
☒		AB-123-3 Yellow Lamborghini	Nora Martins	Female	1234567891111	09-788 788 789	Professor	No. 11, xxx Road, London	Boss
☐		AB-123-4 Black Volkswagen Bora	Shelly Clinton	Female	1234567891111	09-788 788 790	Editor	No. 12, xxx Road, London	
☐		AB-123-5 Green Hyundai Tucson	Sinna Donald	Female	1234567891111	09-788 788 791	Photographer	No. 13, xxx Road, London	
☐		AB-123-6 Black Toyota Highlander	James Timothy	Male	1234567891111	09-788 788 792	Director	No. 14, xxx Road, London	
☒		AB-123-7 White Honda Accord	Juelly Smith	Female	1234567891111	09-788 788 793	Cashier	No. 15, xxx Road, London	
☒		AB-123-8 Black Peugeot 4008	Kally Jones	Female	1234567891111	09-788 788 794	Reporter	No. 16, xxx Road, London	
☒		AB-123-9 Black Chevrolet Blazer	Kevin Williams	Male	1234567891111	09-788 788 795	Manager	No. 17, xxx Road, London	

Tick the checkbox to select the license profile firstly:

- If you want to delete, click "**Delete**" button and confirm to delete the selected license profile(s).
- If you want to move the profiles to another group, click "**Move To...**" button, and then select the targeted group.
- If you want to export the profiles to USB flash drive, click "**Export**" button to save a ".csv" file.

5.4.3. AI Alarm Settings

In this section, you can configure the alarm actions when event occurs.

5.4.3.1. FR (Face Recognition) Alarm Settings

To configure alarm actions for different groups when faces detected.

Setup Recognition Alarm Statistics	FD <u>FR</u> AD LPR PD & VD PID LCD CC CD QD LPD RSD SOD Sound Detection Video Tampering											
		Group Name			Enable Alarm	Policy	Similarity		Alarm	Alarm Schedule	Alarm Channel	
	1		Allow List				Allow	≥ 70 %				
	2		Block List				Deny	≥ 70 %				
	3		Stranger				Stranger	< 70 %				
	4		Group 1				Allow	≥ 70 %				
	5		Group 2				Allow	≥ 70 %				
	6		Group 3				Allow	≥ 70 %				

Enable Alarm: Tick the checkbox of the group(s) you want to enable alarm function. If the checkbox isn't enabled, no actions specified for the group such as alarm notifications will be actioned by your NVR. It is strongly recommended that the "Enable" checkbox for the "**Stranger**" group remains ticked. This allows your NVR to save the images of every single face detected, including those that do not match any existing face profiles to the database. You can use these captured face images later to create or improve face profiles in the Allow List & Block List groups.


Policy: This setting is non-configurable for the three preset face groups. If a customized group has been created, you can set the policy of your customized group to either **Allow** or **Deny**.

Similarity: Set how closely, in percentage terms, the detected face must match a face profile in the group to be considered a recognized match. The default threshold is 70%. A higher percentage of similarity will result in fewer false recognition results.

Alarm: Click the button setup to specify the group actions to be taken by your NVR when a face recognition event has occurred.

Alarm [Allow List]										
Channel	Buzzer	Alarm Out	Latch Time	Face Capture	Save Background	Show Thumbnail	Send Email	FTP Picture Upload	Pto Cloud	Voice Prompts
CH1	Disable		10 s				☐		☐	
CH2	Disable		10 s				☐		☐	
CH3	Disable		10 s				☐		☐	
CH4	Disable		10 s				☐		☐	
CH5	Disable		10 s				☐		☐	
CH6	Disable		10 s				☐		☐	
CH7	Disable		10 s				☐		☐	
CH8	Disable		10 s				☐		☐	


- **Buzzer:** When alarm event is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.
- **Alarm Out:** If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

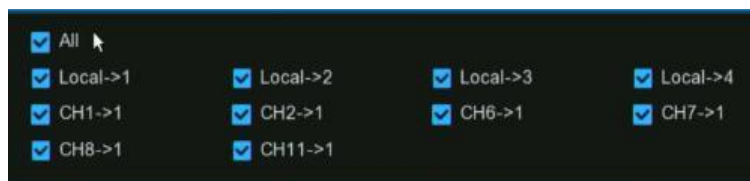

Local: External alarm devices connected to the NVR.


CHx->1: External alarm devices connected to IP cameras.

- **Latch Time:** To configure the external alarm time when the detection is triggered.
- **Face Capture:** Configure whether the snapshot of the recognized face will be saved to the face database on your NVR. Leave this option enabled so more facial images can be added to profiles later to improve the accuracy of face recognition.
- **Save Background:** Whether the snapshot of the background will be saved together with the face image. It is recommended to leave this option enabled.
- **Show Thumbnail:** Whether to generate a facial recognition event notification that includes a snapshot of the recognized face via the Alarm Notification Panel in Live View mode. Disabling this option will stop facial recognition events from appearing in the Alarm Notification Panel.
- **Send Email:** An email alert will be sent when alarm event is detected. Click the checkbox if you want to disable this.
- **FTP Picture Upload:** Click the checkbox to copy snapshots to your ftp server when the detection is triggered.
- **Picture to Cloud:** Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.
- **Voice Prompts:** If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.



- **Default:** Click "Default" to revert to default settings.
- **Copy:** Use the "Copy" function to apply all settings to the other connected cameras.
- **Save:** Click "Save" to save settings.

Alarm Schedule: Click setup button to configure the schedule of when actions specified for the group will take effect. To set the schedule, choose one channel then drag the cursor to mark the slots. The sky-blue blocks in the time slots will be active for alarm actions. The schedule is valid only for the selected channel each time when you set. If you want to use the same schedule for other channels, use **Copy** function. Click **Save** to save your settings.

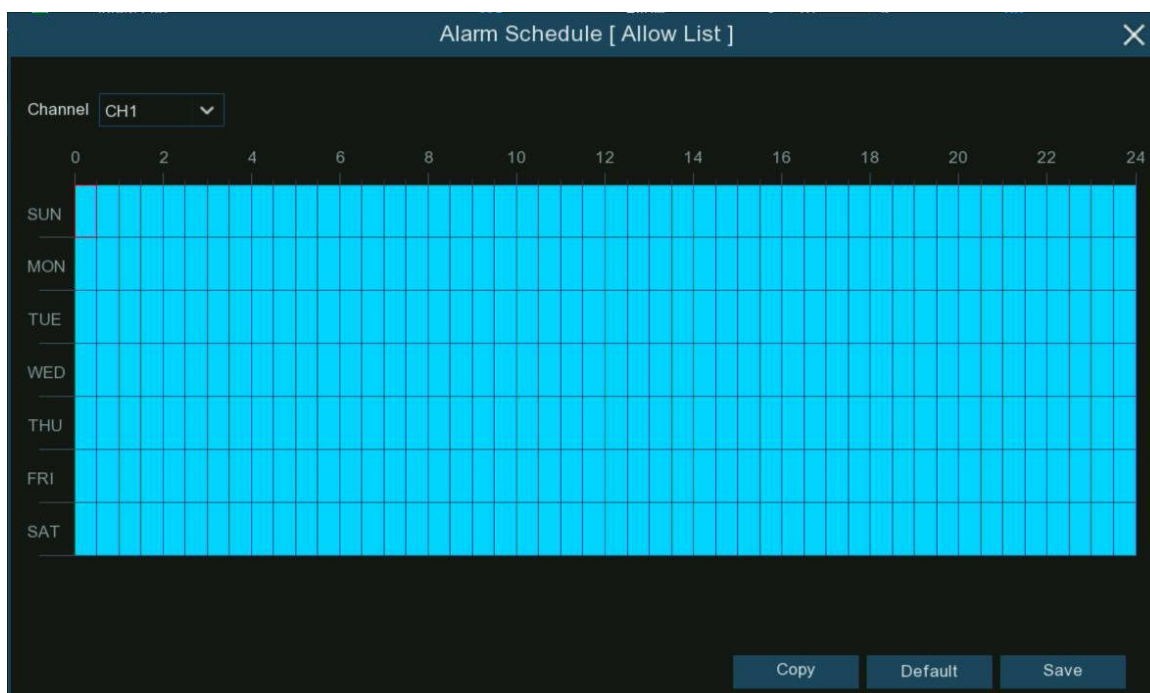

Alarm Channel: Click setup button to configure the **Alarm Channel**. The NVR will alert when faces are detected and captured by the selected cameras.

5.4.3.2 AD (Attribution Detection) Alarm Settings

Attribute detection is a function to detect people's facial features and send an alarm according to the settings.

Setup	FD FR AD LPR PD & VD PID LCD CC CD QD LPD RSD SOD Sound Detection Video Tampering														
Recognition	Channel	Alarm Type	Buzzer	Alarm Out	Latch Time	Record	Post Recording	Show Message	Send Email	Full					
Alarm	CH1	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH3	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH5	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH7	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH8	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH9	Close	OFF	ON	10 s	ON	30 s	☒	☒						
	CH17	Close	OFF	ON	10 s	ON	30 s	☒	☒						
Statistics															


Alarm Type: Select an alarm trigger condition:

- **No Mask:** When a person is detected not wearing a face mask, the NVR will send an automated alert
- **Wear Mask:** When a person is detected wearing a face mask, the NVR will send an automated alert
- **Close:** The face mask detection will be disabled.

Note: To enable the face mask detection function, you need to enable the Face Detection and Face Attribute function on the camera. If want to get the alert in real-time, you would need to set the snap mode to be Real-time. view more on 5.4.1.1. FD (Face Detection).

Buzzer: When alarm event is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.

Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click settings button, to choose the external alarm devices:

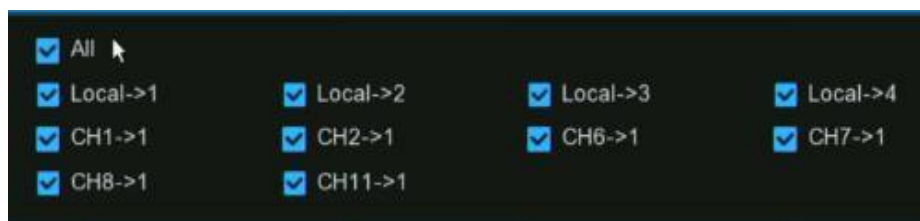


Local: External alarm devices connected to the NVR.

CHx->1: External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click settings button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

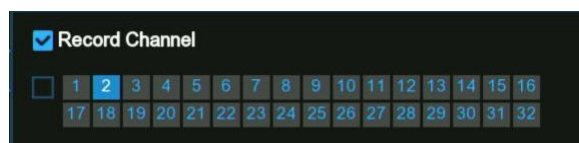

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Click the checkbox if you want to disable this. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.


Default: Click "Default" to revert to default settings.

Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Apply: Click "Apply" to save settings.

5.4.3.3. LPR (License Plate Recognition) Alarm Settings

To configure alarm actions for different groups when vehicle license plates detected.

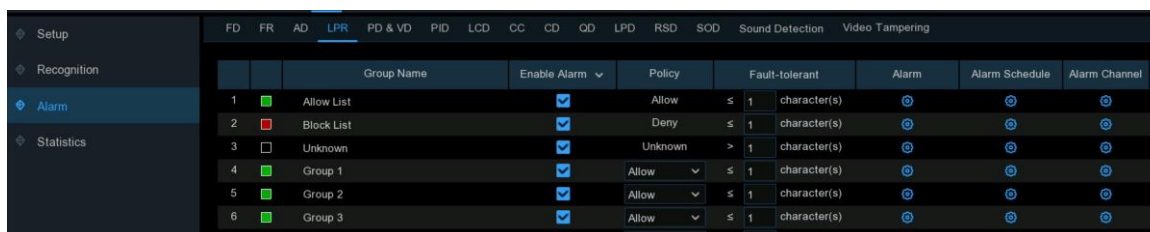

	Group Name	Enable Alarm	Policy	Fault-tolerant	Alarm	Alarm Schedule	Alarm Channel
1	Allow List	☒	Allow	≤ 1 character(s)	☒		
2	Block List	☒	Deny	≤ 1 character(s)	☒		
3	Unknown	☒	Unknown	> 1 character(s)	☒		
4	Group 1	☒	Allow	≤ 1 character(s)	☒		
5	Group 2	☒	Allow	≤ 1 character(s)	☒		
6	Group 3	☒	Allow	≤ 1 character(s)	☒		
7	Group 4	☒	Allow	≤ 1 character(s)	☒		

Enable Alarm: Tick the checkbox of the group(s) you want to enable alarm function. If the checkbox isn't enabled, no actions specified for the group such as alarm notifications will be actioned by your NVR. It is strongly recommended that the "Enable" checkbox for the "**Unknown**" group remains ticked. This allows your NVR to save the images of every single license plate detected, including those that do not match any existing license profiles to the database. You can use these captured license plate images later to create or improve license profiles in the Allow List & Block List groups.

Policy: This setting is non-configurable for the three preset license groups. If a customized group has been created, you can set the policy of your customized group to either **Allow** or **Deny**.

Fault Tolerance: Varies in image resolution, light strength, camera angles, moving speed of the vehicle and etc., character(s) in the license plate number might be failed to recognize. Set the Fault Tolerance that how many characters the detected license allowed to be different from the license number saved in the group. If the number of difference characters between the detected license number and a license profile in the group is no more than the set value, the detected license will be considered a recognized match.


Recognized Number	License	Number Profile	in License	Fault Tolerance	Recognition Result
AB123C		AB-123-C		≤2 characters	True
AB123C		AB-123-C		≤0 or 1 character	False
A8I23C		AB123C		≤2 characters	True
A8I23C		AB123C		≤0 or 1 character	False
B594SB		B734KB		≤3 characters	True
B594SB		B734KB		≤2 character	False

Recognized Number	License	Number in License Profile	Fault Tolerance	Recognition Result
AB132C		AB123C	≤2 characters	True
AB123C		AB123C	≤0 or 1 character	False


Samples for true of false result

Note: Only English letters and digit numbers will be recognized by the system, special symbols, like underline , virgule /, hyphen -, will be excluded from being recognized. Please set the Fault Tolerance accordingly if you have input special symbols in the license number when creating a license profile.

Alarm: Click the button setup to specify the group actions to be taken by your NVR when a face recognition event has occurred.

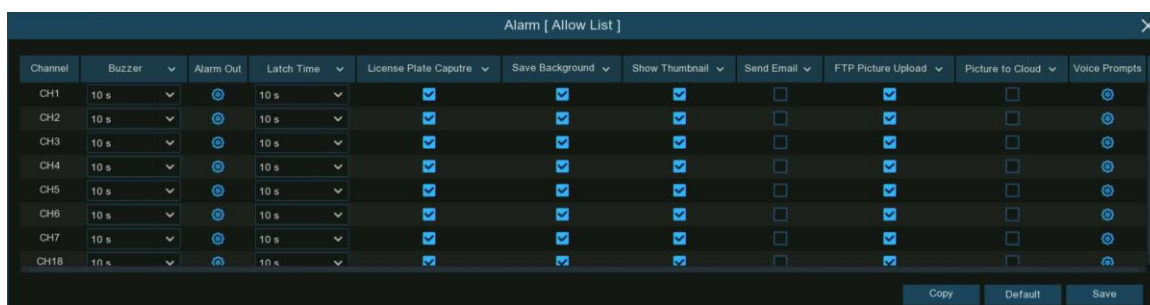


- **Buzzer:** When alarm event is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.
- **Alarm Out:** If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

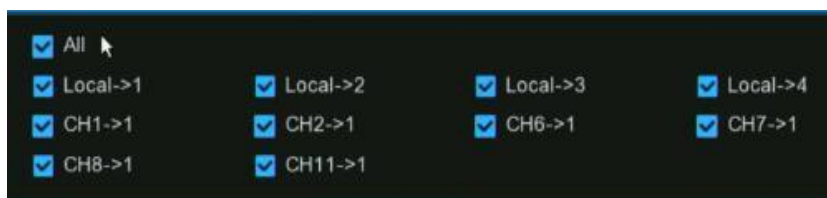

CHx->1: External alarm devices connected to IP cameras.

- **Latch Time:** To configure the external alarm time when the detection is triggered.
- **License Plate Capture:** Configure whether the snapshot of the recognized license plate will be saved to the license database on your NVR. Leave this option enabled so more license plate images can be added to profiles later to improve the accuracy of license plate recognition.


- **Save Background:** Whether the snapshot of the background will be saved together with the license plate image. It is recommended to leave this option enabled.
- **Show Thumbnail:** Whether to generate a license plate recognition event notification that includes a snapshot of the recognized license plate via the Alarm Notification Panel in Live View mode. Disabling this option will stop license plate recognition events from appearing in the Alarm Notification Panel.
- **Send Email:** An email alert will be sent when alarm event is detected. Click the checkbox if you want to disable this.
- **FTP Picture Upload:** Click the checkbox to copy snapshots to your ftp server when the detection is triggered.
- **Picture to Cloud:** Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.
- **Voice Prompts:** If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.



- **Default:** Click "**Default**" to revert to default settings.
- **Copy:** Use the "**Copy**" function to apply all settings to the other connected cameras.
- **Save:** Click "**Save**" to save settings.

Alarm Schedule: Click setup button to configure the schedule of when actions specified for the group will take effect.


To set the schedule, choose one channel then drag the cursor to mark the slots. The sky-blue blocks in the time slots will be active for alarm actions. The schedule is valid only for the selected channel each time when you set. If you want to use the same schedule for other channels, use **Copy** function. Click **Save** to save your settings.

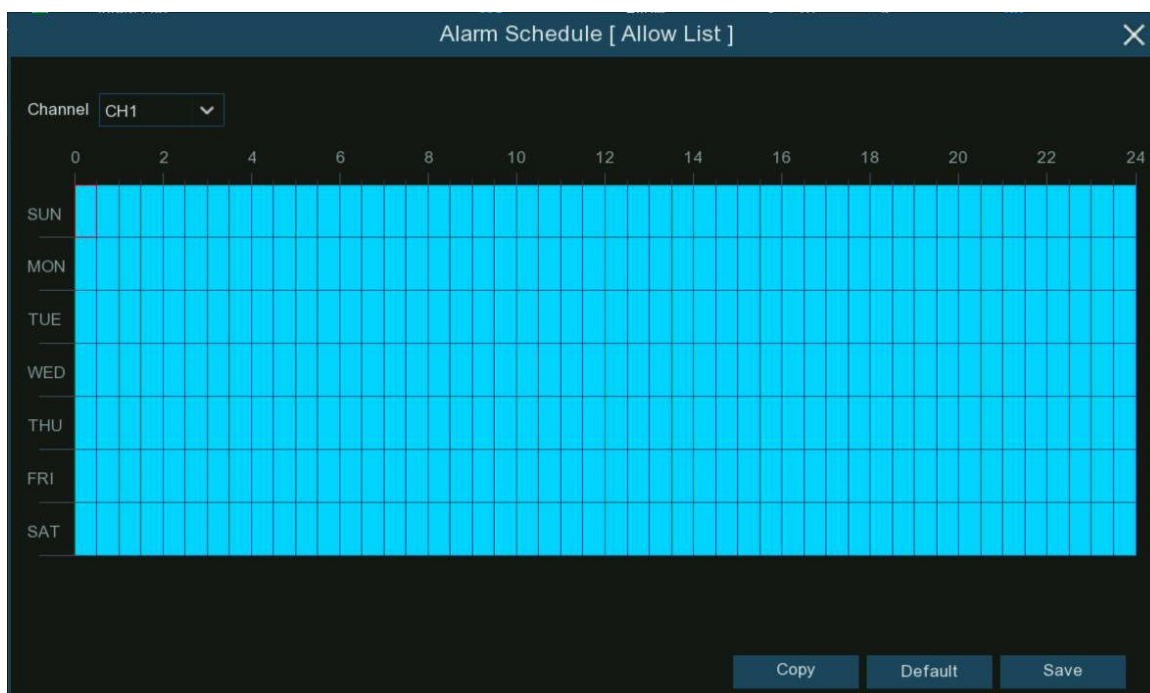

Alarm Channel: Click setup button to configure the **Alarm Channel**. The NVR will alert when faces are detected and captured by the selected cameras.


5.4.3.4. PD & VD (Human & Vehicle Detection) Alarm Settings

To configure alarm actions when human beings and/or vehicles are detected.

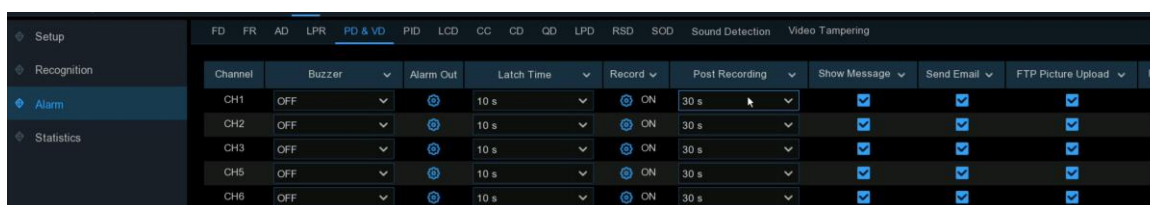

Buzzer: When alarm event is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.

Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

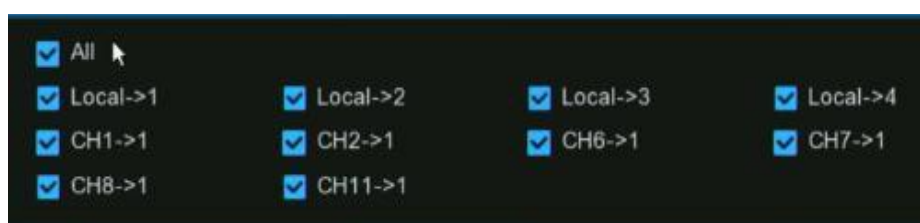


Local: External alarm devices connected to the NVR.

CHx->1: External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not.

Click button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

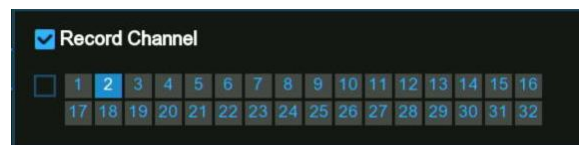

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Click the checkbox if you want to disable this.

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.

Default: Click "Default" to revert to default settings.


Copy: Use the "Copy" function to apply all settings to the other connected cameras.

Apply: Click "Apply" to save settings.

5.4.3.5. FD/PID/LCD/CC/CD/QD/LPD/RSD/SOD/Sound Detection/Video Tampering Alarm Settings


The setting method to configure alarm actions is same for FD, PID, LCD, CC, CD, QD, LPD, RSD, SOD, Sound Detection and Video Tampering.

Note: LPD (License Plate Detection) is different from LPR (License Plate Recognition). LPD emphasizes on "detection", which will take actions when license plates are detected by the camera, no matter the license plates are documented in the database or not. LPR emphasizes on "recognition" and triggers the alarm actions with recognition result.

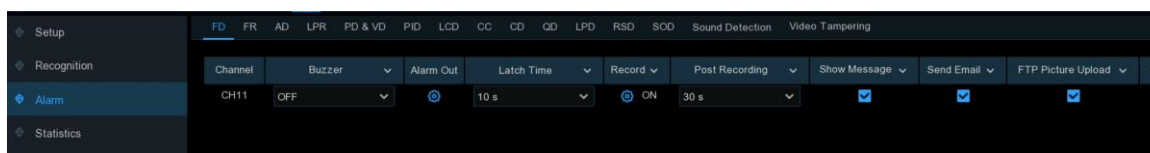

Buzzer: When alarm event is detected, you can enable the NVR's buzzer to alert you for a predetermined amount of time. Click the drop-down menu to select a time.


Alarm Out: If your NVR or IP camera supports to connect external replay output devices, the system can send an alert message to the external alarm devices. Click button, to choose the external alarm devices:

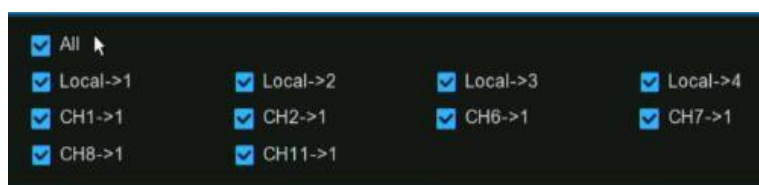

Local: External alarm devices connected to the NVR. **CHx->1:** External alarm devices connected to IP cameras.

Latch Time: To configure the external alarm time when the detection is triggered.

Record: This option instructs your NVR to trigger additional cameras to start recording when motion is detected. Click the drop-down arrow to choose all channels to be recorded or not. Click setting button, click the "Record Channel" checkbox to enable recording. Click the checkbox in front of the channel number to select all channels or click on the individual camera number that you want to trigger for recording.

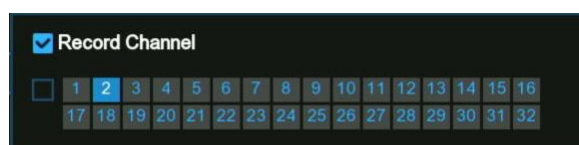

Post Recording: This option instructs your NVR to record for a set time after an event has occurred. For most instances, the default selection will be suitable, however, you can change this if you wish.

Show Message: When the detection is triggered, the alarm icon will appear on screen.

Send Email: An email alert will be sent when alarm event is detected. Click the checkbox if you want to disable this.

FTP Picture Upload: Click the checkbox to copy snapshots to your ftp server when the detection is triggered.

FTP Video Upload: Click the checkbox to copy videos to your ftp server when the detection is triggered.

Picture to Cloud: Click the checkbox to copy snapshots to the cloud via Dropbox or Google Drive when the detection is triggered.

Video to Cloud: Click the checkbox to copy videos to the cloud via Dropbox or Google Drive when the detection is triggered. **Full Screen:** Click the checkbox to view the camera full-screen in Live View mode when the detection is triggered.

Voice Prompts: If your NVR connects with a speaker, you can select a customized alert voice when the detection is triggered. See how to add customized alert voice on **5.3.9 Voice Prompts**.


Default: Click "**Default**" to revert to default settings.

Copy: Use the "**Copy**" function to apply all settings to the other connected cameras.

Apply: Click "**Apply**" to save settings.


5.4.4. Statistics

Your NVR can retrieve and present statistical data relating to the detection of objects when related AI detection is enabled on the camera.

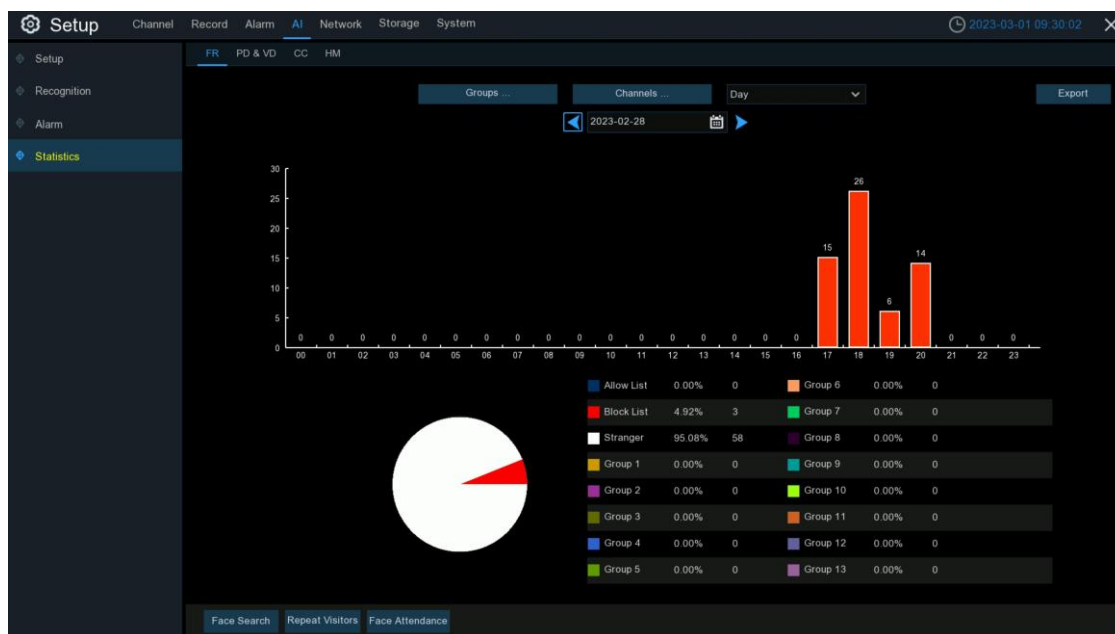

5.4.4.1. FR (Face Recognition) Statistics

Your NVR can retrieve and present statistical data relating to the detection of faces when the Face Recognition is enabled on the camera. The bar chart displays the number of faces that were detected during a particular time period while the pie chart displays the percentage share and frequency of detected faces belonging to each group.

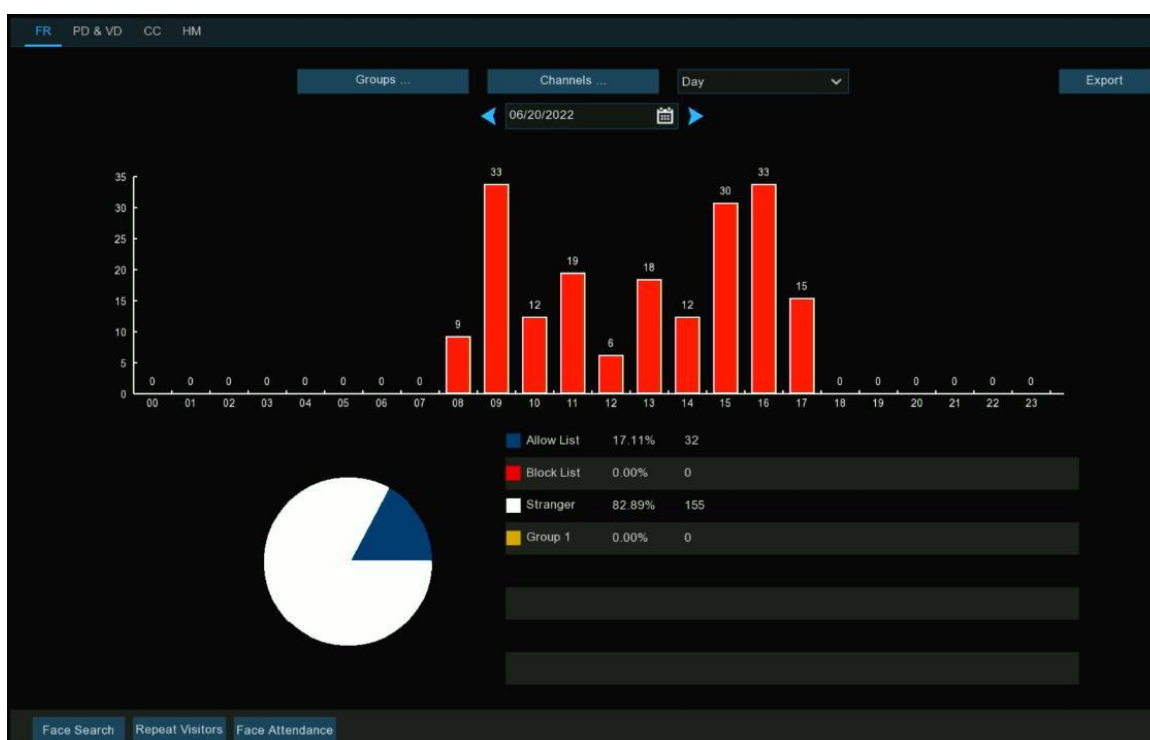

Groups: Select the groups from which the face recognition data is obtained. By default, all groups have been selected.

Channels: Select the channels from which the face recognition data is obtained. By default, all channels have been selected.


Day/Week/Month/Quarter/Year: Click the drop-down menu to select the time period from which the face recognition data is obtained.

Calendar: Change the start date of the selected time period, click < or > button to move to last or next period.

Export: Export the facial recognition data for the selected time period to a USB flash drive. The file will be saved as a *.CSV file. You can open the file in Excel (or similar software) to further analyze the data.

5.4.4.2. PD & VD (Human & Vehicle Detection) Statistics

Your NVR can retrieve and present statistical data relating to the detection of objects when the Human & Vehicle video analytic is enabled on the camera. The bar chart displays the number of humans and/or vehicles that were detected during a particular time.

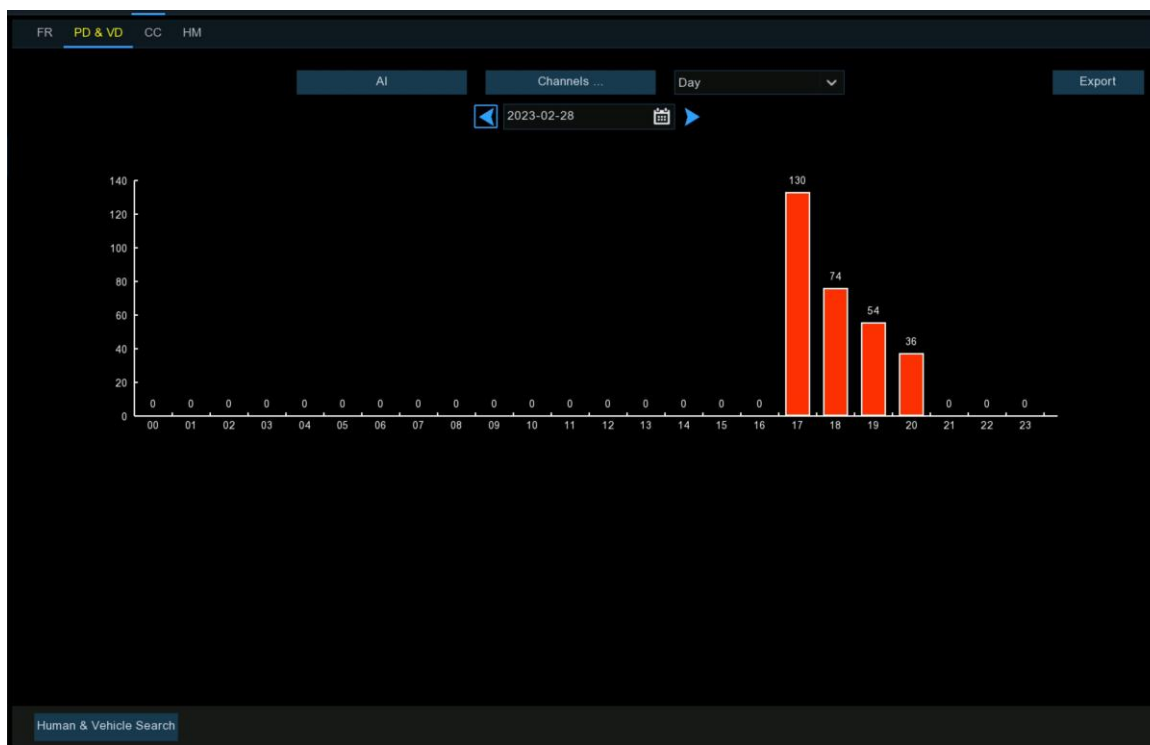

AI: Click on the button to select the detection type(s) from which the human & vehicle detection data is obtained. By default, all types have been selected.

Channels: Select the channels from which the human & vehicle detection data is obtained. By default, all channels have been selected.

Day/Week/Month/Quarter/Year: Click the drop-down menu to select the time period from which human & vehicle detection data is obtained.


Calendar: Change the start date of the selected time period, click or button to move to last or next period.

Export: Export the facial recognition data for the selected time period to a USB flash drive. The file will be saved as a *.CSV file. You can open the file in Excel (or similar software) to further analyze the data.

5.4.4.3. CC (Cross Counting) Statistics


Your NVR can retrieve and present statistical data relating to the times an object or person had crossed a counting line when cross counting detection is enabled on the camera.

1. Choose the **Channel & Date** you want to search.
2. Choose the **Cross Type**: Cross In or Cross Out.
3. Choose the **Detection Type** from Motion, Person, Motor Vehicle or Non-motor Vehicle.
4. Click **Search** button, the result will be displayed in column chart as default. You can click **Line Chart** to change its display mode.
5. The statistical data is searched and displayed a daily report by default. You can change the **Report Type** to choose a Weekly, Monthly or Annual report, and then click **Search** again.
6. Click **Export** button if you want to export the statistical data to USB flash drive. The file will be saved as a *.CSV file. You can open the file in Excel (or similar software) to further analyze the data.

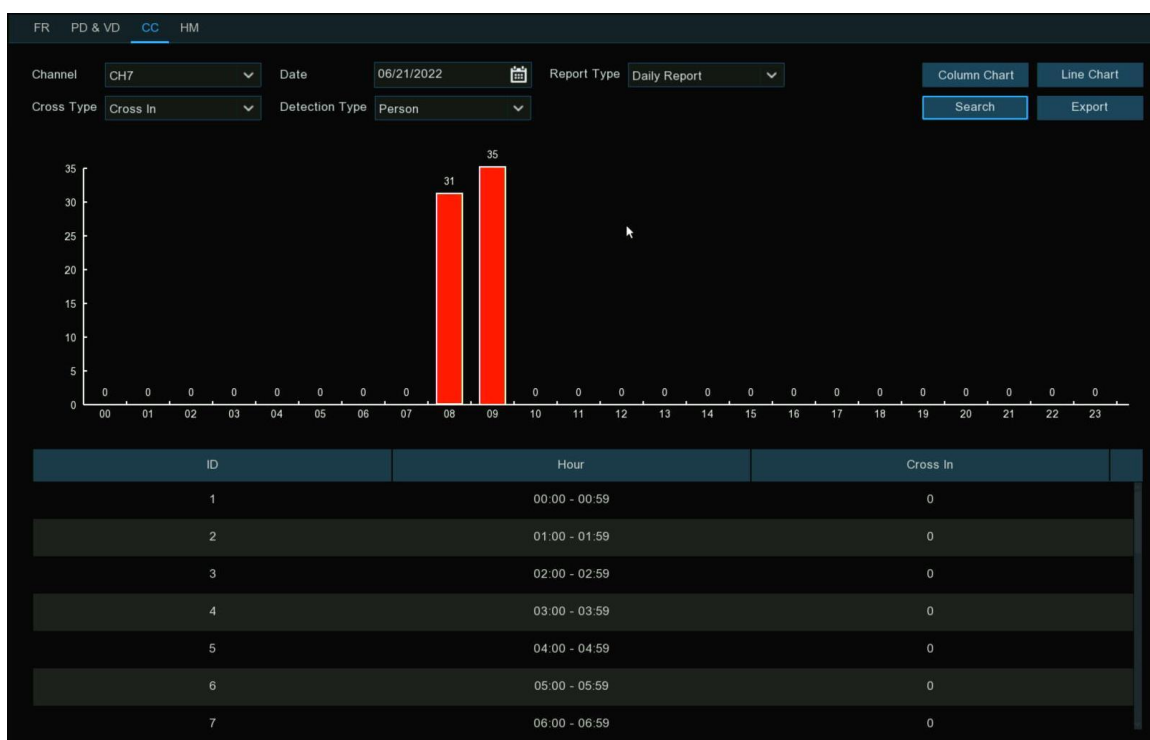

5.4.4.4. HM (Heat Map) Statistics

Your NVR can retrieve and present statistical data relating to the detection of objects when the Heat Map video analytic is enabled on the camera. The color map gives you a visual display showing the area and frequency of motion detected. Warm colors represent high frequency and cool colors represent low frequency.

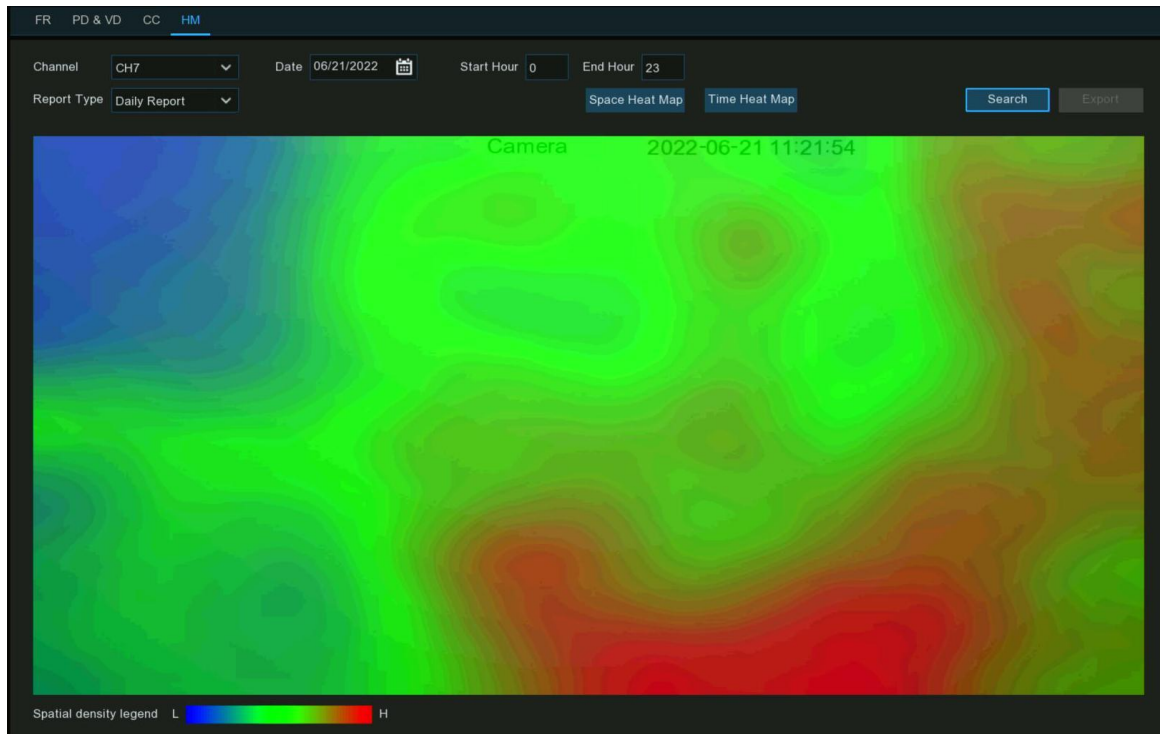

Channel: Select the channel from which the heat map statistic is obtained.

Report Type: Select daily, weekly, monthly or annual.

Date: Select the relevant date.

Start/End Hour: Select the relevant start and end hours.

Click "**Search**" to display the heat map statistic.

The Spatial Density Color represents the frequency of motion detected.


5.5. Network

This menu allows you to configure network parameters

5.5.1. General Settings

To configure the network connection parameters here.

5.5.1.1. General

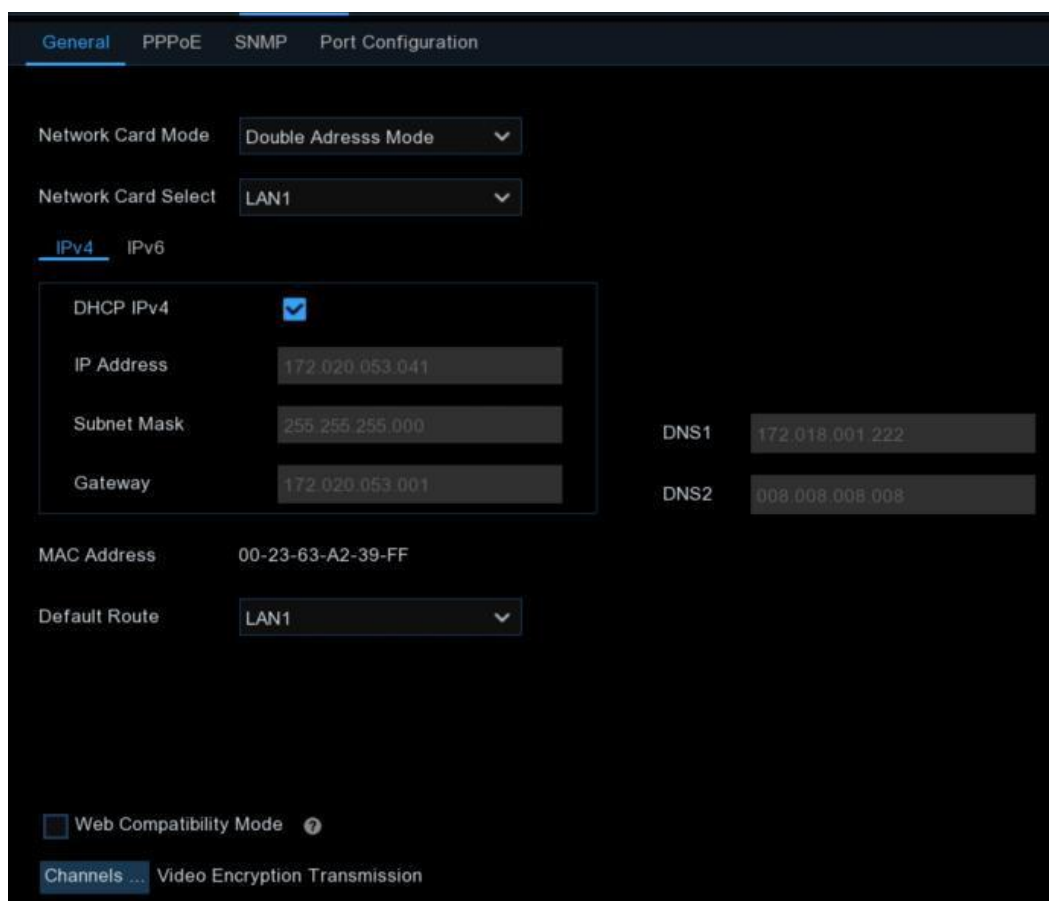

The screenshot shows the 'General' tab of the network configuration interface. At the top, there are tabs for 'General', 'PPPoE', 'SNMP', and 'Port Configuration'. Under 'General', the 'Network Card Mode' is set to 'Double Address Mode' and 'Network Card Select' is set to 'LAN1'. Below this, there are two sub-tabs: 'IPv4' (selected) and 'IPv6'. The 'IPv4' section includes a 'DHCP IPv4' checkbox (checked), an 'IP Address' field (172.020.053.041), a 'Subnet Mask' field (255.255.255.000), and a 'Gateway' field (172.020.053.001). To the right of these fields are 'DNS1' (172.018.001.222) and 'DNS2' (008.008.008.008) fields. Below the IPv4 section, the 'MAC Address' is displayed as 00-23-63-A2-39-FF, and the 'Default Route' is set to 'LAN1'. At the bottom, there is a 'Web Compatibility Mode' checkbox (unchecked) and a 'Channels ...' button. A 'Video Encryption Transmission' link is also visible at the bottom right.

Network Card Mode: Used for switching between Single Address Mode and Double Address Mode. After switching succeeds, the NVR is restarted.

Note: The models with POE support Double Address Mode only.

Single Address Mode: In Single Address Mode, two network ports are bound to one IP address. You can select this mode to increase the bandwidth and form a redundant network card array to share the load. If one network port fails, the other network port will immediately take over all the load and the service will not be interrupted.

Double Address Mode: In Double Address Mode, two network ports are configured with IP addresses and gateways of different network segments respectively, and the two network ports are operating independently of each other. The LAN port for connecting the external network should be configured as the default route.

Network Card Select: Used for setting whether to display the network parameter information of LAN1 or LAN2. This option is not available in Single Address Mode.

DHCP IPv4: To connect a router that allows DHCP, select this option. the router automatically assigns all the IPv4 network parameters to the NVR. If you do not select this option, the IP address, subnet mask, gateway, and DNS will automatically change back to the setting when you unchecked the option last time. (Note: Currently, DHCP IPv6 is not supported.)

IP Address: The IP address is the identification of the NVR in the network. An IP address consists of four numbers between 0 and 255, separated by periods, for example, 192.168.001.100.

Subnet Mask: A subnet mask is a network parameter that defines the range of IP addresses that can be used in the network. A subnet address consists of four numbers, separated by periods, for example, 255.255.000.000.

Gateway: The IP address of the gateway of the network where the device is located. The default value is 192.168.001.001.

DNS1/DNS2: DNS1 is the preferred DNS server and DNS2 is the alternate DNS server.

IPv6 Address: The IPv6 address is the identification of the NVR in the network. An IPv6 address consists of eight numbers between 0 and FFFF, separated by colons. For example, ABCD:EF01:2345:6789:ABCD:EF01:2345:6789.

Subnet Prefix Length: Subnet prefix length.

IPv6 Gateway: The IP address of the IPv6 gateway of the network where the device is located.

Default Route: Default Route: In the dual-access mode, set the LAN port to the external network as the default route.

Note: In Single Address Mode, this option is unavailable.

Web Compatibility Mode: If the device cannot be accessed through the Web, you can select this option to have a try.

Note: Insecure encryption is used when this option is enabled. Thus you must be careful in selecting this option.

Channels...: Click this button to set the channels for encrypting and transmitting video streams to clients.


POE DHCP Server: IP addresses are automatically allocated to the devices connected to the NVR through POE ports. (Only the NVRs supporting POE provide this function.)

POE DHCP Server	☒
IP Address	010.010.025.100
Subnet Mask	255.255.000.000

Note: 1. In Single Network Card Mode, the device can access the network through either of the two LAN ports. If both LAN ports are connected to network cables, they must be connected to the same switch. 2. In Double Network Card mode, the two LAN ports cannot be connected to the same switch.

5.5.1.2. PPPoE Settings

This is a protocol that allows the NVR to connect to the network more directly via DSL modem.

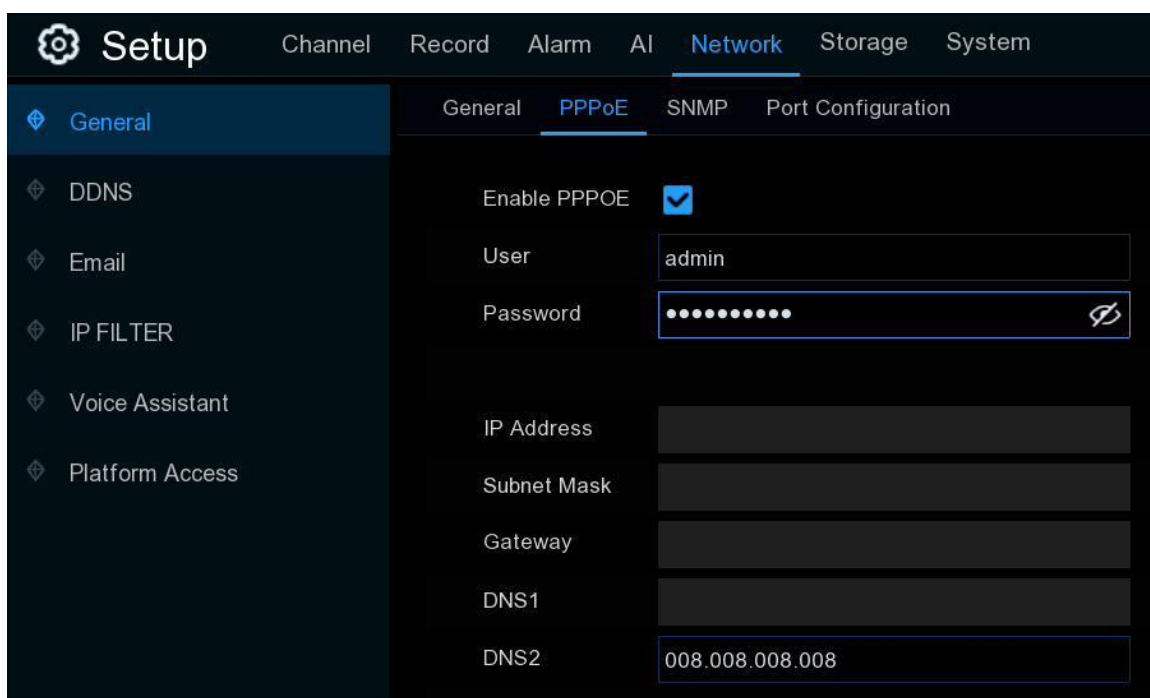


The screenshot shows the 'Setup' menu with the 'Network' tab selected. Under the 'Network' tab, the 'PPPoE' sub-tab is active. The settings are as follows:

Setting	Value
Enable PPPOE	☒
User	admin
Password	
IP Address	
Subnet Mask	
Gateway	
DNS1	
DNS2	008.008.008.008

Tick the checkbox of the "Enable PPPOE", and then enter the User name & Password of the PPPoE you got from your ISP. Click **Apply** to save, system will reboot to active the PPPoE setting.

5.5.1.3. SNMP

SNMP (Simple Network Management Protocol) is an Internet Standard protocol for collecting and organizing information about managed devices on IP networks and for modifying that information to change device behaviour. With the SNMP, you are allowed to connected the NVR with 3rd party network management platform and acquire the NVR information, such as firmware version number, device type, resolution, frame rate, and etc.

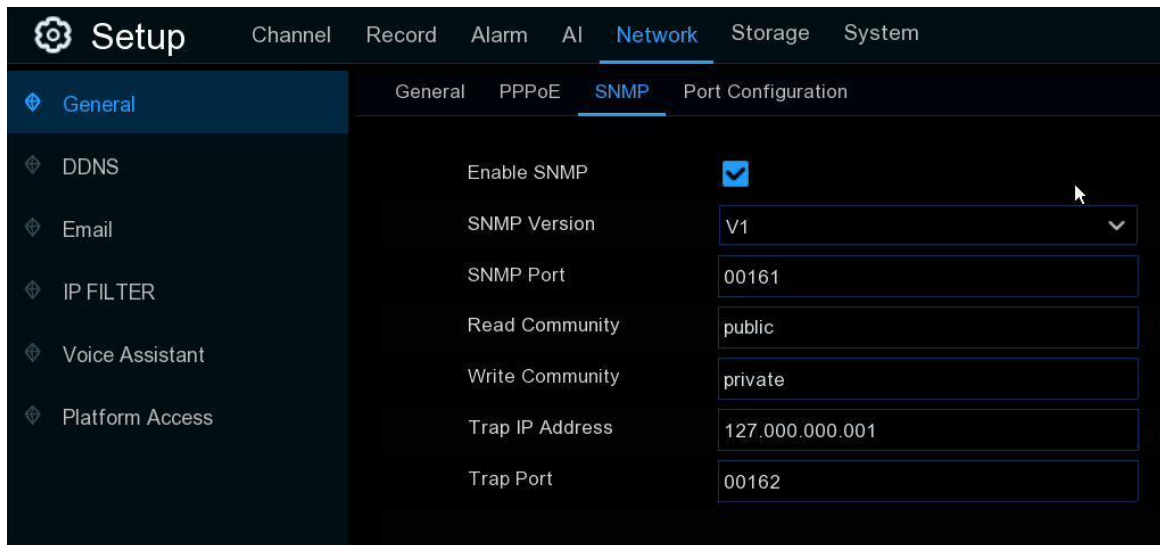


The screenshot shows the 'Setup' menu with 'Network' selected. Under 'Network', the 'SNMP' tab is active. The configuration fields are as follows:

Field	Value
Enable SNMP	☒
SNMP Version	V1
SNMP Port	00161
Read Community	public
Write Community	private
Trap IP Address	127.000.000.001
Trap Port	00162

5.5.1.4. Wireless Connection

If you have a compatible Wi-Fi dongle connected to an available USB port on your NVR, the Wi-Fi tab will appear. This gives you the flexibility of placing your NVR in a different location, without having to be physically connected to your router or modem.

Note: The Wi-Fi connection function is not a universal feature for all models. Inquiry your local dealer before using this feature.

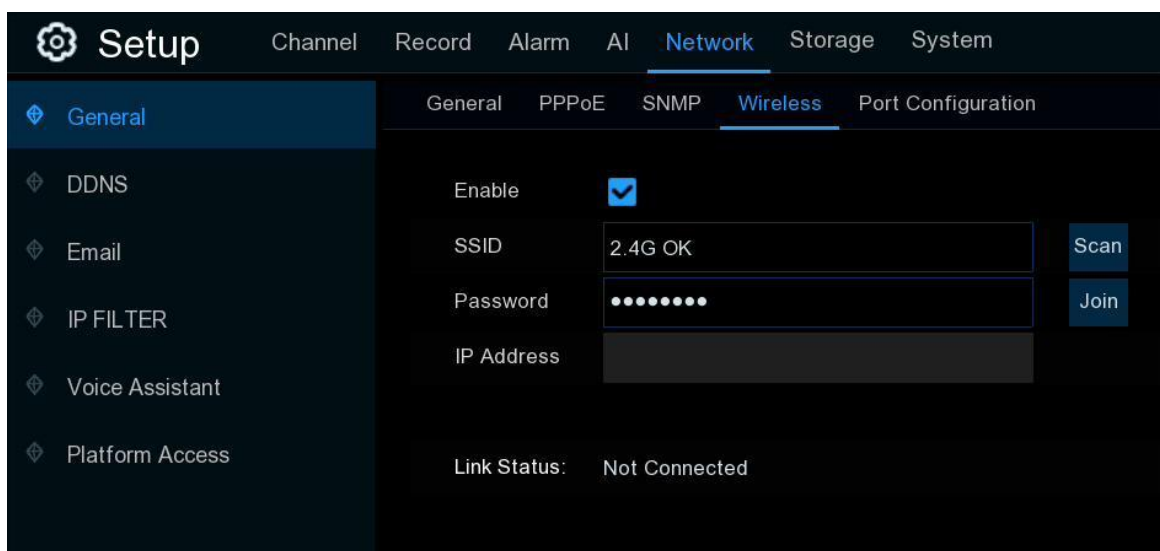

The screenshot shows the 'Setup' menu with 'Network' selected. Under 'Network', the 'Wireless' tab is active. The configuration fields are as follows:

Field	Value	Action
Enable	☒	
SSID	2.4G OK	Scan
Password	••••••••	Join
IP Address		
Link Status:	Not Connected	

Before proceeding, disconnect the Ethernet cable from your NVR's Ethernet port (if connected).

1. Tick the checkbox of **"Enable"** to activate the Wi-Fi connection.
2. Click the **"Scan"** button. After a short moment, a list of Wi-Fi access points that your NVR detects will be shown. If the access point you want to connect is not shown in the list, click **"Update"** button to refresh.

Scan			
SSID	Rate	Security	
TP-Link SRL		[WPA-PSK-CCMP+TKIP][WPA2-PSK-CCMP+TKIP][ESS]	
2.4G OK		[WPA-PSK-CCMP+TKIP][WPA2-PSK-CCMP+TKIP][ESS]	
TP-LINK_3CB4		[WPA-PSK-CCMP][WPA2-PSK-CCMP][ESS]	
\x00\x00\x00\x00\x00\x00		[WPA-PSK-CCMP+TKIP][WPA2-PSK-CCMP+TKIP][ESS]	
CP-ZX-01		[WPA-PSK-CCMP][WPA2-PSK-CCMP][ESS]	
ZX-CP-04		[WPA-PSK-CCMP][WPA2-PSK-CCMP][ESS]	
CPGL-SWANN-2.4G		[WPA-PSK-CCMP+TKIP][WPA2-PSK-CCMP+TKIP][ESS]	
			<button>Update</button>

3. Double click on the access point you want to connect.
4. Input the password for your Wi-Fi access point, then click the "Join" button. Ensure the password is correct before proceeding.
5. After a short moment, your NVR will connect to your Wi-Fi access point. Click "OK" to continue. If the connection has failed, check that the password is correct. The Link Status will change to Connected, showing a successful connection. Click "Apply" to save settings.

5.5.1.5. Port Configuration

Setup		Channel	Record	Alarm	AI	Network	Storage	System
General		General	PPPoE	SNMP	Wireless	Port Configuration		
			Service	Protocol	Internal Port	External Port	UPNP Status	Mapping Strategy
		1	Http/Https/RTSP	TCP	00080	00080	Inactive	Auto
		2	Client	TCP	09000	09000	Inactive	Auto
		Instruction: rtsp://ip:port/rtsp/streaming?channel=A&subtype=B A:01(ch1),02(ch2)... B:0(main stream),1(sub stream)						
		External IP P2P Switch ☒ Forward Port ☒						

http/https/rtsp: This port is mostly used to log into your NVR via webpage or 3rd party streaming player by rtsp protocol. If the default port number (80) is used by other devices in the network, you may need to change it.

Client Port: This is the internal port that your NVR will use to send information through. This particular port number (9000) is not used by many devices, however, if you have another NVR-like device, you may need to change it.

Internal Port: It is mostly used to access the NVR from the same LAN.


External Port: It is mostly used to access the NVR from a different LAN or internet. You need to forward the external ports to internet from your router manually If you want to access your NVR via internet, which would be a little more complicated for users without network knowledge. Using **UPNP** would make it easier. **UPNP** is a network protocol designed to allow network-connected devices to automatically obtain and forward the ports from the router.

	Service	Protocol	Internal Port	External Port	UPNP Status	Mapping Strategy	UPNP
1	Http/Https/RTSP	TCP	00080	13181	Activate	Auto	☒
2	Client	TCP	09000	57826	Activate	Auto	☒

1. Tick the checkbox of "**UPNP**".
2. Choose "**Auto**" on Mapping Strategy, the external port will be automatically obtained and forwarded from your router.
3. If you want to change the external port by manual, choose "**Manual**" on Mapping Strategy and then modify the port accordingly.

P2P Switch: Click to enable P2P function.

IP Camera Hyperlink: This advanced feature allows to visit the webpage of the IP cameras which are connected to the NVR when you're accessing in the NVR's webpage. Tick the checkbox to enable this feature and click "**Apply**" to save, you will find the hyperlink of each capable IP camera on the NVR's webpage.

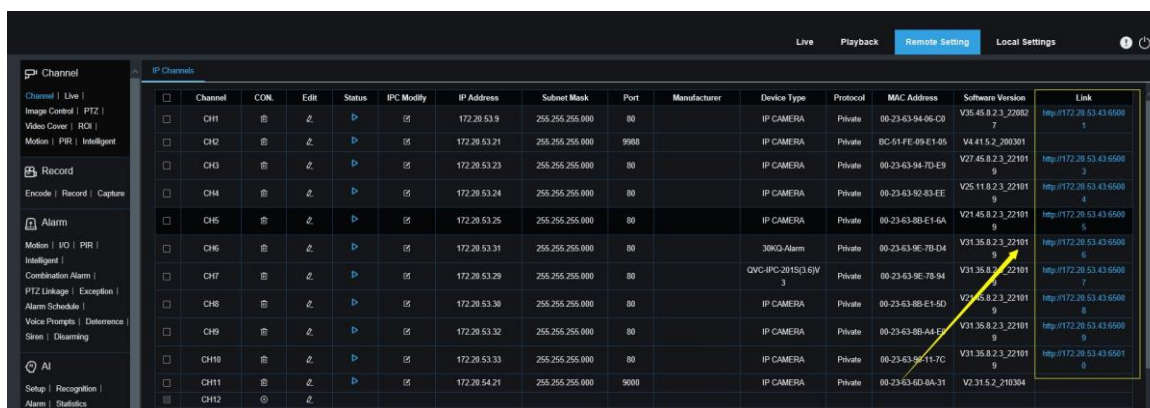


Channel	CON.	Edit	Status	IPC Modify	IP Address	Subnet Mask	Port	Manufacturer	Device Type	Protocol	MAC Address	Software Version	Link
CH1					172.28.53.9	255.255.255.000	80		IP CAMERA	Private	00-23-43-94-06-C0	V35.45.8.2.3_220827	http://172.28.53.43:65000/1
CH2					172.28.53.21	255.255.255.000	9688		IP CAMERA	Private	0C-51-FE-49-E1-05	V4.41.5.2_200301	http://172.28.53.43:65000/2
CH3					172.28.53.23	255.255.255.000	80		IP CAMERA	Private	00-23-43-94-7D-E9	V27.45.8.2.3_221019	http://172.28.53.43:65000/3
CH4					172.28.53.24	255.255.255.000	80		IP CAMERA	Private	00-23-43-92-83-EE	V25.11.8.2.3_221019	http://172.28.53.43:65000/4
CH5					172.28.53.25	255.255.255.000	80		IP CAMERA	Private	00-23-43-8B-E1-6A	V21.45.8.2.3_221019	http://172.28.53.43:65000/5
CH6					172.28.53.31	255.255.255.000	80		38KQ Alarm	Private	00-23-43-9E-7B-D4	V31.35.8.2.3_221019	http://172.28.53.43:65000/6
CH7					172.28.53.29	255.255.255.000	80		QVC-IPC-2015(3.6)V3	Private	00-23-43-9E-7B-94	V31.35.8.2.3_221019	http://172.28.53.43:65000/7
CH8					172.28.53.30	255.255.255.000	80		IP CAMERA	Private	00-23-43-8B-E1-9D	V21.45.8.2.3_221019	http://172.28.53.43:65000/8
CH9					172.28.53.32	255.255.255.000	80		IP CAMERA	Private	00-23-43-8B-A1-E5	V31.35.8.2.3_221019	http://172.28.53.43:65000/9
CH10					172.28.53.33	255.255.255.000	80		IP CAMERA	Private	00-23-43-9E-11-7C	V31.35.8.2.3_221019	http://172.28.53.43:65000/10
CH11					172.28.54.21	255.255.255.000	9000		IP CAMERA	Private	00-23-43-6D-8A-31	V2.31.5.2_210304	

Note: This is not a universal feature for all IP cameras vary with models or firmware versions.

5.5.2. DDNS

This menu allows you to configure DDNS settings. The DDNS provides a static address to simplify remote connection to your NVR. To use the DDNS, you need to create an account on the web page of DDNS service provider firstly.

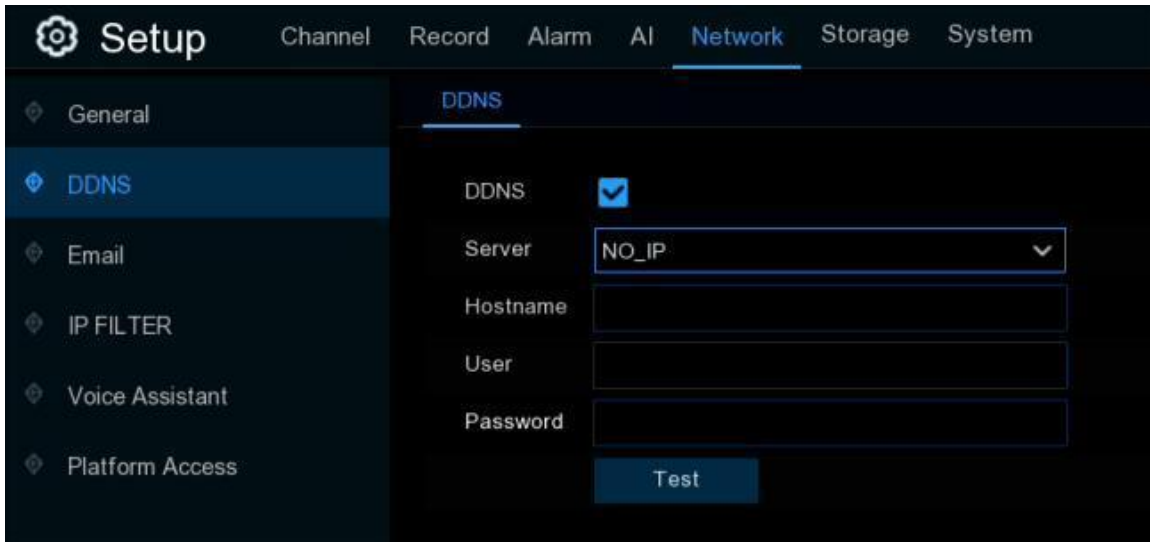

The screenshot shows the 'Setup' menu with the 'Network' tab selected. Under the 'Network' tab, the 'DDNS' sub-tab is active. On the left sidebar, the 'DDNS' option is highlighted. The main configuration area includes a 'DDNS' checkbox (checked), a 'Server' dropdown menu (set to 'NO_IP'), and input fields for 'Hostname', 'User', and 'Password'. A 'Test' button is located at the bottom right of the configuration area.

DDNS: Check to enable DDNS.


Server: Select the preferred DDNS server (DDNS_3322, DYNDNS, NO_IP, CHANGEIP, DNSEXIT).

Domain: Enter the domain name you created on the web page of DDNS service provider. This will be the address you type in the URL box when you want to connect remotely to the NVR via PC. For example: "nvr.no-ip.org".

User/Password: Enter the user's name and password you obtained when creating an account on the web page of DDNS service provider. After all parameters are entered, click **Test DDNS** to test the DDNS settings. If the test result is "Network is unreachable or DNS is incorrect", please check whether the network works fine, or the DDNS information is correct or not.

5.5.3. Email Settings

This menu allows you to configure the email settings. Please complete these settings if you want to receive the system notifications on your email when an alarm is triggered, HDD becomes full, HDD is in error state, or Video Loss occurs. Email is also important when you need to reset your password.

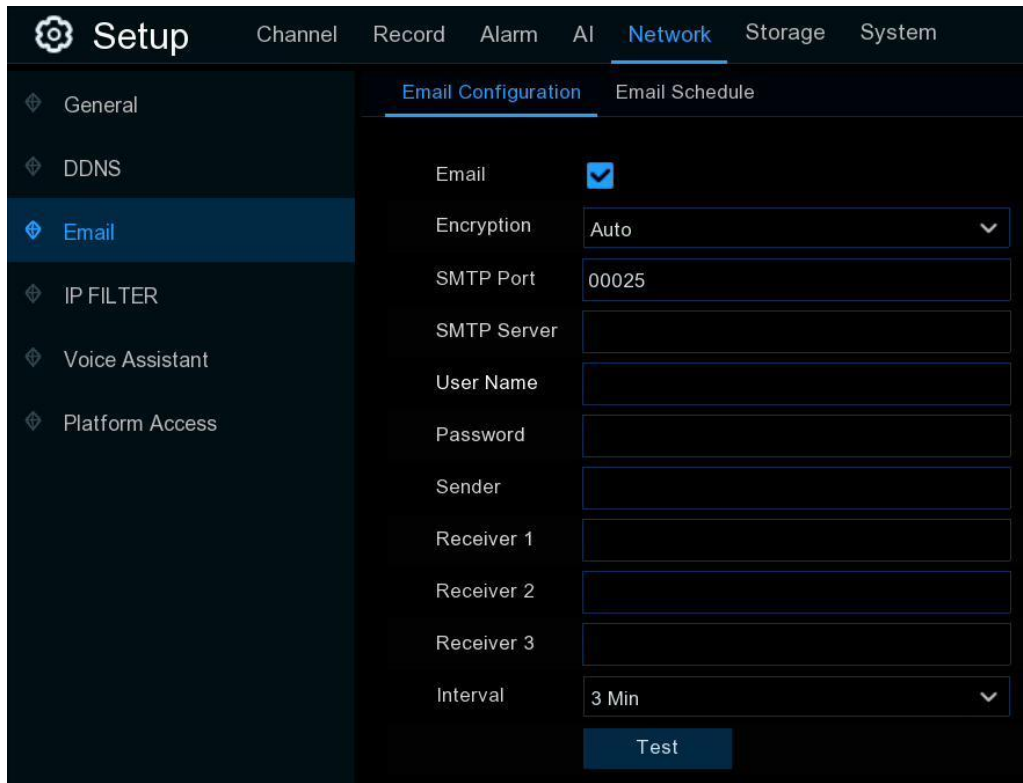


The screenshot shows the 'Setup' menu with the 'Network' tab selected. Under 'Network', the 'Email Configuration' sub-tab is active. The left sidebar lists various setup options: General, DDNS, Email (selected), IP FILTER, Voice Assistant, and Platform Access. The main configuration area for 'Email Configuration' includes the following fields:

- Email:** A checkbox that is checked.
- Encryption:** A dropdown menu set to 'Auto'.
- SMTP Port:** A text input field containing '00025'.
- SMTP Server:** An empty text input field.
- User Name:** An empty text input field.
- Password:** An empty text input field.
- Sender:** An empty text input field.
- Receiver 1:** An empty text input field.
- Receiver 2:** An empty text input field.
- Receiver 3:** An empty text input field.
- Interval:** A dropdown menu set to '3 Min'.

A 'Test' button is located at the bottom right of the configuration area.

5.5.3.1. Email Configuration

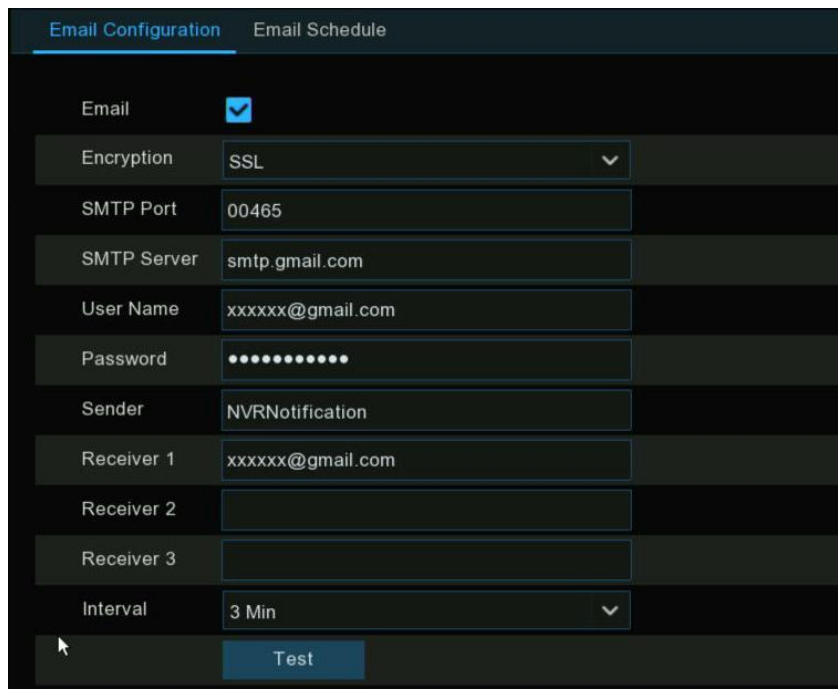

This screenshot provides a detailed view of the 'Email Configuration' form. The 'Email' checkbox is checked. The 'Encryption' dropdown is set to 'SSL'. The 'SMTP Port' is '00465'. The 'SMTP Server' is 'smtp.gmail.com'. The 'User Name' is 'xxxxxx@gmail.com'. The 'Password' field is masked with dots. The 'Sender' is 'NVRNotification'. The 'Receiver 1' is 'xxxxxx@gmail.com'. The 'Receiver 2' and 'Receiver 3' fields are empty. The 'Interval' is set to '3 Min'. A 'Test' button is at the bottom.

Field	Value
Email	☒
Encryption	SSL
SMTP Port	00465
SMTP Server	smtp.gmail.com
User Name	xxxxxx@gmail.com
Password	
Sender	NVRNotification
Receiver 1	xxxxxx@gmail.com
Receiver 2	
Receiver 3	
Interval	3 Min

Email: Click the checkbox to enable.

Encryption: Enable if your email server requires the SSL or TLS verification. If you are not sure, set to be **Auto**.

SMTP Port: Enter the SMTP port of your email server.

SMTP Server: Enter the SMTP server address of your email.

User Name: Enter your email address.

Password: Enter the password of your email.


Receiver 1~3: Input the email address(es) to send email alerts to.

Interval: This is the length of time that must elapse after your NVR sends an email alert before it will send another. Adjust accordingly.

To make sure all settings are correct, click **Test Email**. The system sends an automated email message to your inbox. If you received the test email, it means the configuration parameters are correct.

5.5.3.2. Email Schedule

If email alerts are enabled on your NVR, alerts would be emailed 24 hours as default. You can change the schedule when your NVR can send those alerts. For example, you may only want to receive alerts during the day but not in the evening. An alternative schedule can be created for each camera.

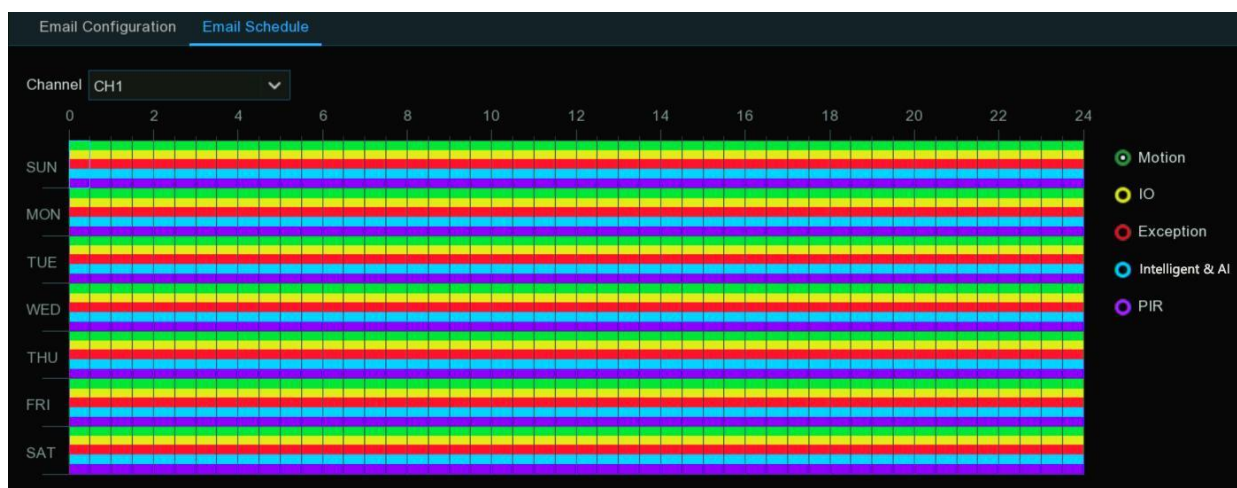


1. Select a channel you want to set the schedule.
2. Click on ratio button of the alarm type that you want to send email alerts for:
 - **Motion:** Email alerts for motion detection events
 - **IO:** Email alerts for I/O triggered events

- **Exception:** Email alerts for exception events which include no space left on the hard drive, a hard drive error or if one of the channels has lost the feed from its camera.
 - **Intelligent & AI:** Email alerts for Intelligent or AI detection events
 - **PIR:** Email alerts for PIR events
3. Using the mouse, click on a square to change or click and drag the mouse over the squares corresponding to your desired period
 4. Repeat step 2 & 3 to set the schedule for other alarm type.
 5. The set schedule is valid only for one channel. If you want to use the same recording schedule for other channels, use **Copy** function.
 6. Click **Apply** to save your settings.

5.5.4. IP FILTER

IP Filtering is a great way to limit access to your network devices for specific groups of IP addresses. For example, if you had a malicious user attacking your network, you could add a filter to prevent access to your devices from a single IP address or a block of IP addresses.

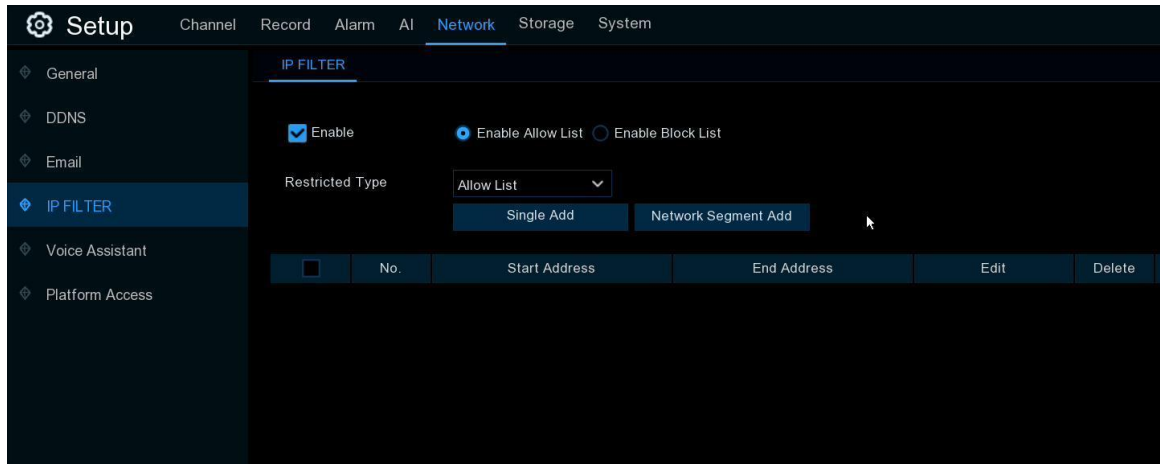

Allow List: It includes a range of IP addresses you define that indicates what IP addresses are allowed to access your NVR to prevent unauthorized IP addresses from logging into your NVR.


1. Tick the checkbox of Enable to activate the IP filter function.
2. Click on the radio button of "**Enable Allow List**".
3. Choose "**Allow List**" from "**Restricted Type**".
4. If you want to add individual IP address into the allow list, click "**Single IP Address**" to input the IP address. If you want to add a block of IP addresses, click "**IP Address Range**" to input the start IP address and end IP address. 5. Click **Save**. Only IP address(es) from the Allow List can access your NVR now.

Block List: It includes a range of IP addresses you define that indicates what IP addresses are forbidden to access your NVR to prevent unauthorized IP addresses from logging into your NVR.

1. Tick the checkbox of Enable to activate the IP filter function.
2. Click on the radio button of "**Enable Block List**".
3. Choose "**Block List**" from "**Restricted Type**".
4. If you want to add individual IP address into the allow list, click "**Single IP Address**" to input the IP address. If you want to add a block of IP addresses, click "**IP Address Range**" to input the start IP address and end IP address.
5. Click **Save**. IP address(es) from the Block List is forbidden to access your NVR now.


5.5.5. Voice Assistant

The voice assistant function allows to connect your NVR to your GoogleCast or Amazon Fire TV Stick, and cast the real-time surveillance images on your TV monitor by voice control.

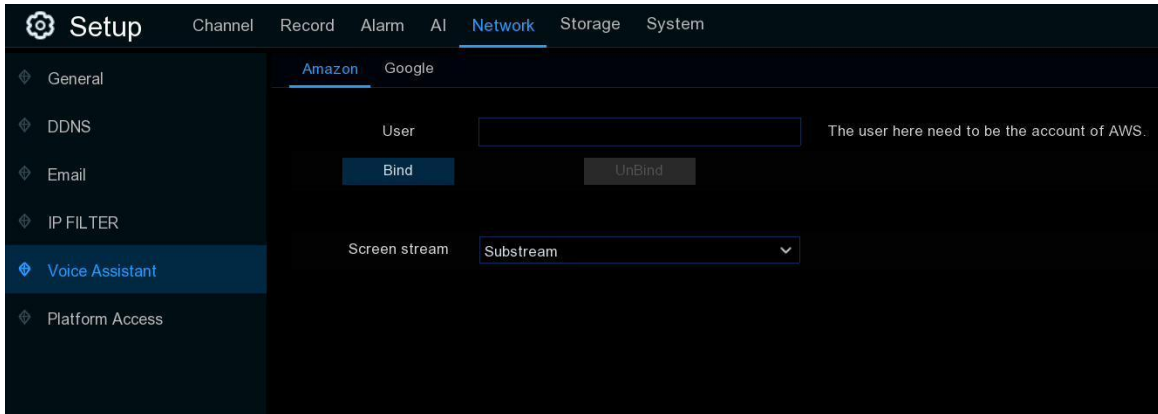


5.5.5.1. Voice Assistant with Amazon Fire TV Stick


1. Input your Amazon account, and the click "**Bind**" button to bind your Amazon account. Then choose the video stream you want to cast on your TV monitor.

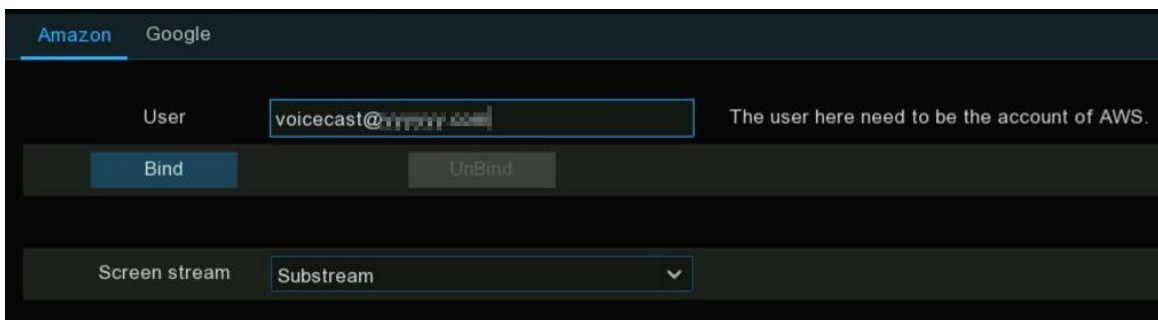


2. Go to Channel → Live menu, and give a Channel Name which is easy to call to the channel(s) you want to cast on your TV monitor.

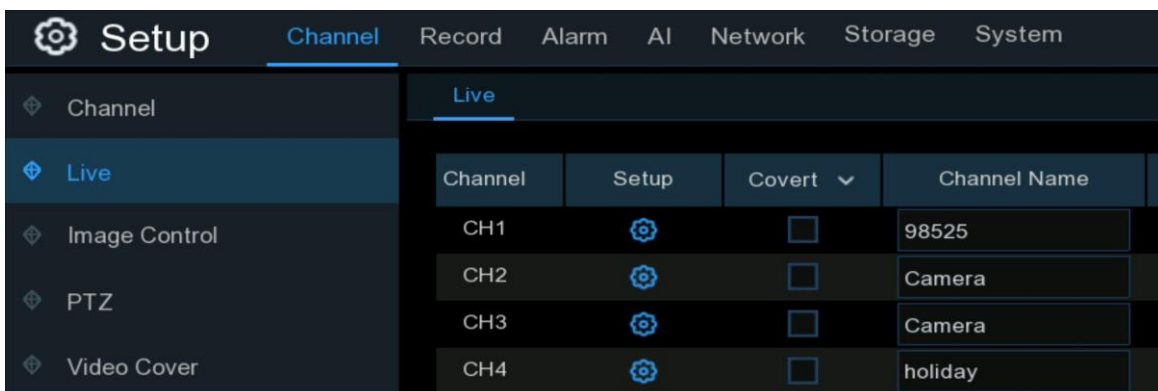


3. Connect the Fire TV Stick to your TV monitor, and power on it. Connect the Fire TV Stick to the Wi-Fi which is in the same LAN with your NVR.

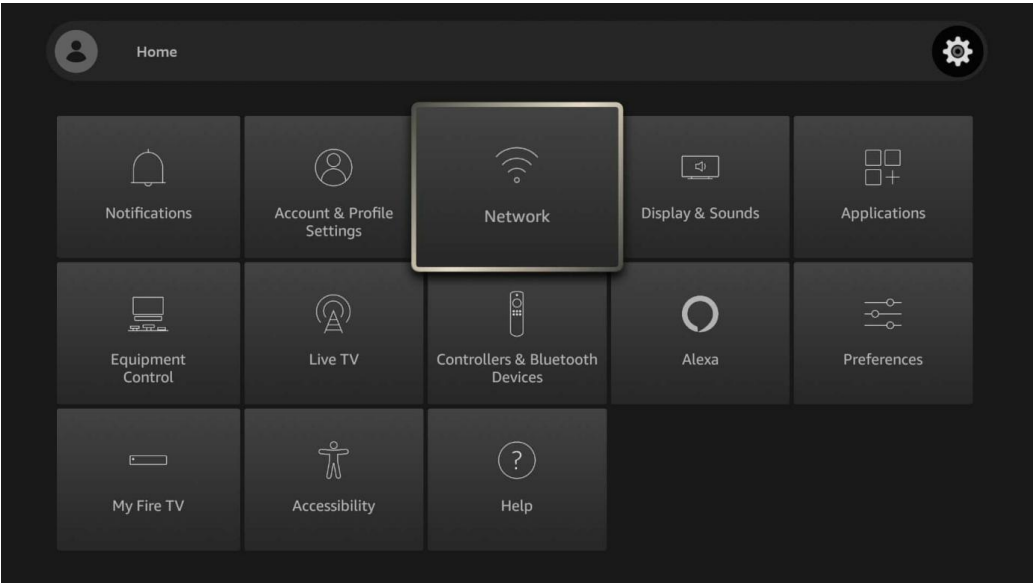

4. To use your existing profile or add a new profile and login your Amazon account which is same as the one you bind to the NVR.

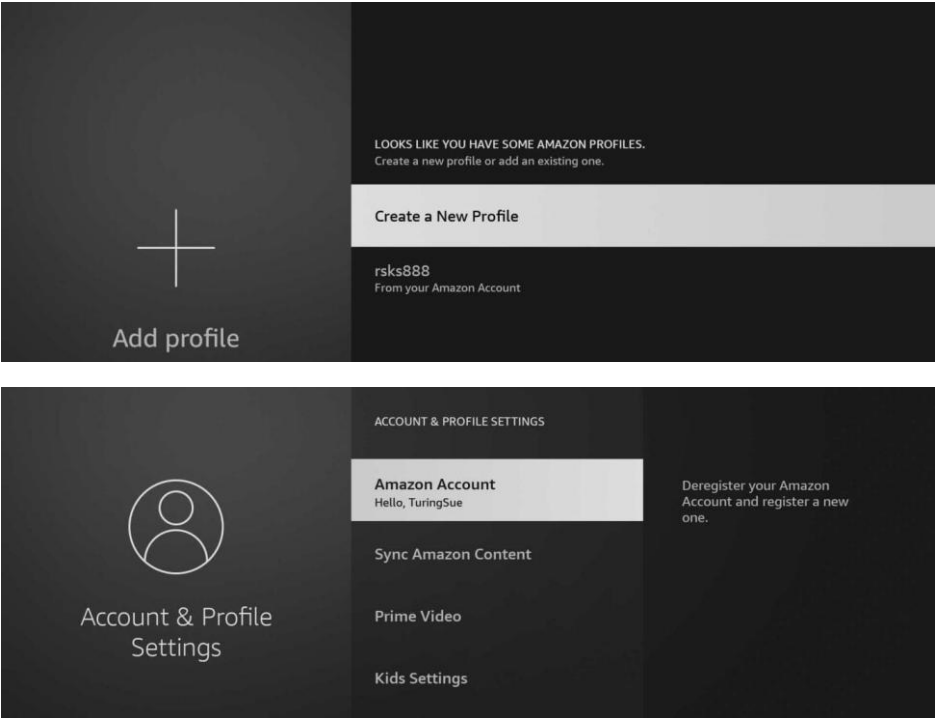

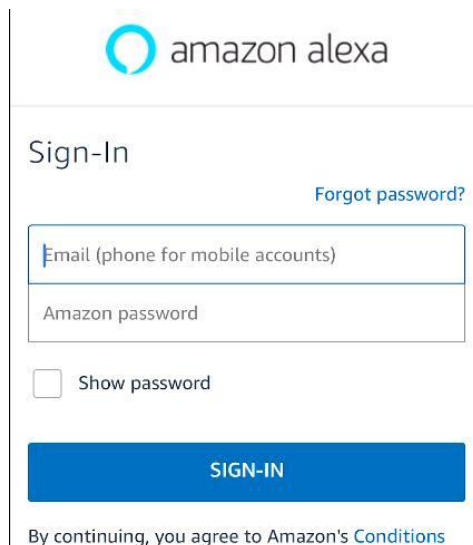

amazon alexa

Sign-In

[Forgot password?](#)

Email (phone for mobile accounts)


Amazon password

☐ Show password

SIGN-IN


By continuing, you agree to Amazon's [Conditions](#)

5. Search and install Amazon Alexa to your mobile phone from app store, and then login with the Amazon account which is same as the one you bind to the NVR.

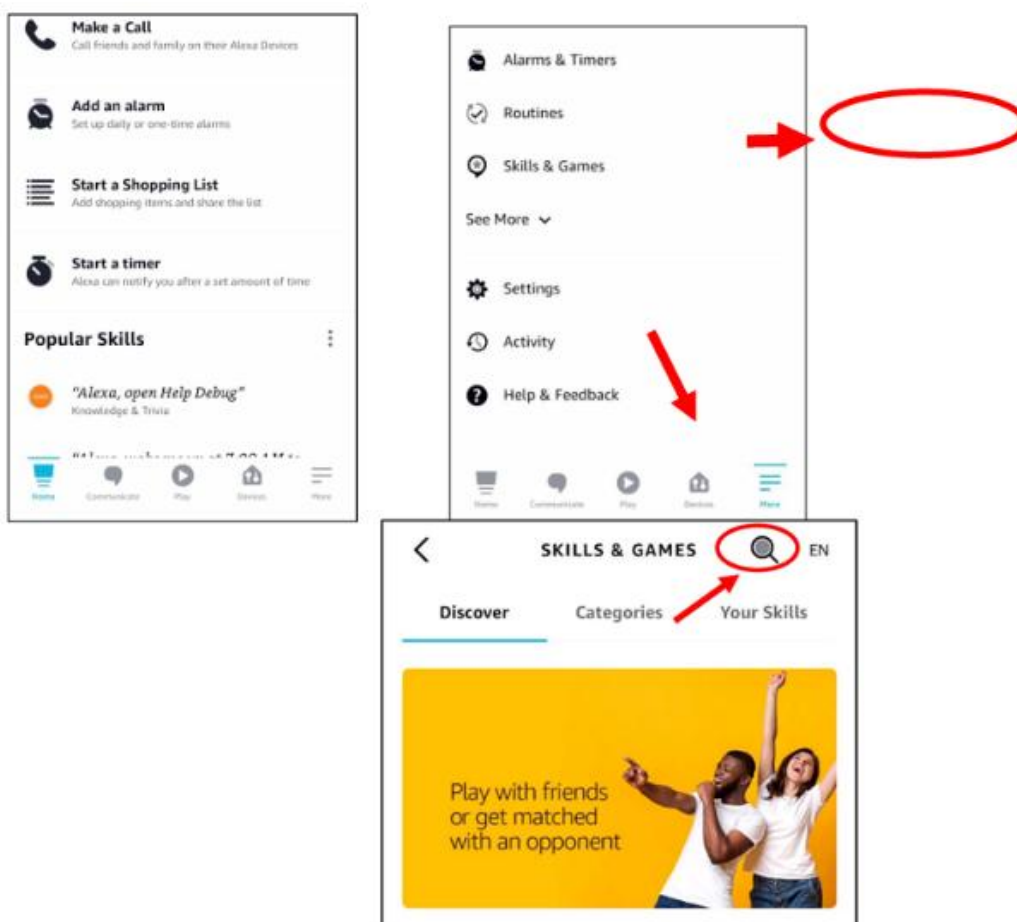


6. Touch "**More**", and then touch "**Skills & Games**".

7. Touch the search icon on the top right corner.

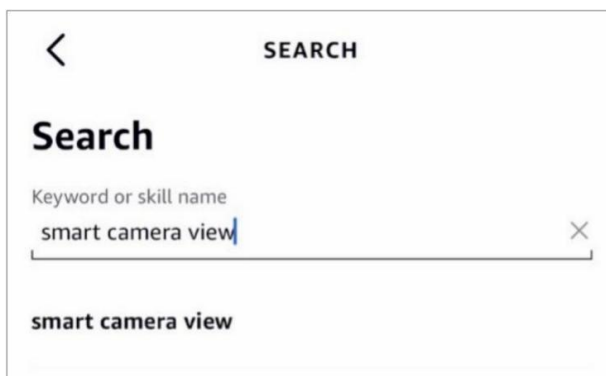


8. Input the keyword: smart camera view, and search.


9. Touch the "Smart Camera View" app in the search result list. And then Touch "ENABLE TO USE".

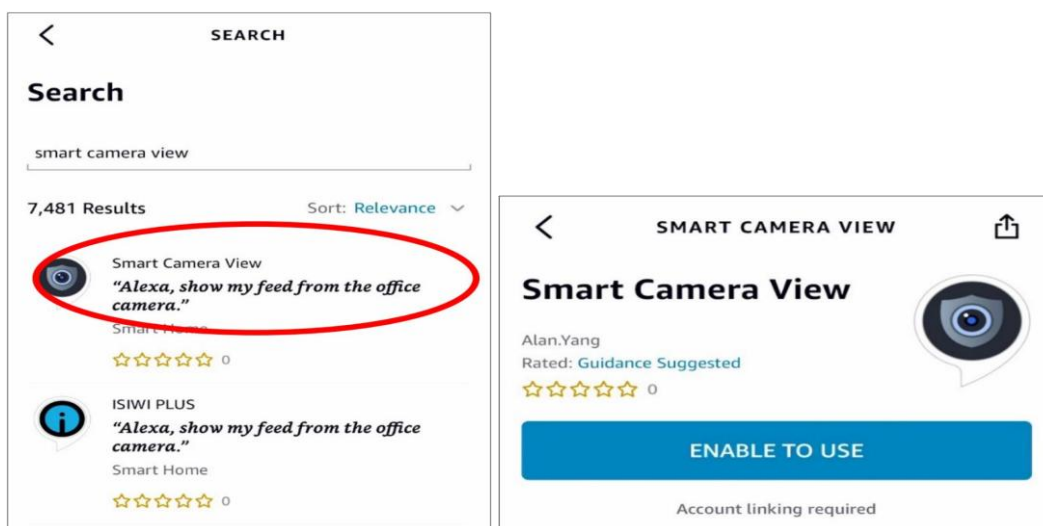


10. You would need to link your Amazon account. Sign in the Amazon account which is same as the one you bind to the NVR. Touch "Done" after the skill is successfully linked.

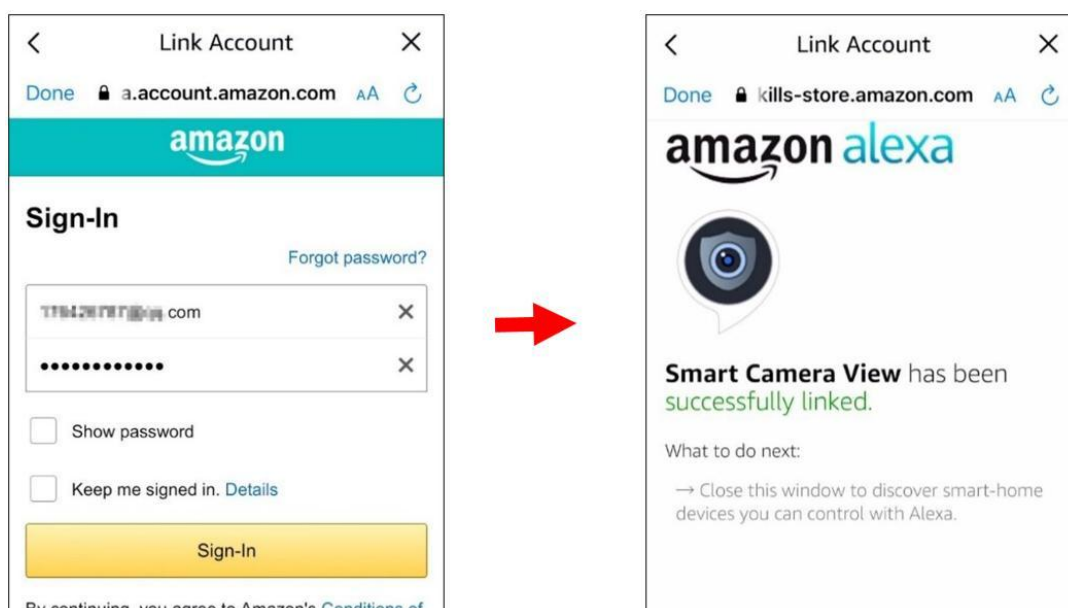


11. Touch "**DISCOVER DEVICES**" and wait a moment for the app to search the cameras. Touch "**Next**" when the devices were found and connected.

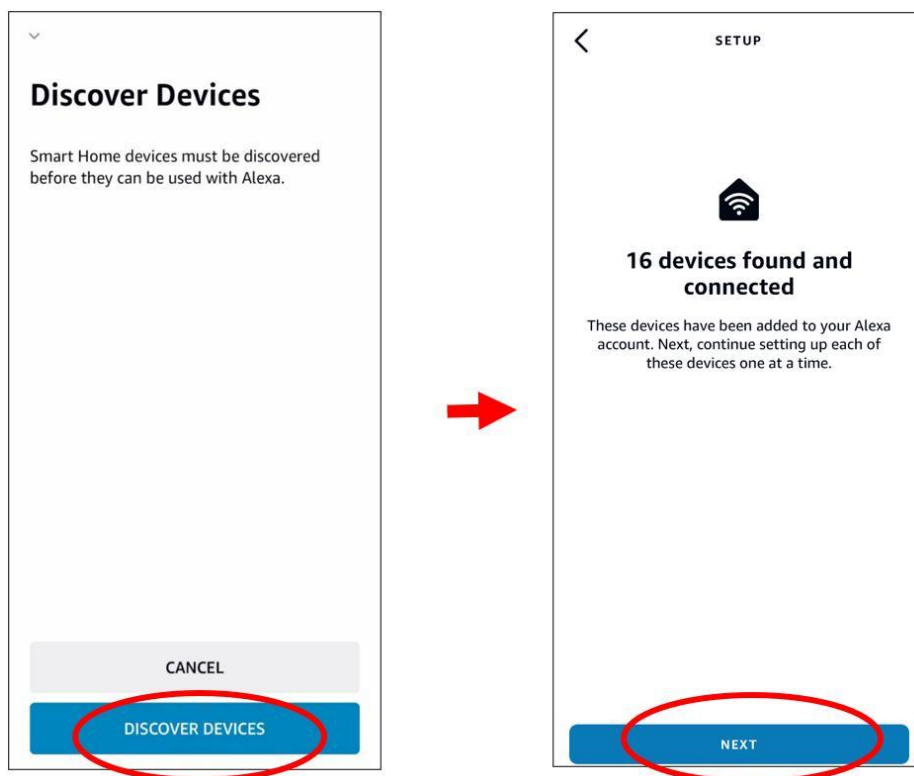



12. Choose one of the devices and then touch "**SET UP DEVICE**". You can add the camera to a group or skip.

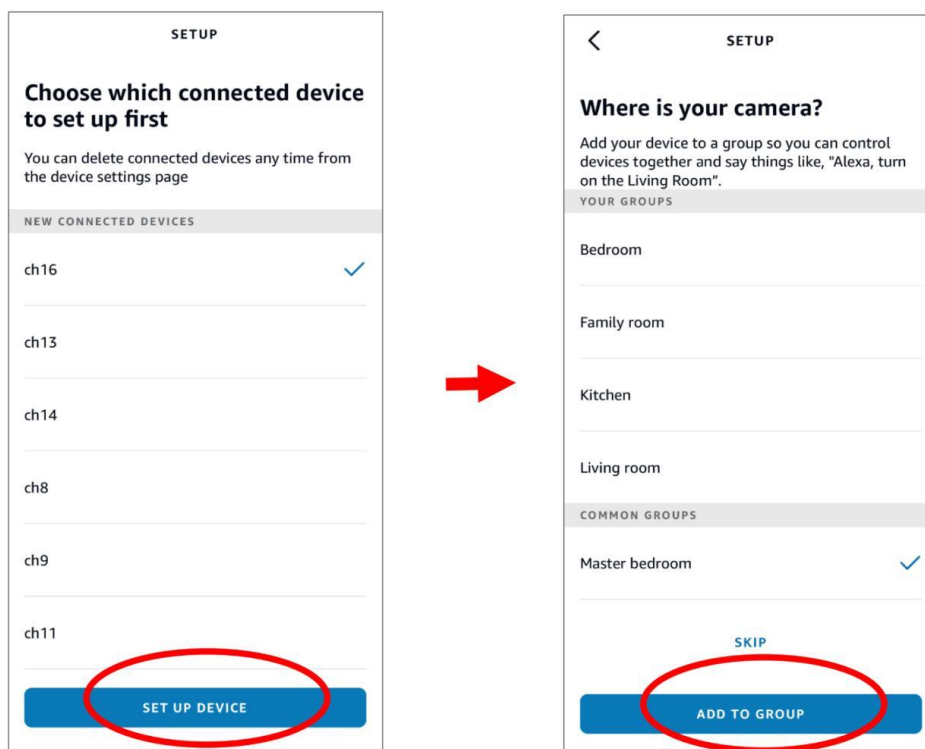

13. Repeat setup 12 to add all cameras and then touch "**Done**" to finish.


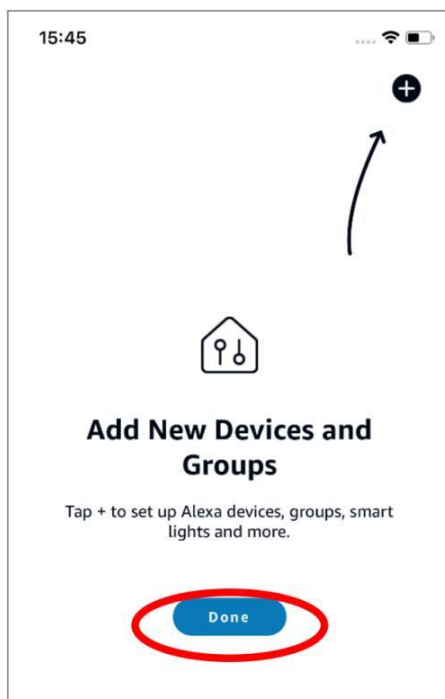


14. All added cameras will be listed in the Devices. Touch the "**Cameras**" icon to check all added cameras.

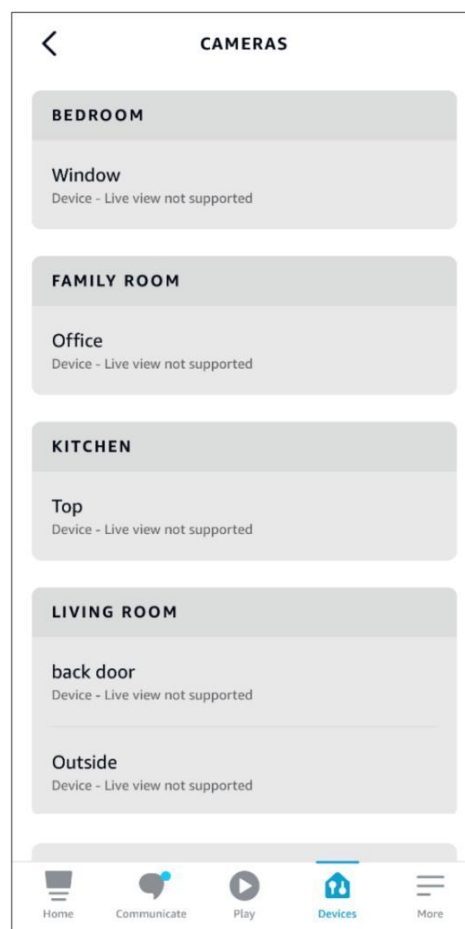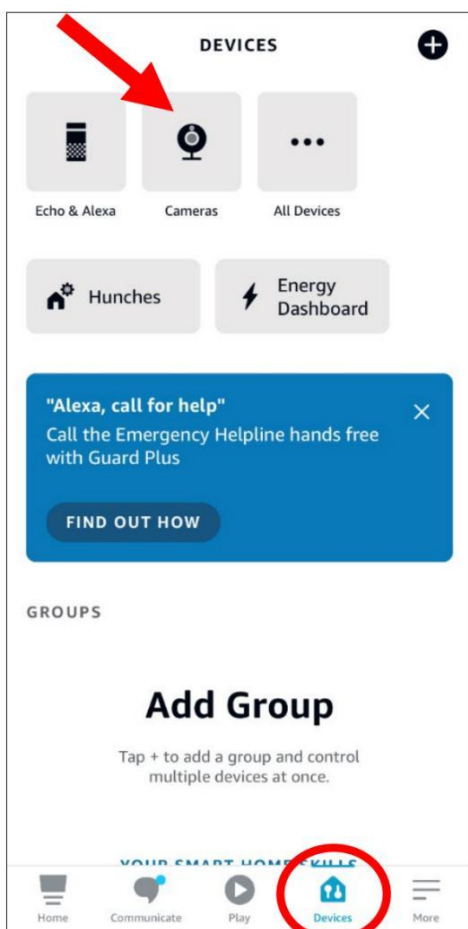

15. Press and hold on the voice button on the remote controller of the fire TV stick, and speak the command clearly. The command could be like: Show the XXX camera / Show XXX. XXX is the camera channel name. For example, if the channel name is "Office", you could speak "Show my office camera".

16. Wait for a while, you will see the real time images from the Office camera on your TV monitor.

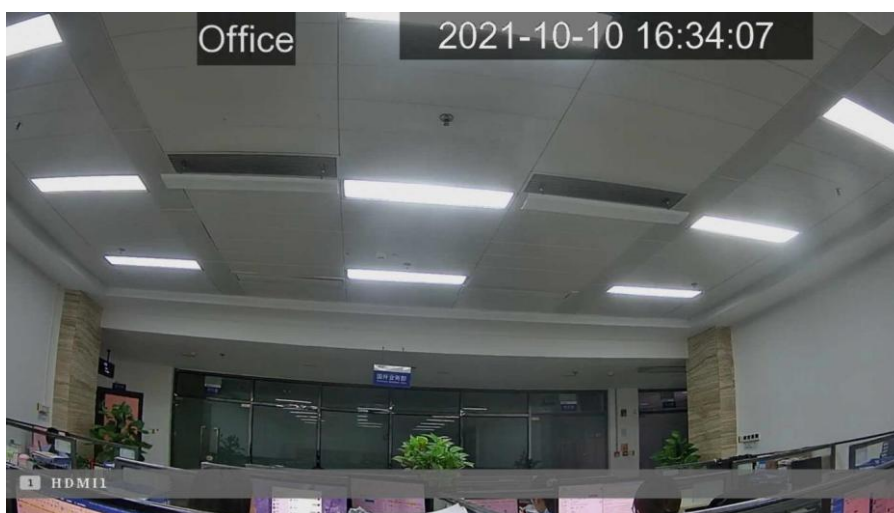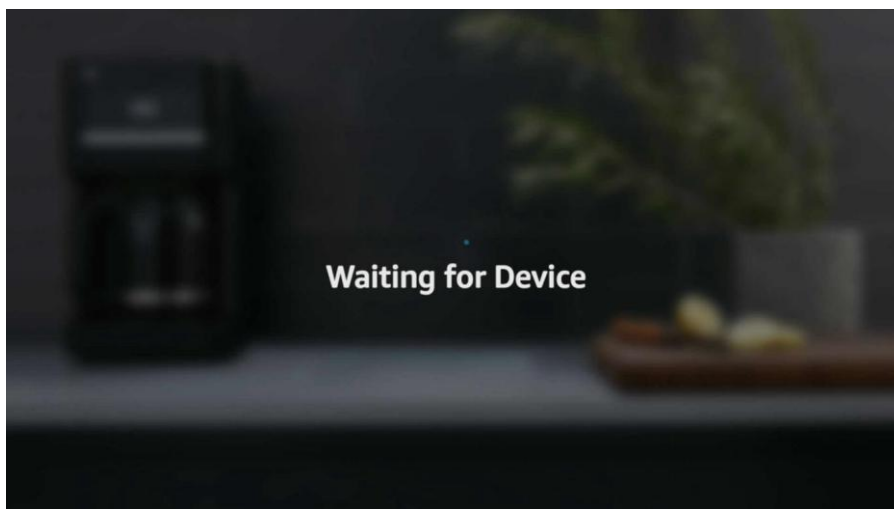


17. If you want to quit the camera live view, speak "Stop".


18. If you have changed the channel name, you would need to discover and add the camera again.

5.5.5.2. Voice Assistant with Google Chromecast

1. Input your Google account, and the click "**Bind**" button to connect to bind your Google account. To choose the video stream you want to cast on your TV monitor.

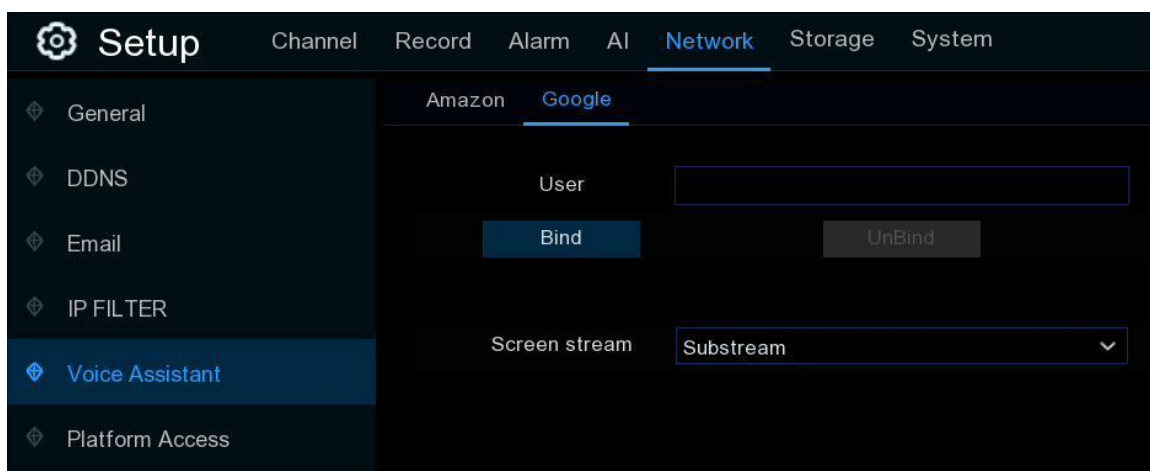


2. Go to Channel – Live menu, and give a Channel Name which is easy to call to the channel(s) you want to cast on your TV monitor.

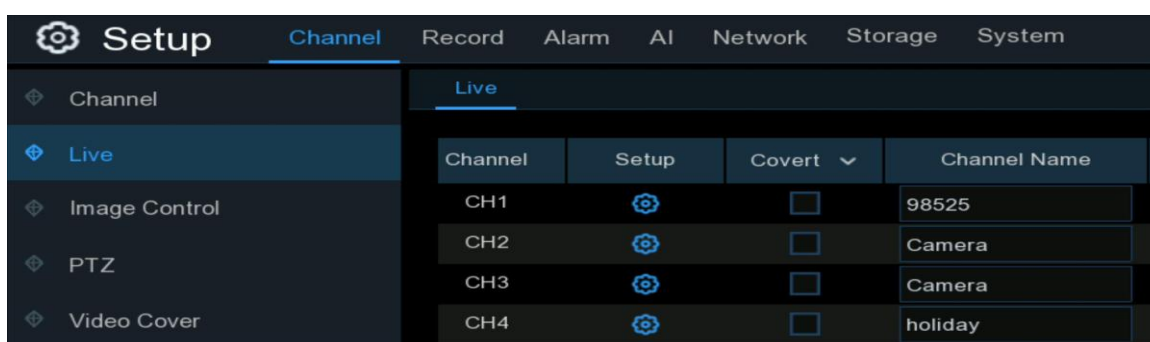


3. Connect the ChormeCast to your TV monitor, and power on it.

4. Search and install Google Home app to your mobile phone from app store. Run the installed Google Home app, touch "OK" to allow the app to use your local network and Bluetooth and then touch "Get Started".

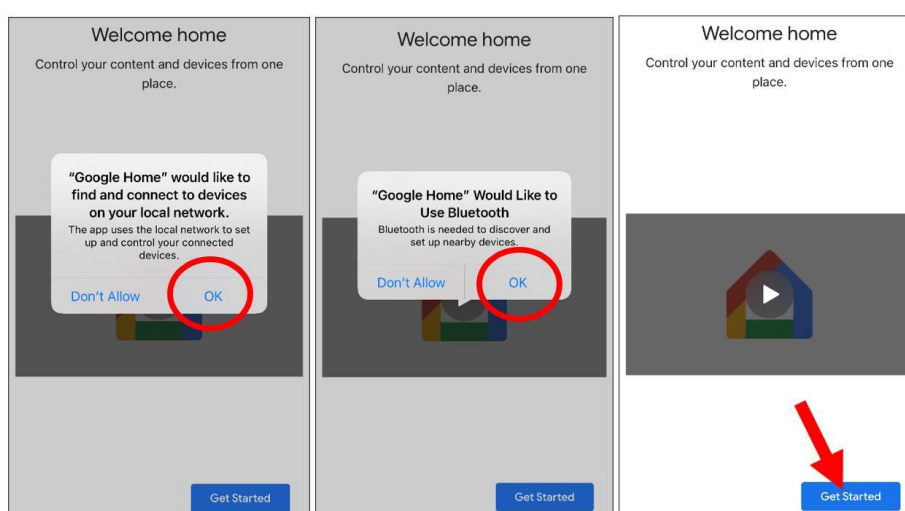


5. To login your Google account which is same as the one you bind to the NVR.

6. Touch "Get Started" to create a home, and then touch "New devices".

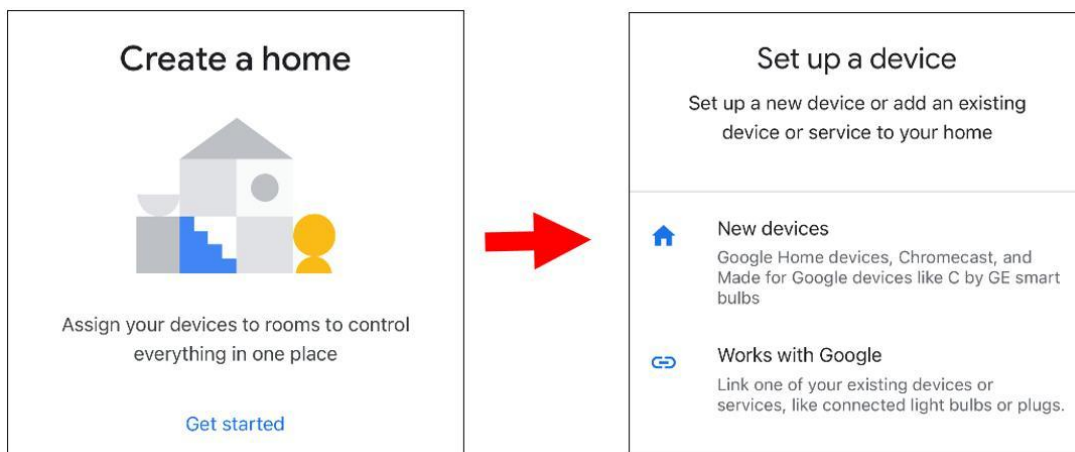


Input the Home nickname and address and then touch **"Next"**.


Input the Home nickname and address and then touch **"Next"**.

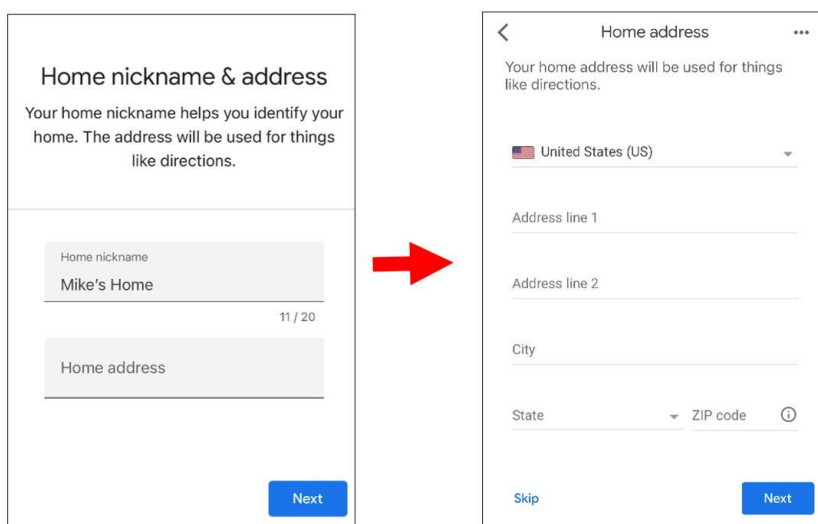


To allow location access for the app.

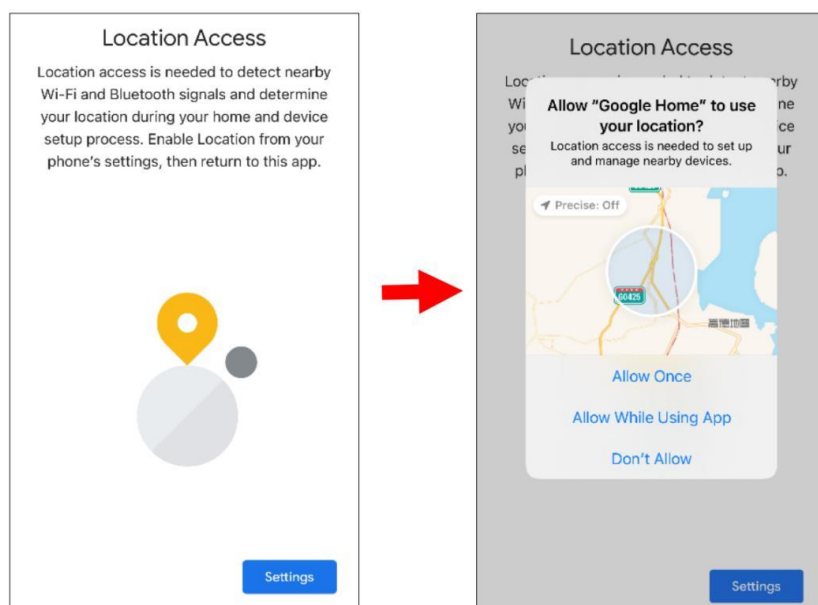


7. The app will automatically try to search devices from your local network. Choose Chromecast / Google TV. Make sure your Chromecast is turned on already, then touch **"Next"**.

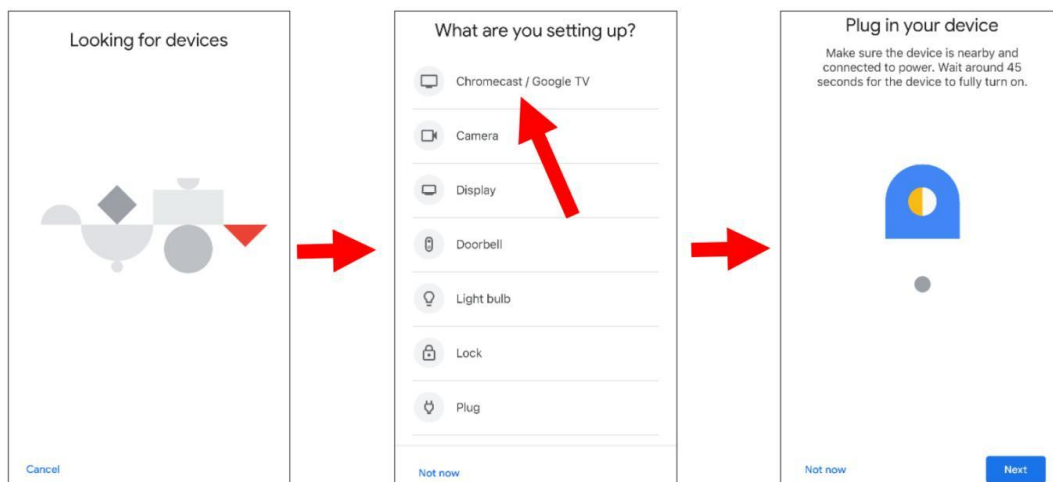


8. Your Chromecast will be found. Touch **"Next"** to connect. Confirm the code by touching **"Yes"**.

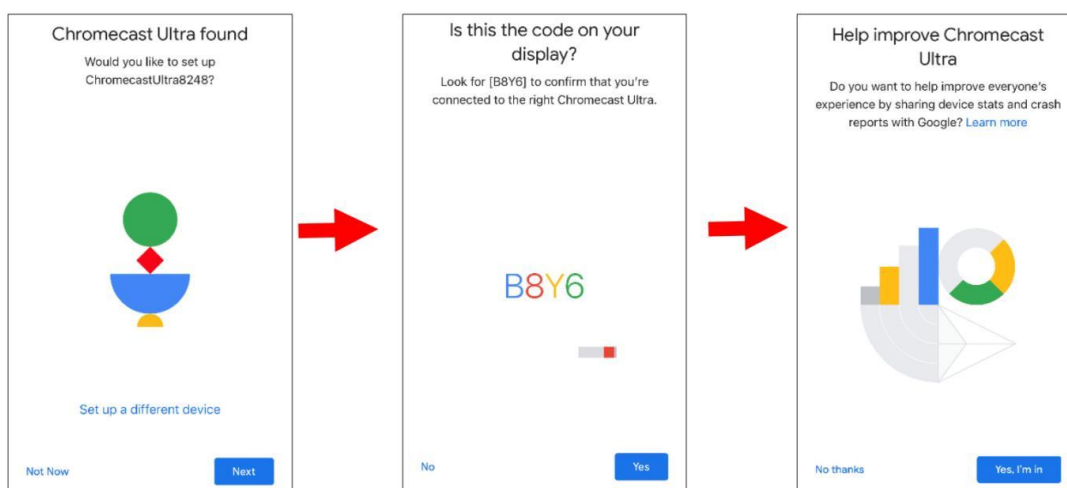


9. Choose a location for your Chromecast, then touch **"Next"**.

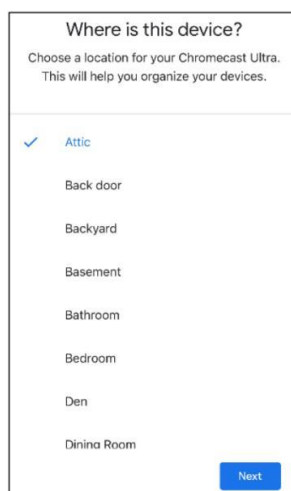


10. Choose the Wi-Fi network for your Chromecast and input the Wi-Fi password to connect. Make sure the Wi-Fi you choose is the same one with your mobile phone and is in the same local network with your NVR. Touch "**Continue**" to next step.

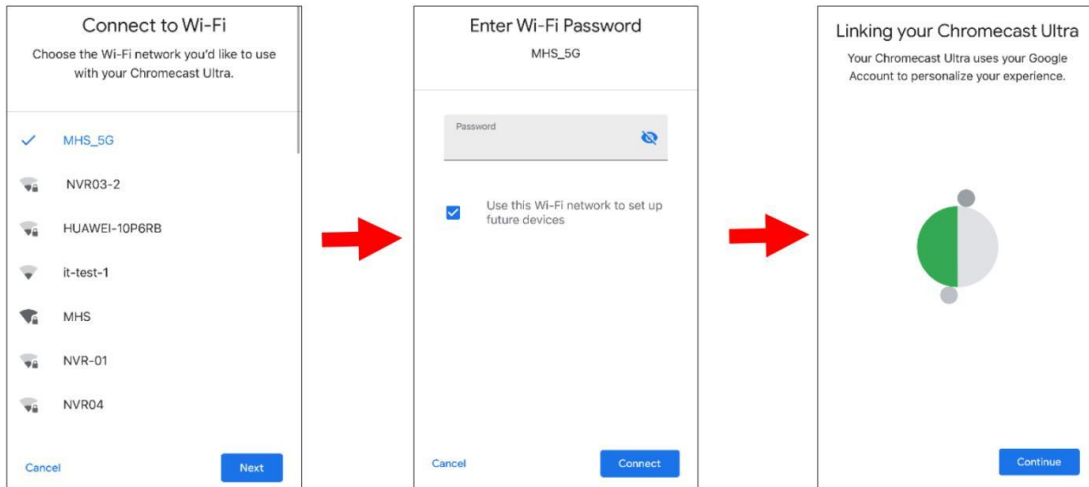


11. Touch "**No Thanks**", or "**Sign Up**" to login your google account. Touch "**Next**" and "**Skip Tutorial**", and then touch "**Finish Tutorial**".

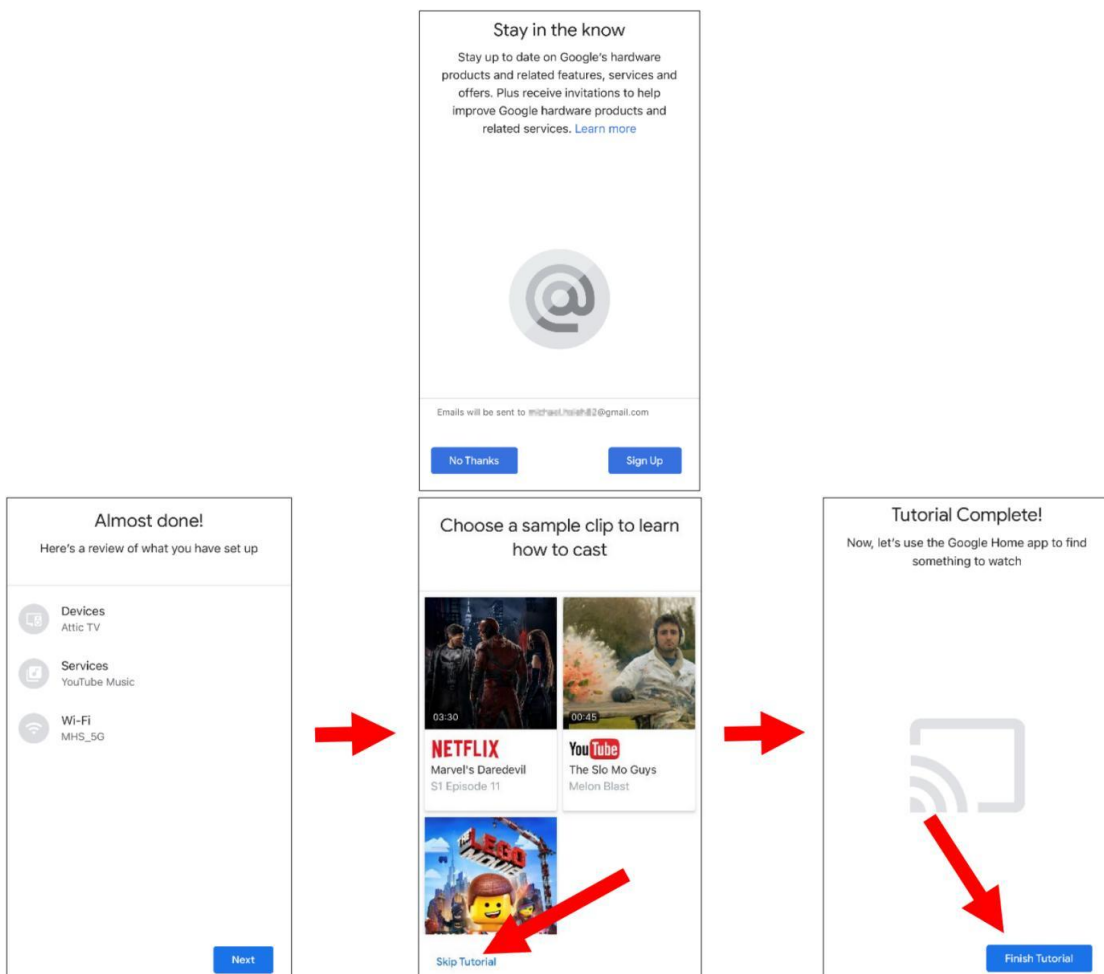


12. Now the Chromecast has been added to your Google Home. Touch the + icon on the left top corner. Indoor, then choose **"Set up device"**.

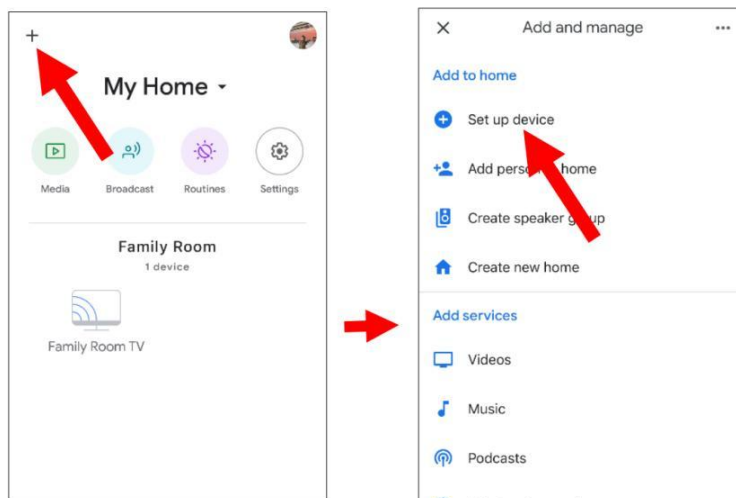


Choose **"Work with Google"**, touch the search icon on the right top corner and then input **"smart camera view"**.

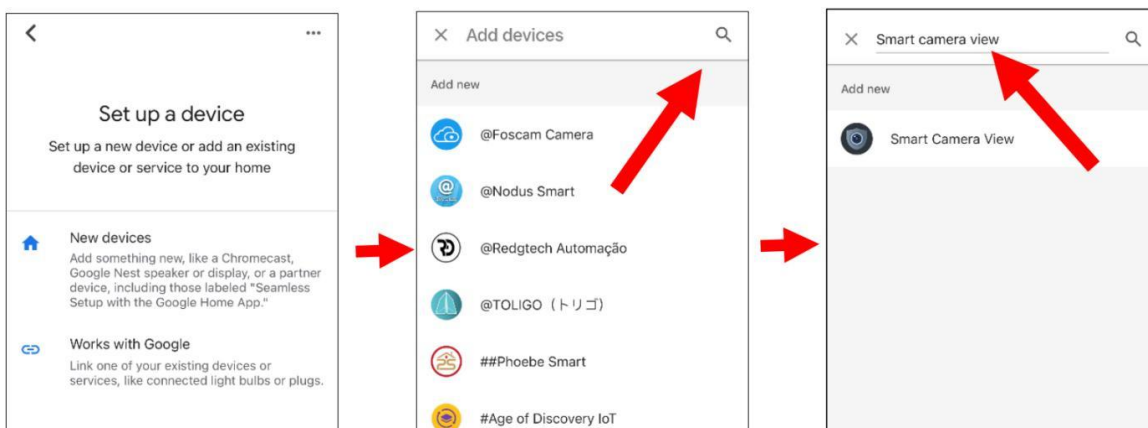


Touch on **"Smart Camera View"** in the search result. You would need to sign in your google account and allow the Google to access to your device.

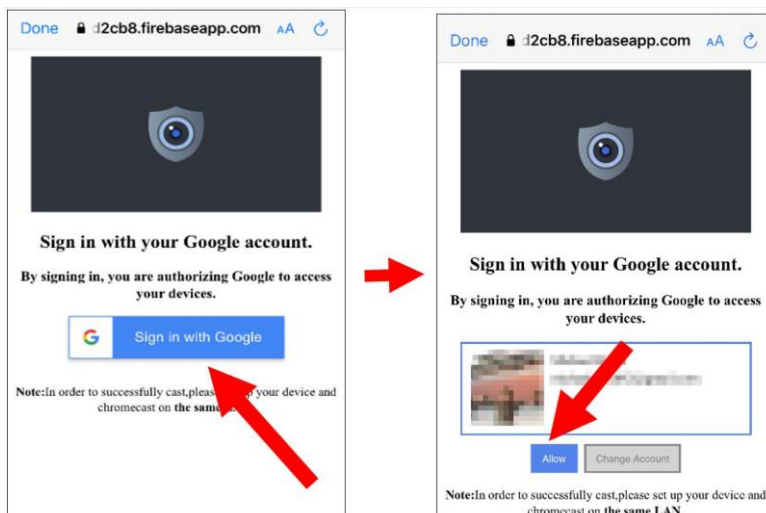

Wait for a while, the Smart Camera View application will be linked to the Google Home.

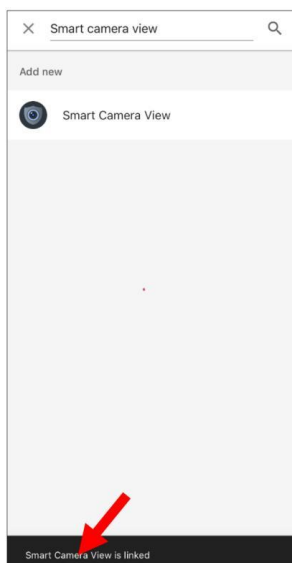


13. Now the available cameras in your NVR will be displayed. Choose one of the cameras and then touch "**Next**" button. Choose a home & location for the cameras step by step. Repeat this step to add all cameras.

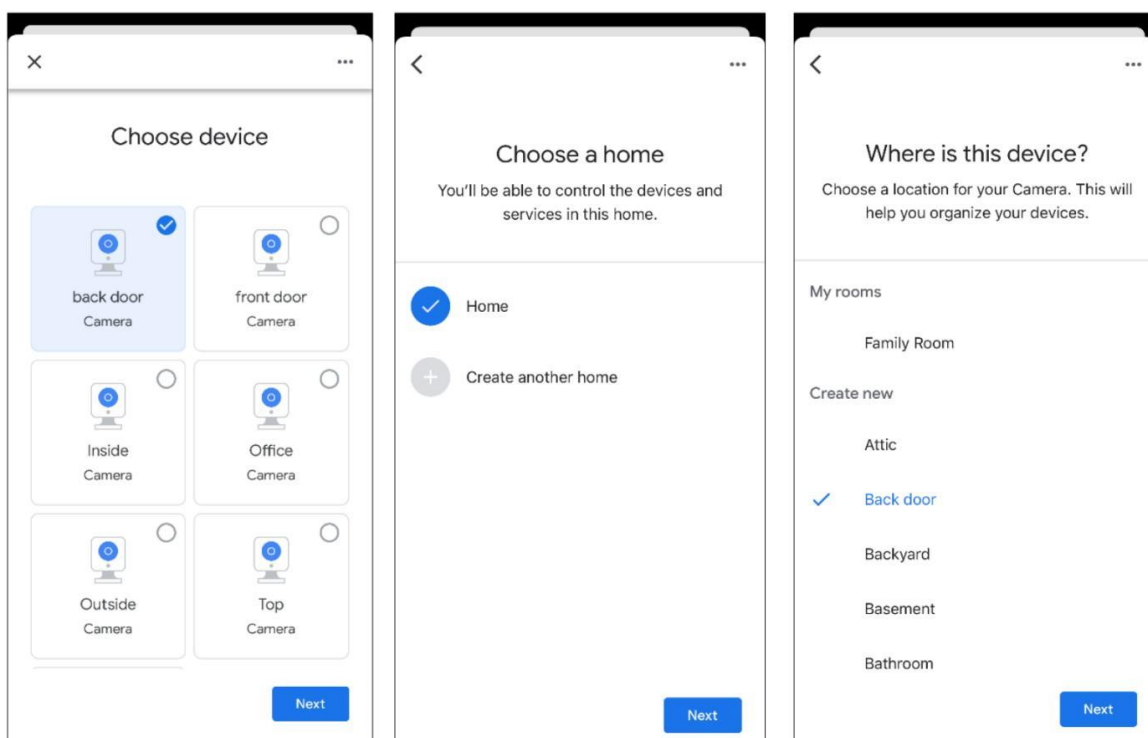

14. Search and install Google Assistant app to your mobile phone from app store.

15. Run the Google Assistant, login your google account which is same as the one you bind to the NVR.


16. Now, you're able to stream your camera to your TV monitor by using text or voice command, like "Show/play the *** Camera on XXX TV", in which *** is the channel name of the camera, XXX is your TV's name.

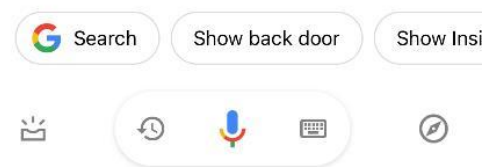

5.5.6. Platform Access

5.5.6.1 Onvif

This function is mainly used to connect 3rd party platform, like ECMS/NVMS via Onvif protocol.

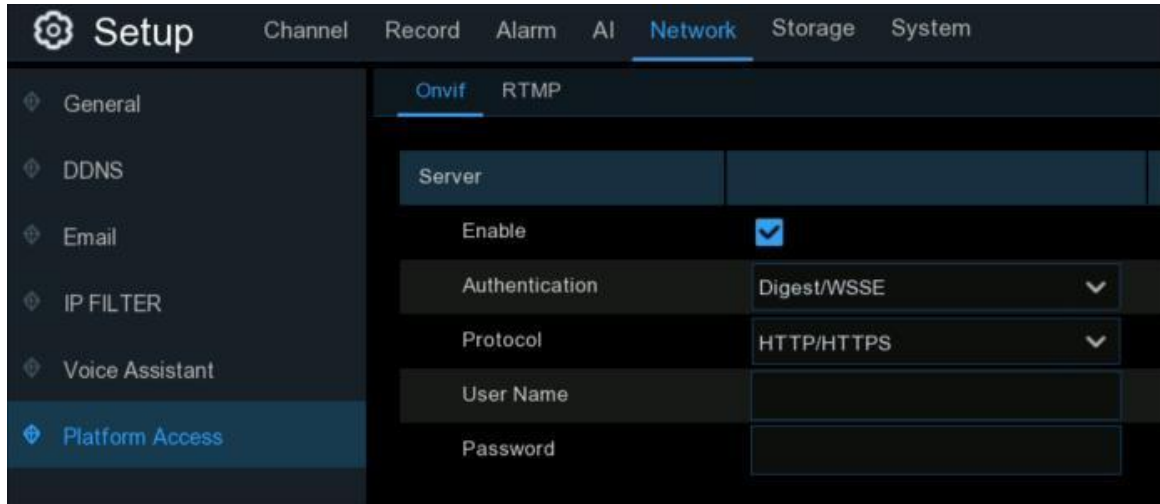

The screenshot shows the 'Setup' menu with 'Network' selected. Under 'Network', 'Onvif' is selected. The configuration fields are as follows:

Field	Value
Server	
Enable	☒
Authentication	Digest/WSSE
Protocol	HTTP/HTTPS
User Name	
Password	

Enable: Check to enable this function.

Authentication: Login authentication type, options including Digest_sha256, Digest, Digest/WSSE, WSSE and None. Choose one of them to match to your 3rd party platform.

Protocol: Choose http, https or both of them.



User Name: To set a user name for platform connection.

Password: To set a password for platform connection.

Note: Only images of Channel 1 will be displayed on the 3rd party platform.

5.5.6.2 RTMP

The audio and video streams of the NVR channels can be pushed to the YouTube website by RTMP for live broadcasting. To use this function, you need to do the following: Register a YouTube account, create a live streaming studio, set the URL and live code of the live streaming studio, set the live server address bar for the device, and enable and configure the code stream type and live broadcasting channels. After saving the configuration, you can go to the YouTube live room to refresh the page to watch live broadcasting.

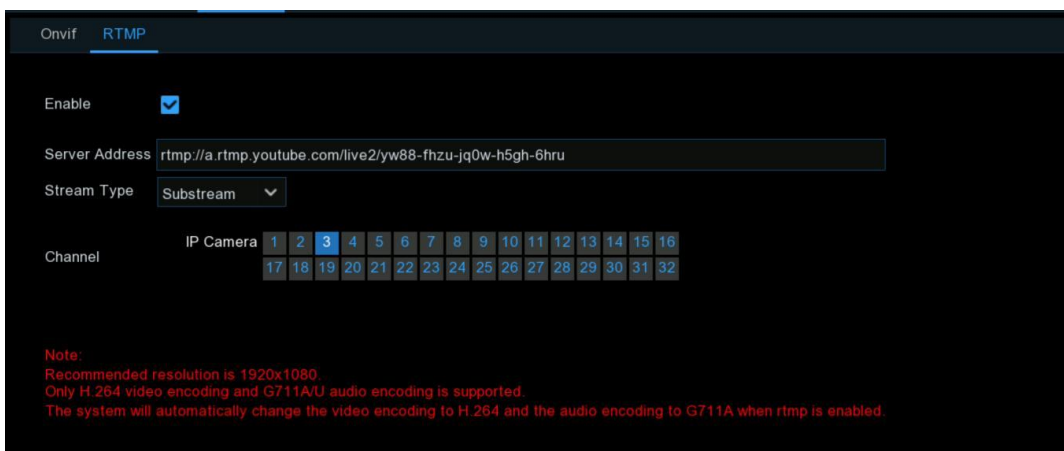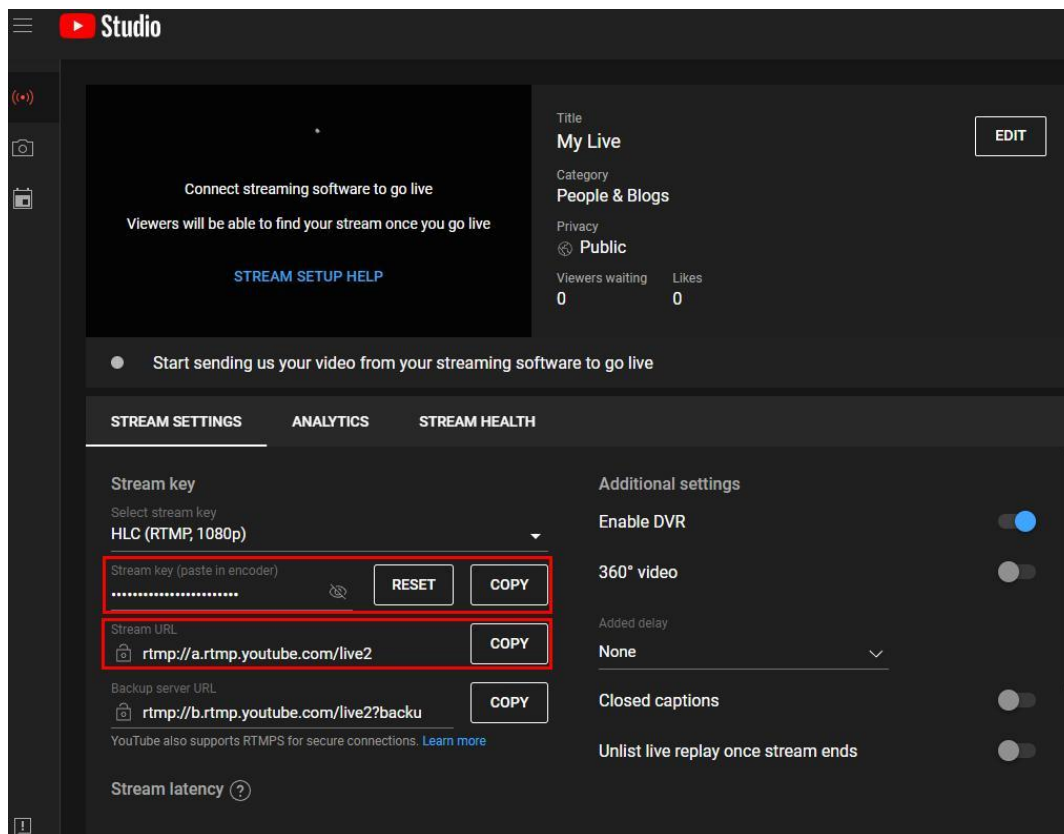

Enable: Used to set whether to enable the RTMP live broadcasting function.

Server Address: Enter the live broadcasting address and live code of the YouTube server.
(Note: "/" is used between the live broadcasting address and live code of the YouTube server.)

Stream Type: Select the stream type of the live broadcasting channel. Both the main stream and substreams are supported.

Channel: Select the channel for live broadcasting. Only one channel can be selected.


Note: To ensure the live broadcasting effect, it is recommended that the resolution of the stream not exceed 1920×1080 . Live broadcasting can be conducted for only the data streams of H.264 video encoding format and G711A/U audio encoding format. A YouTube live code can be set for only one device and cannot be reused.

5.6. Device

In this section, you can configure the storage devices, including the internal HDD storage and external NAS storage & cloud storage.

5.6.1. HDD

This function gives you the option of formatting your NVR's hard drive, and it will be listed here for selection (if a new hard drive has been installed inside your NVR, you need to format the drive before it can be used).

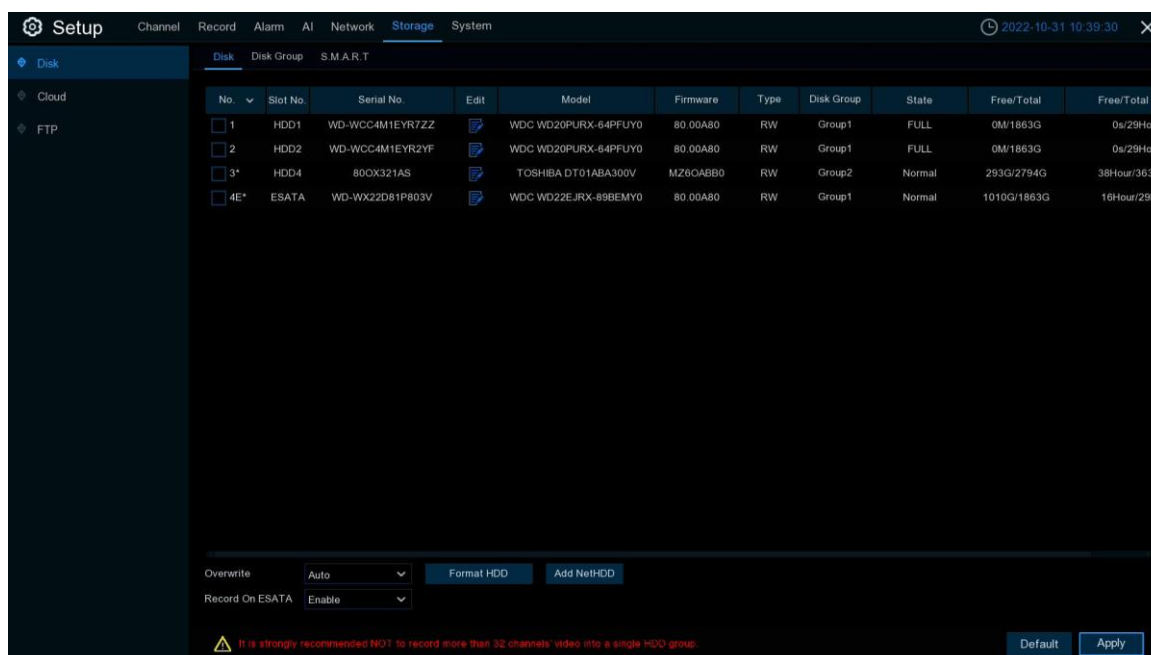

Format HDD: Click the checkbox to select the hard drive then click this button to format. You have three options to select from:

- Format the entire hard disk. All data will be erased: As stated, all data including events, log files and analytic information will be erased.
- Only format the record partition. All record data will be erased: Only data such as videos, snapshots and log files will be erased. All analytic information will be kept.
- Only format the general partition. All AI related data may be erased: Only analytic information will be erased. Videos, snapshots and log files will be kept on the hard drive.


Select the relevant option, then click "**OK**". Input your password, then click "**Authenticate**". A message will appear noting the data that will be erased. Click "**OK**" to continue.

Overwrite: This instructs your NVR to overwrite the oldest video files as the hard drive becomes full. You also have the option of selecting the amount of days for recordings to be kept before they are overwritten. For example, if you choose the option 7 days then only the last 7 days' recordings are kept on the HDD. To prevent overwriting any old recordings, select **OFF**. If you have set Off on this feature, please check the HDD status regularly to make sure the HDD is not full. Recording will

be stopped if HDD is full. We recommended leaving the **Auto** selection as this prevents your NVR from running out of storage space.

Record on ESATA: This menu only displayed when your NVR is coming with an e-SATA port on the rear panel and your e-SATA HDD has been connected to the NVR already. It will allow to record the video to external e-SATA HDD to enhance your HDD capacity. If the e-SATA recording function is enabled, e-SATA backup function will be disabled.

Add NAS HDD: To add your NAS disk.

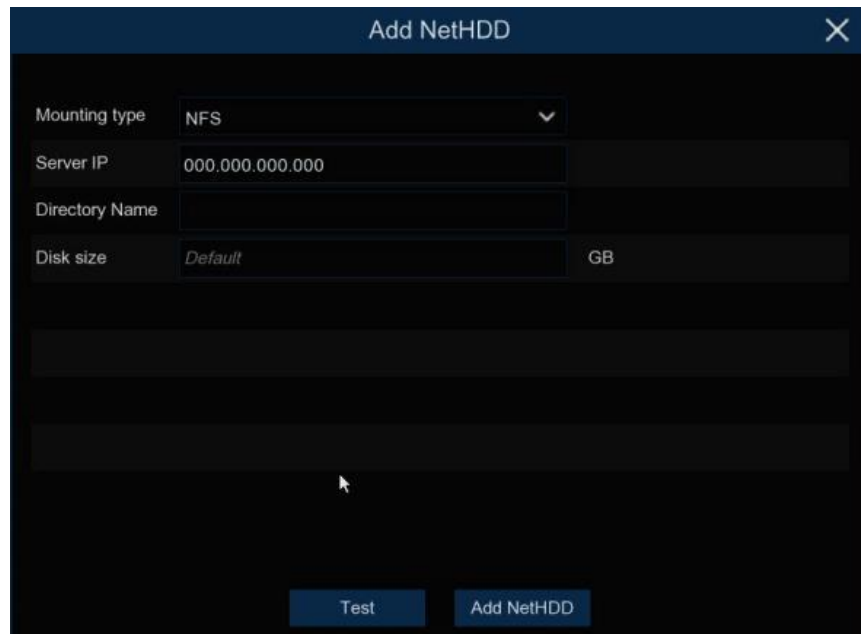

Mounting Type: To choose the mounting type from NFS and SMB/CIFS. You would need to input the account name and password of NAS if you choose SMB/CIFS.

Server IP: IP the IP address of NAS storage.

Directory Name: Input the directory name on which you want to save your recording data.

Disk Size: To set the capacity size of the NAS storage.

Test: Click to test the connection of NAS storage.

Add NAS HDD: Click to add NAS storage.

If your NVR supports to install multiple hard disks and more than 1 hard disk is installed in your NVR, the edit button will be appear in your system, you can click it to edit the HDD as below:

Disk Type: You can set the hard disk to be Read Write, Read Only, or Redundant.

HDD ID:	Disk 1
Disk Type	Read Write Disk
Disk Group	Record Disk Group 1

Read Write mode is the normal status for an HDD to save recordings or search recordings to play. If all the installed hard disks are set to Read Write mode, the NVR will save recordings to the hard disks sequentially. To prevent important video data from being overwritten during cyclic recording, the hard drive disk can be set as **Read Only** mode. New recordings will be not able to save into this read only disk. You can still search recording from this read only disk to play.

Redundant hard disk can be used to save the recordings same as what is saved to Read Write hard disk(s). When a redundant disk is set, the system can save recording in parallel to both the Read Write hard disk and the redundant hard disk in case of hard disk failure.

Note: 1. Redundant disk supports to save mainstream recording only. 2. If the disk type has been changed, the hard disks might be unmounted and offline. Please wait a while till the hard disks get mounted again.

Disk Group: You can set the disks into different disk group for recording. See more on **5.6.1.1 Disk Group**.

5.6.1.1 Disk Group

If your NVR supports to install multiple hard disks and more than 1 hard disk is installed in your NVR, you will see this menu. With Disk Group function, you can assign different cameras to be recorded into different groups in order to reduce the loading on a single hard disk and extend the life of hard disk.

Disk	Disk Group	S.M.A.R.T														
Disk Group Type	Record Disk Group															
Disk Group	Record Disk Group 1															
Record Channel																
IP Camera	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64


1. On the Disk list page, click on the edit button of the hard disk you want to configure, and then select its Disk Type and Disk Group.

2. Go back to Disk Group page, choose a Disk Group Type. If all the hard disks are set as Read Write mode, only Record Disk Group available to choose here. If one or more hard disks are set as Redundant mode, Redundant Disk Group will be available to choose here.
3. Choose the Disk Group.
4. Select the Record Channel. It indicates which camera(s) will be recorded and saved into the hard disk(s) in the selected group.
5. Click **Apply** to save your settings.

Note: There will be a prompt for models with more than 32 channels. It is recommended that the video channel configuration of a single disk group should not exceed 32 channels

5.6.1.2. S.M.A.R.T

This function is used to display technical information on the hard drive installed inside your NVR. You can also perform a test (there are three types available) to evaluate and detect potential drive errors.

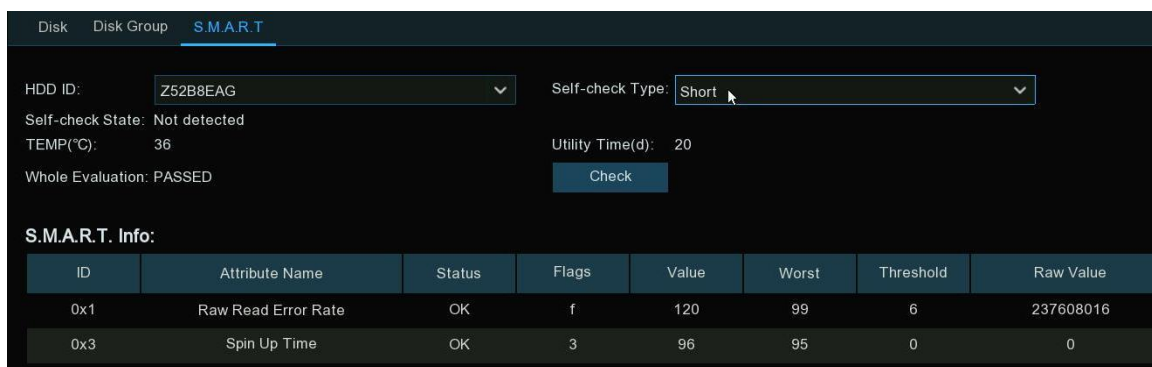

Disk Disk Group **S.M.A.R.T**

HDD ID: Self-check Type:

Self-check State: Not detected Utility Time(d): 20

TEMP(°C): 36 Whole Evaluation: PASSED

S.M.A.R.T. Info:

ID	Attribute Name	Status	Flags	Value	Worst	Threshold	Raw Value
0x1	Raw Read Error Rate	OK	f	120	99	6	237608016
0x3	Spin Up Time	OK	3	96	95	0	0

Self-check Type: There are three types available:

- **Short:** This test verifies major components of the hard drive such as read/ write heads, electronics and internal memory.
- **Long:** This is a longer test that verifies the above as well as performing a surface scan to reveal problematic areas (if any) and forces bad sector relocation.
- **Conveyance:** This is a very quick test that verifies the mechanical parts of the hard drive are working.

When performing a test, your NVR will continue to work as normal. If an HDD S.M.A.R.T error found, the HDD can be continued to use, but there will be a risk to lose recording data. It is recommended to replace a new HDD.


5.6.1.3 RAID

The RAID function has a high requirement on hard disk performance. To ensure long-term stable operation and reliability of RAID, it is recommended that you use enterprise-class hard disks (including brand, model, and capacity) for RAID creation and other configurations. If surveillance-class or desktop-class hard disks are used, data security may be affected. The

company shall not be liable for the data loss or data damage caused thereby. Currently, only the 8-bay and 16-bay models support the RAID function.

5.6.1.3.1. Enabling RAID

Choose **Main Menu > System > General** to open the general setting page. Select **Enable Raid** to enable the RAID function, and then save the configuration. The configuration will take effect after the system is restarted.

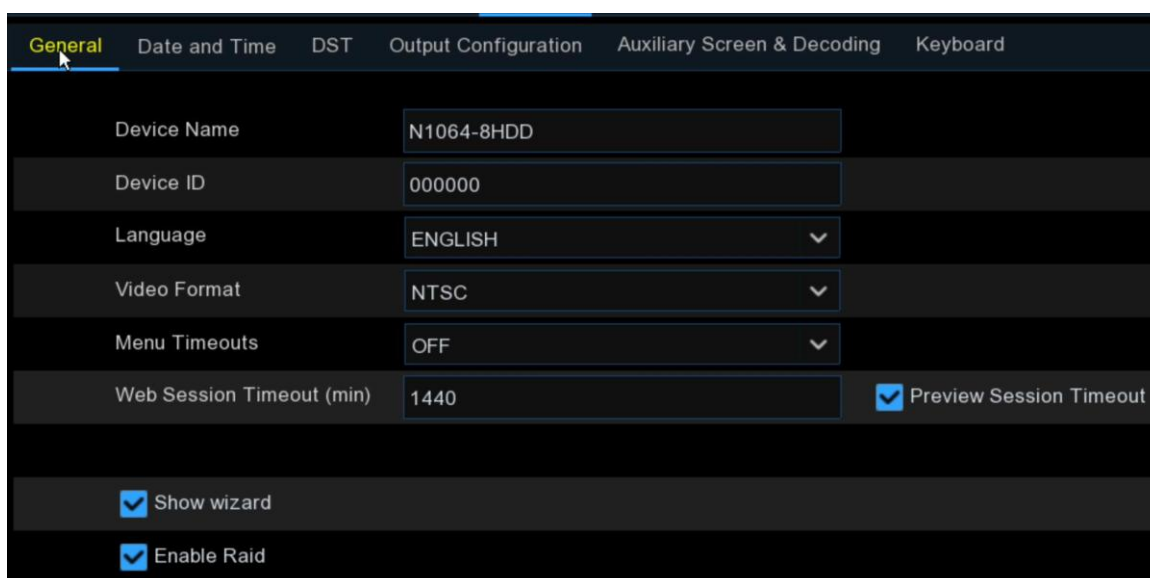

Setting	Value
Device Name	N1064-8HDD
Device ID	000000
Language	ENGLISH
Video Format	NTSC
Menu Timeouts	OFF
Web Session Timeout (min)	1440
Preview Session Timeout	☒
Show wizard	☒
Enable Raid	☒

Note: After the RAID function is enabled, the NVR does not support ESATA and NAS.

5.6.1.3.2. Creating RAID

You can create RAID either in one click or manually. For one-click creation, RAID5 is created by default. For manual creation, RAID0, RAID1, RAID5, RAID6, and RAID10 are supported. You can create different types of RAID in accordance with the actual number of hard disks to be accessed.

RAID Type	Hard Disk Quantity
RAID0	≥ 2
RAID1	2
RAID5	≥ 3
RAID6	≥ 4
RAID10	4 or 8

Note: The capacity of a single hard disk used for RAID creation is not less than 4 TB. For an installed hard disk with a capacity less than 4 TB, it cannot be selected for RAID creation.

(1) Automatic RAID Creation

Through one-click configuration, the device can quickly create RAID and virtual disks. RAID5 is created by default in one-click configuration, and at least four hard disks should be installed.


Disk S.M.A.R.T RAID							
No.	Slot No.	Serial No.	Model	Total Capacity	Array	Type	
☐	1	HDD1	TOSHIBA DT02ABA400V	X111S00ESNFH	3726G	-	Normal Disk
☐	2	HDD2	WDC WD40EJRX-89AKWY0	WD-WX22DB078L86	3726G	-	Normal Disk
☐	3	HDD3	ST10000VE001-3BX101	WP00EJSV	9314G	-	Normal Disk
☐	4	HDD4	WDC WD20PURX-64PFUY0	WD-WCC4M4RDAKSC	1863G	-	Normal Disk
☐	5	HDD5	ST8000VX004-2M1101	WKD2Y5BS	7452G	-	Normal Disk
☐	6	HDD6	TOSHIBA DT02ABA400V	X111S01BSNFH	3726G	-	Normal Disk
☐	7	HDD7	ST8000VX004-2M1101	WKD2N09C	7452G	-	Normal Disk
☐	8	HDD8	TOSHIBA HDWN160	27A1K0ENFPAE	5589G	-	Normal Disk

Automatic RAID Creation Create RAID RAID only supports disks with a capacity no less than 4TB

No.	RAID Name	Type	Total Capacity	Status	Hot Spare Disk	Disk	Task
-----	-----------	------	----------------	--------	----------------	------	------

(2) Creating RAID Manually

To create RAID manually, click **Create RAID** to open the **Create RAID** page. Set the RAID name, select the RAID type, select the hard disks, and click **OK** to create the RAID. After the RAID is created, format the RAID.

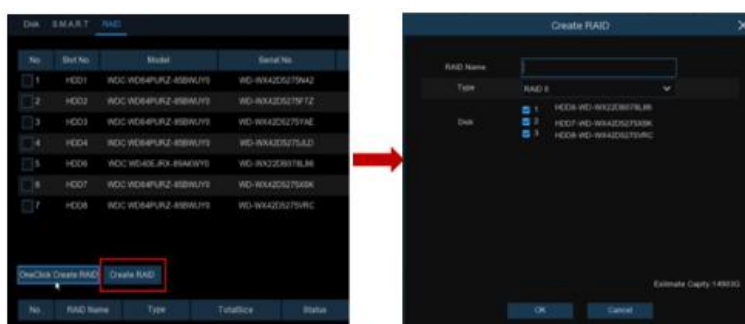

To enable the RAID for normal use, you need to format the RAID first. After RAID formatting is completed, open the disk group configuration page, select the disk group and recording channels, and ensure that camera recording is normal.

Disk Disk Group S.M.A.R.T RAID			
Disk Group Type Record Disk Group			
Disk Group Record Disk Group 1			
Record Channel			
IP Camera			
1	2	3	4
5	6	7	8
9	10	11	12
13	14	15	16
17	18	19	20
21	22	23	24
25	26	27	28
29	30	31	32
33	34	35	36
37	38	39	40
41	42	43	44
45	46	47	48
49	50	51	52
53	54	55	56
57	58	59	60
61	62	63	64
65	66	67	68
69	70	71	72
73	74	75	76
77	78	79	80
81	82	83	84
85	86	87	88
89	90	91	92
93	94	95	96
97	98	99	100
101	102	103	104
105	106	107	108
109	110	111	112
113	114	115	116
117	118	119	120
121	122	123	124
125	126	127	128
129	130	131	132
133	134	135	136
137	138	139	140
141	142	143	144
145	146	147	148
149	150	151	152
153	154	155	156
157	158	159	160
161	162	163	164
165	166	167	168
169	170	171	172
173	174	175	176
177	178	179	180
181	182	183	184
185	186	187	188
189	190	191	192
193	194	195	196
197	198	199	200
201	202	203	204
205	206	207	208
209	210	211	212
213	214	215	216
217	218	219	220
221	222	223	224
225	226	227	228
229	230	231	232
233	234	235	236
237	238	239	240
241	242	243	244
245	246	247	248
249	250	251	252
253	254	255	256

5.6.1.3.3. Setting Hot Spare Disks

To ensure RAID security, when RAID is in degraded status, the system can automatically carry out RAID rebuilding. Therefore, it is recommended that hot spare disks be configured.

On the RAID configuration page, select an idle hard disk, click the **Add HotDisk** button, and confirm the hot spare disk setting. (Hot spare disks are public disks and can be used by all created RAIDs.)

DiskS.M.A.R.TRAID

No.	Slot No.	Model	Serial No.	TotalSize	Array	Type		
☐	1	HDD1	WDC WD64PURZ-85BWUY0	WD-WX42D5275N42	5589G	-	Normal Disk	Add HotDisk
☐	2	HDD2	WDC WD64PURZ-85BWUY0	WD-WX42D5275F7Z	5589G	-	Normal Disk	Add HotDisk
☐	3	HDD3	WDC WD64PURZ-85BWUY0	WD-WX42D5275YAE	5589G	-	Normal Disk	Add HotDisk
☐	4	HDD4	WDC WD64PURZ-85BWUY0	WD-WX42D5275JLD	5589G	-	Normal Disk	Add HotDisk
☐	5	HDD6	WDC WD40EJRX-89AKWY0	WD-WX22DB078L86	3726G	-	Normal Disk	Add HotDisk
☐	6	HDD7	WDC WD64PURZ-85BWUY0	WD-WX42D5275XSK	5589G	-	Normal Disk	Add HotDisk
☐	7	HDD8	WDC WD64PURZ-85BWUY0	WD-WX42D5275VRC	5589G	-	Normal Disk	Add HotDisk

5.6.1.3.4. Rebuilding RAID

The operational status of a RAID includes normal, degraded, and offline. To give full play to RAID advantages and ensure the security and reliability of data storage, you can maintain the disks in a timely manner by viewing RAID status. For a RAID, when there is no physical disk loss, the RAID is in normal status; when the number of physical disks lost exceeds the threshold for the RAID type, the RAID is in offline status; when the actual situation is between the two cases, the RAID is in degraded status. When a RAID is in degraded status, it can be restored to normal status through RAID rebuilding.

(1) Rebuilding RAID Automatically

Automatic RAID rebuilding requires that the device should be configured with hot spare disks in advance and the hot spare disk capacity should be not less than the capacity of the smallest disk of the RAID. If the above conditions are met, when a hard disk in a RAID is lost or damaged, the hot spare disk is activated and considered as a candidate disk for the RAID, and then the automatic rebuilding task is started.

For example, RAID5 consists of hard disks 1, 2, and 3, and hard disk 4 has been configured as a hot spare disk. Hard disk 2 fails in operation, and the system does not detect it. Therefore, RAID5 is in degraded status, and hard disk 4 is immediately activated and considered as a candidate disk. Then, the rebuilding process is started.

No.	RAID Name	Type	TotalSize	Status	HotDisk	Disk	Task
☐ 1	raid5	RAID5	11177G	Degrade	0	1 3 4	Rebuilding.progress0%

Note: 1.After rebuilding is completed, the RAID is restored to normal status. 2.After automatic rebuilding is completed, you need to insert a normal hard disk and set it as a hot spare disk to


ensure that the automatic rebuilding process can be started normally the next time an exception occurs.

No.	RAID Name	Type	TotalSize	Status	HotDisk	Disk	Task
☒ 1	raid5	RAID5	11177G	Normal	0	1 3 4	None

(2) Rebuilding RAID Manually

When a RAID is in degraded status, if it has no hot spare disk, automatically rebuilding cannot be implemented. You need to manually rebuild the RAID to restore it to normal status.


On the RAID configuration page, select an idle disk, and click the **Rebuild RAID** button, verify the password, and then start RAID rebuilding. After the rebuilding is completed, the RAID is restored to normal status.

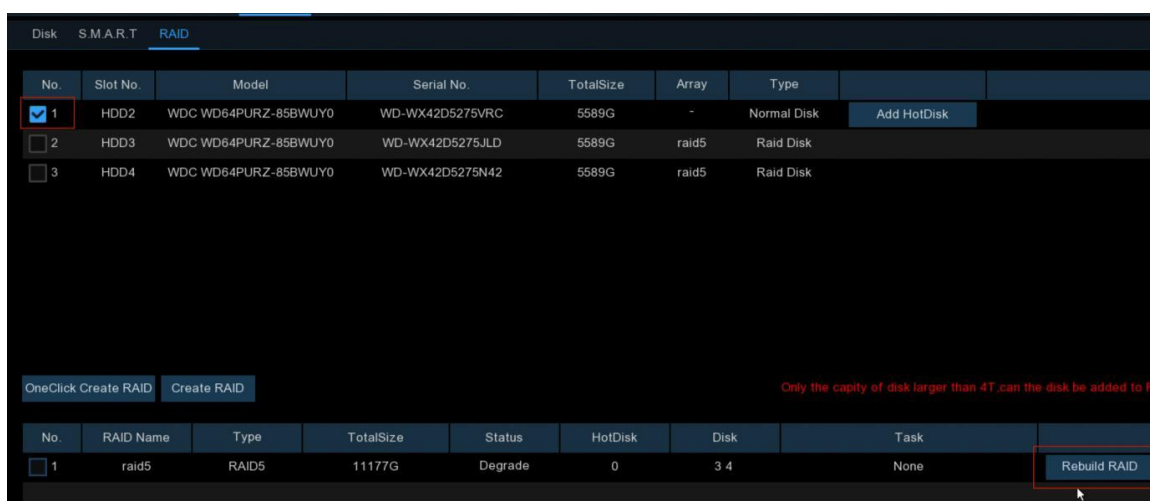

The screenshot shows the RAID configuration interface. At the top, there are tabs for 'Disk', 'S.M.A.R.T', and 'RAID'. Below the tabs is a table with columns: No., Slot No., Model, Serial No., TotalSize, Array, Type, and a button 'Add HotDisk'. The table contains three rows of disks. The first row is selected with a checkbox. Below the table, there are buttons 'OneClick Create RAID' and 'Create RAID'. A red warning message states: 'Only the capacity of disk larger than 4T can the disk be added to RAID'. At the bottom, there is another table with columns: No., RAID Name, Type, TotalSize, Status, HotDisk, Disk, and Task. The first row shows 'raid5' in 'Degraded' status. To the right of this table is a 'Rebuild RAID' button.

5.6.1.3.5. Deleting RAID


Select the RAID to be deleted, click the **Delete RAID** button, enter the administrator password, and click **OK** to delete the RAID.

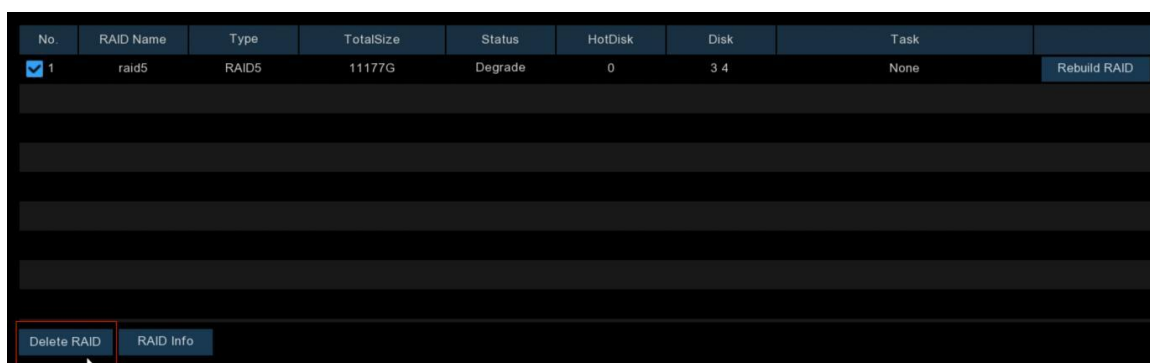

The screenshot shows the RAID configuration interface. At the top, there are tabs for 'Disk', 'S.M.A.R.T', and 'RAID'. Below the tabs is a table with columns: No., RAID Name, Type, TotalSize, Status, HotDisk, Disk, and Task. The first row shows 'raid5' in 'Degraded' status. To the right of this table is a 'Rebuild RAID' button. At the bottom, there are buttons 'Delete RAID' and 'RAID Info'.


5.6.1.3.6 Viewing RAID Information

Click the **RAID Info** button to open the **RAID Info** page to view the RAID function information.

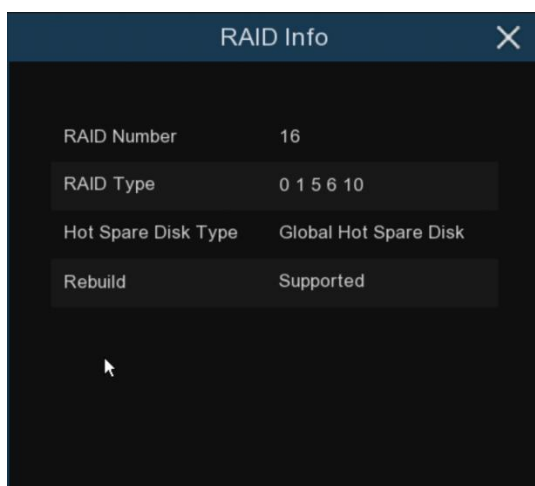

5.6.2. Cloud Storage

Your NVR can copy snapshots and video recordings to the cloud via Dropbox™ or Google Drive™ which is a service that allows you to store and share snapshots and video recordings and always have them on hand when needed.

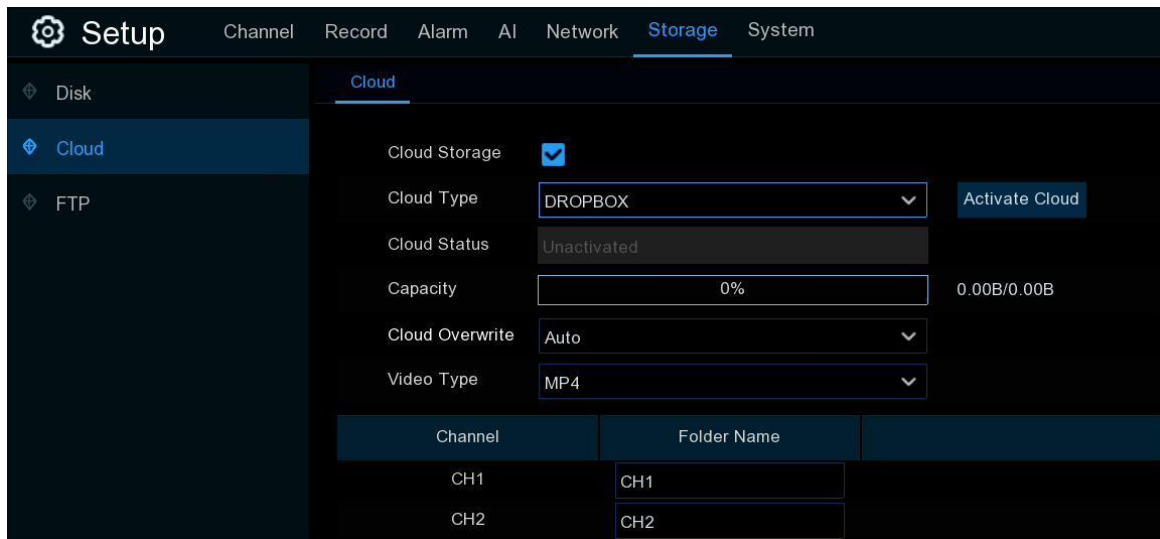


The screenshot shows the 'Setup' menu with the 'Storage' tab selected. The 'Cloud' option is highlighted in the left sidebar. The main configuration area for 'Cloud' is displayed, showing the following settings:

- Cloud Storage:** ☒
- Cloud Type:** DROPTBOX (dropdown menu)
- Cloud Status:** Unactivated
- Capacity:** 0% (displayed as 0.00B/0.00B)
- Cloud Overwrite:** Auto (dropdown menu)
- Video Type:** MP4 (dropdown menu)

Below the settings, there is a table for configuring folders for each channel:

Channel	Folder Name
CH1	CH1
CH2	CH2

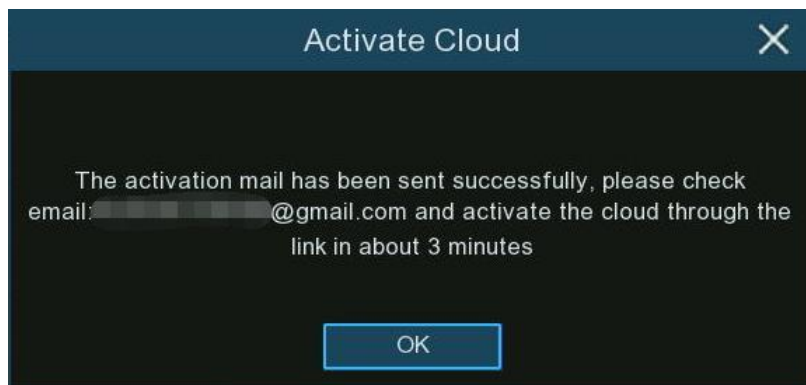

Cloud Type: To choose Dropbox or Google Drive.

Cloud Status: This will change to Activated when active.

Capacity: When activated, this will display how much free space you have on your cloud storage.

Cloud Overwrite: This instructs your NVR to overwrite the oldest video files as the cloud storage becomes full. You also have the option of selecting the amount of days for recordings to be kept before they are overwritten. For example, if you choose the option 7 days then only the last 7 days' recordings are kept on the cloud storage. To prevent overwriting any old recordings, select OFF. If you have set Off on this feature, please check the storage status regularly to make sure the space is not full. Pictures or recordings will be stopped to upload if the space is full. We recommended leaving the Auto selection as this prevents the cloud storage from running out of storage space.

Video Type: To choose the video format you want to upload.

Folder Name: To create a folder for each camera for saving its uploading files.

5.6.2.1. Dropbox Settings

1. Before activation, we recommend that you create a Dropbox account first. Go to www.dropbox.com, input your name, email address, and password, agree to the terms & conditions, then click or tap the sign up button. If you already have a Dropbox account, you can skip this step.
2. Click the **Activate Cloud** button, the system will send an activation letter to your receiver email box which you have set in the Email Setup page.
3. Login your email box and click the link in the email content. It will turn to the cloud server authorization login page. Input your Dropbox account name and password to login.



Sign in to Dropbox to associate "DVRCloudStorage"


Sign in with your Google Account


Sign in with your Apple account

or

[forget your password?](#)


4. Input the DVR local IP address and web port, and then click **Authorize**.

Dropbox needs to be activated for this device. Please make sure the PC is on the same network as the device and enter the local IP address of the device below. The IP address can be found in the Network section of the device settings.

IP Address


Port

5. Input the DVR username and password and then click OK.

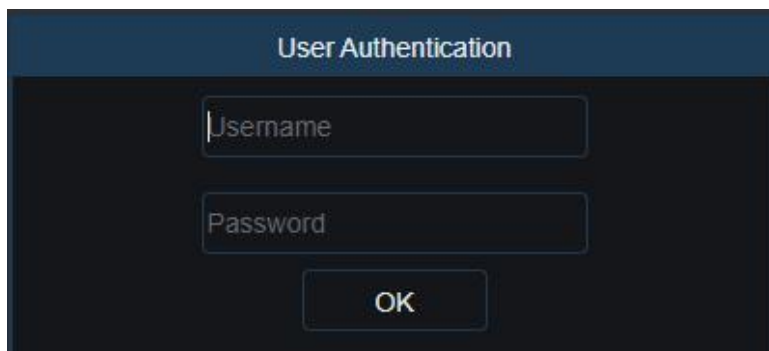


A dark-themed dialog box titled "User Authentication". It contains two input fields: "Username" and "Password". Below the fields is an "OK" button.

6. Authorization finished; the webpage will turn to your Dropbox.

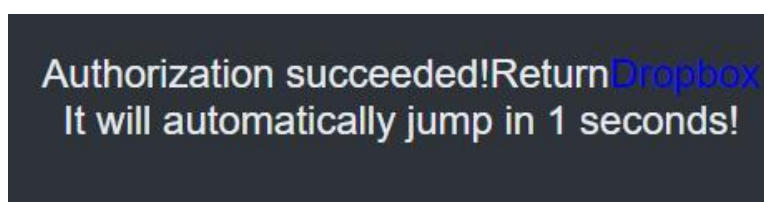

Authorization succeeded! Return [Dropbox](#)
It will automatically jump in 1 seconds!


7. The Cloud has completed the setup if you find a new folder named by your NVR device name and MAC address in the Dropbox storage. Your alarm pictures and videos will be upload to this folder.

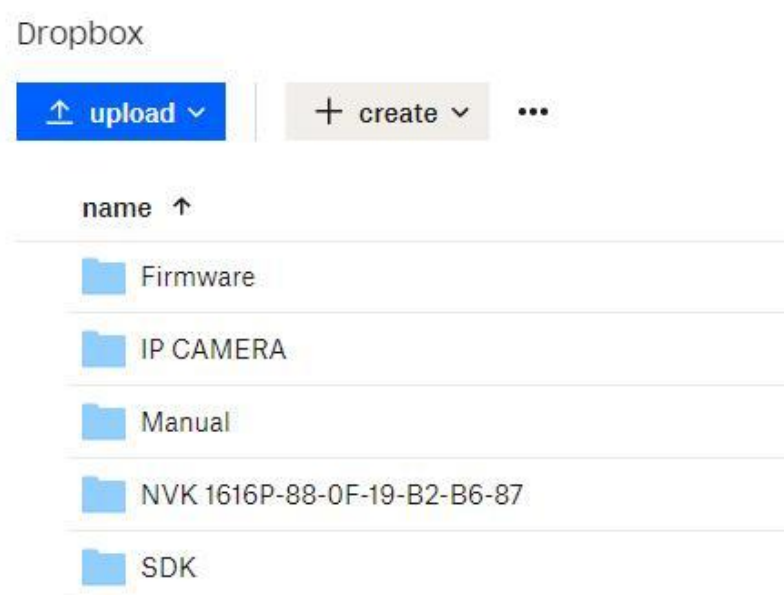


5.6.2.2. Google Drive Settings

1. Before activation, we recommend that you create a Google Drive account first. Go to <https://www.google.com/drive>, input your name, email address, and password, agree to the terms & conditions, then click or tap the sign up button. If you already have a Google Drive account, you can skip this step.


2. Click the **Activate Cloud** button, the system will send an activation letter to your receiver email box which you have set in the Email Setup page.

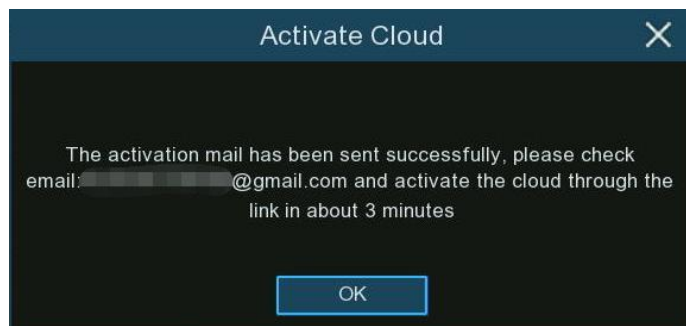

3. On the email, you will find an activation code and a link illustrated as below. Click the link and then enter the activation code you received on the webpage, and then click Next.

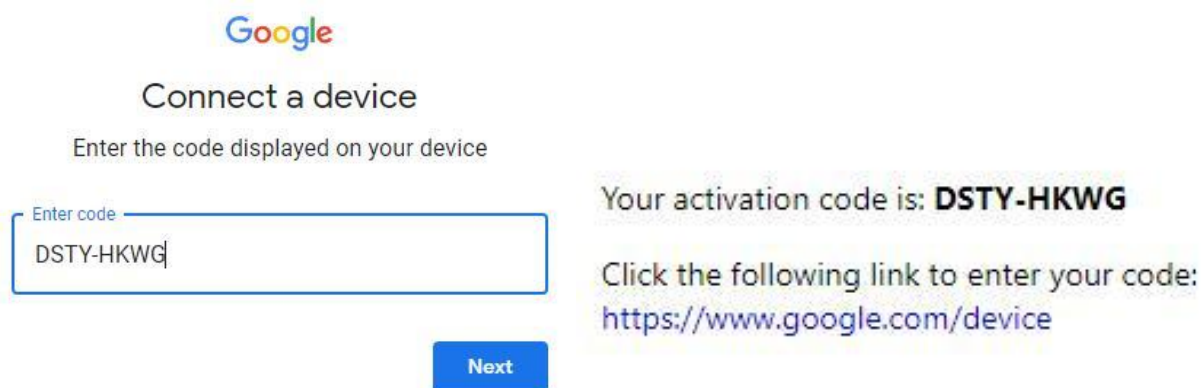

4. Enter your Google account and password to login your Google Drive.

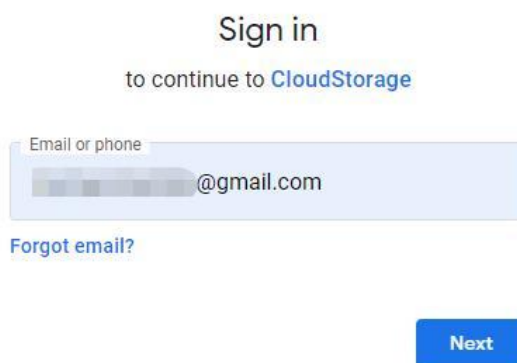

5. Click Allow, the settings of your Google Drive cloud have completed now.

CloudStorage wants to access your Google Account

 @gmail.com

This will allow **CloudStorage** to:



See, edit, create, and delete only the specific
Google Drive files you use with this app



Make sure you trust CloudStorage

You may be sharing sensitive info with this site or app. You
can always see or remove access in your [Google Account](#).

Learn how Google helps you [share data safely](#).

See CloudStorage's [Privacy Policy](#) and [Terms of Service](#).

Cancel

Allow

Success! Device connected

 @gmail.com




Continue on your device

To see all apps connected to your Google Account go to
[Google Account](#)

5.6.3 FTP Settings

This menu allows to configure your FTP settings for uploading captured snapshots or videos to your FTP server.

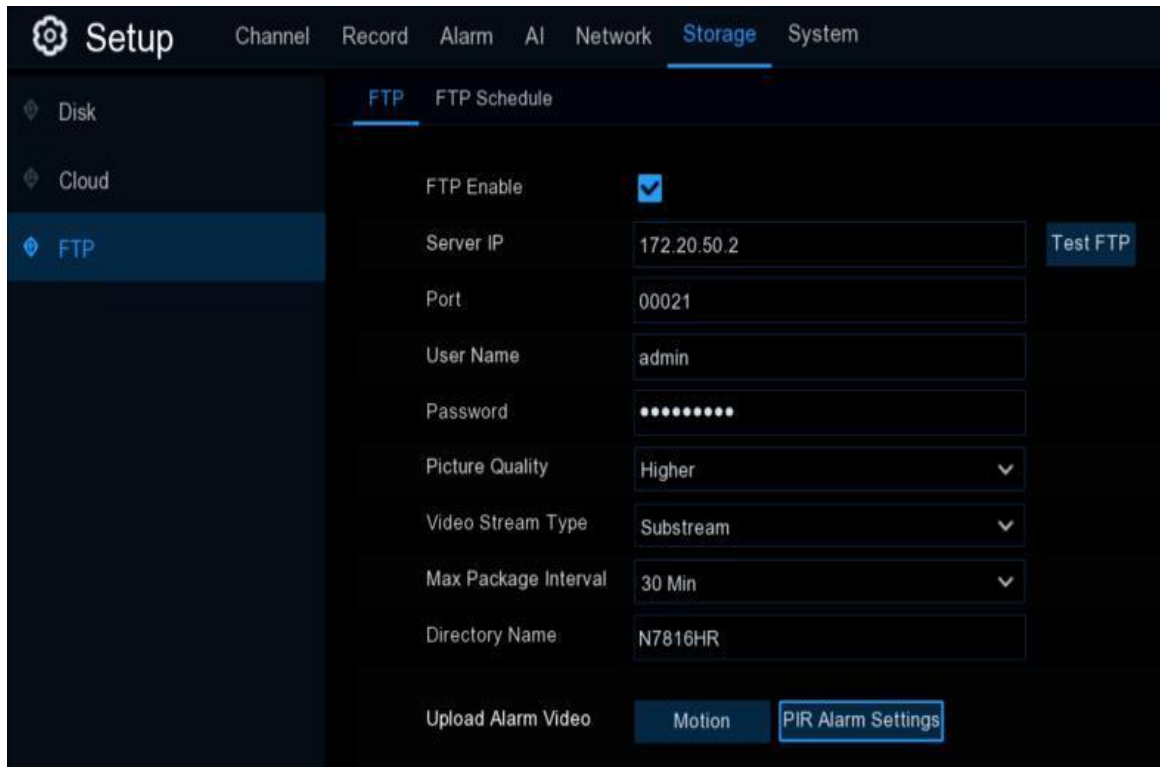

FTP Enable: Tick the checkbox to enable FTP function.

Server IP: Enter IP address or domain name of your FTP server.

Port: Enter the FTP port for file exchanges.

User Name/ Password: Enter the user name and password of FTP server.

Picture Resolution: To choose the resolution of snapshots that you want to upload. Maximum resolution is 1920x1080.

Picture Quality: Choose the image quality of snapshots that you want to upload.


Video Stream Type: Choose mainstream or substream video you want to upload.

Max. Package Interval: Set the maximum time duration of each single video you want to upload.

Directory Name: Enter the directory name on your FTP server to save the uploaded pictures and videos. To make sure all settings are correct, click **Test FTP**. The system sends an automated file to your ftp server. If you received a message shown "Write to file succeeded!", it means the configuration parameters are correct.

5.6.3.1. FTP Schedule


If FTP upload is enabled on your NVR, alarm images or videos would be uploaded 24 hours as default. You can change the schedule when your NVR to upload the alarm images or videos. For example, you may only want to receive alarm images or videos during the day but not in the evening. An alternative schedule can be created for each camera.

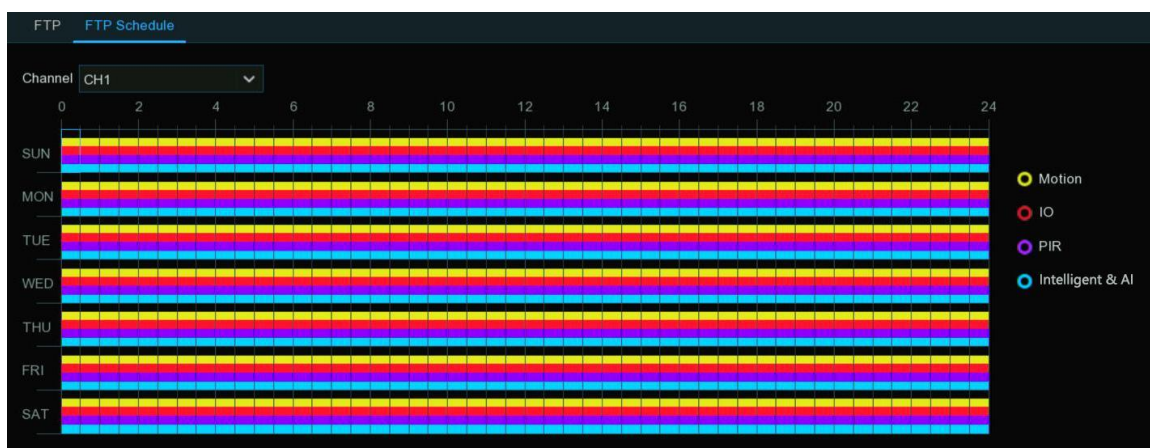

1. Select a channel you want to set the schedule.
2. Click on ratio button of the alarm type that you want to upload for:
 - **Motion:** Upload for motion detection alarm images or videos
 - **IO:** Upload for I/O triggered alarm images or videos
 - **PIR:** Upload for PIR detection alarm images or videos
 - **Intelligent & AI:** Upload for Intelligent or AI detection alarm images or videos
3. Using the mouse, click on a square to change or click and drag the mouse over the squares corresponding to your desired period
4. Repeat step 2 & 3 to set the schedule for other alarm type.
5. The set schedule is valid only for one channel. If you want to use the same recording schedule for other channels, use **Copy** function.
6. Click **Apply** to save your settings.

5.7. System Configuration

Change general system information such as date, time and region, edit passwords and permissions, system maintenance, and more.

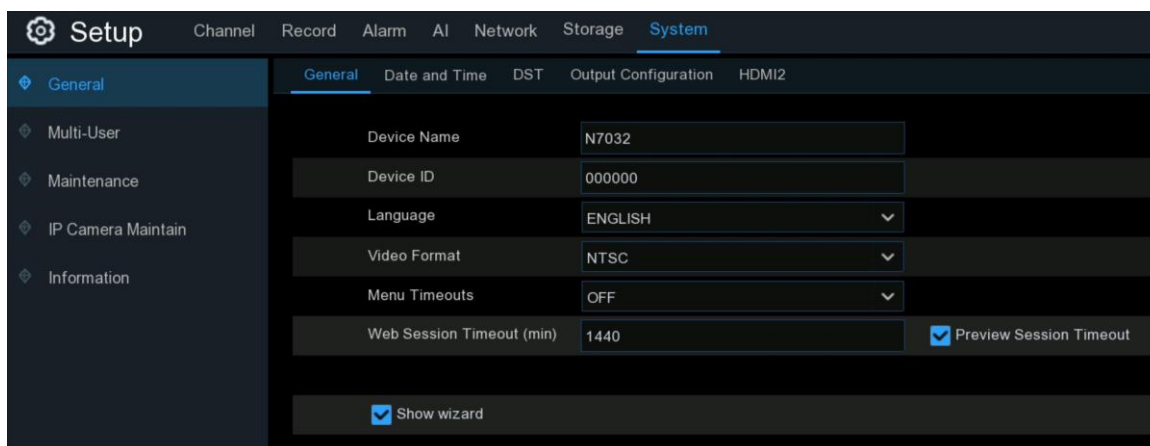


Setup	Channel	Record	Alarm	AI	Network	Storage	System
General							General Date and Time DST Output Configuration HDMI2
Multi-User							Device Name: N7032
Maintenance							Device ID: 000000
IP Camera Maintain							Language: ENGLISH
Information							Video Format: NTSC
							Menu Timeouts: OFF
							Web Session Timeout (min): 1440
							☒ Preview Session Timeout
							☒ Show wizard

5.7.1. General Settings

Change general system information such as language, date & time, display settings, and more.

5.7.1.1. General

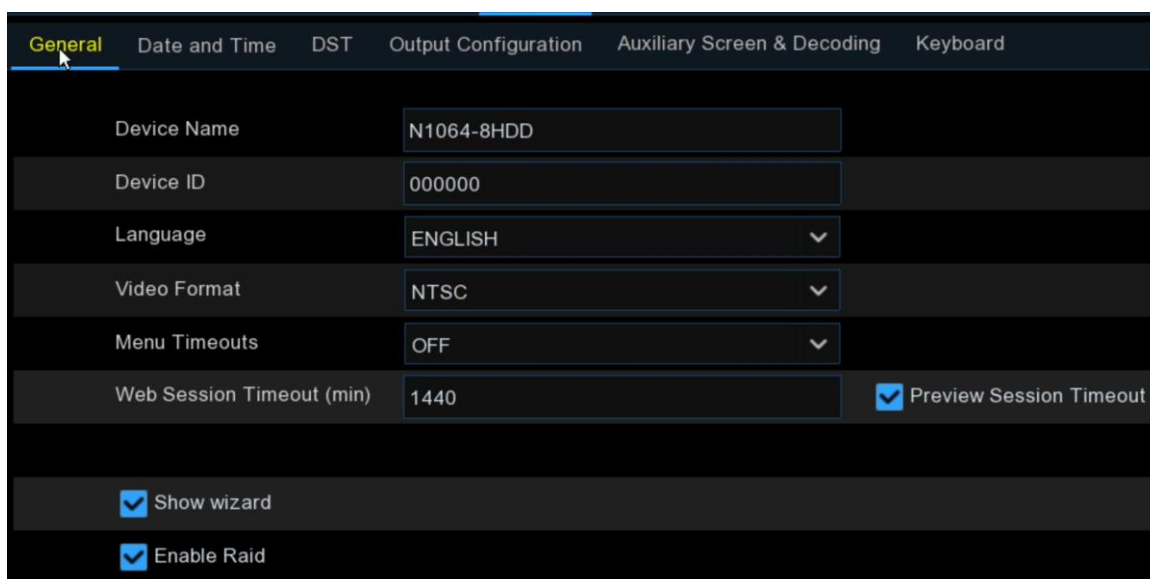

General	Date and Time	DST	Output Configuration	Auxiliary Screen & Decoding	Keyboard
Device Name					
N1064-8HDD					
Device ID					
000000					
Language					
ENGLISH					
Video Format					
NTSC					
Menu Timeouts					
OFF					
Web Session Timeout (min)					
1440					
☒ Preview Session Timeout					
☒ Show wizard					
☒ Enable Raid					

Device Name: To rename your NVR(if required). The name can include both letters and digital numbers.

Device ID: Enter the desired ID for your NVR. The device ID is used to identify the NVR, and can only be composed of numbers. For example, 2pcs NVRs are installed in the same place, the Device ID is 000000 for one of the NVRs, and 111111 for another NVR. When you want to operate the NVR with a remote controller, both of the NVR may receive the signal from controller & act at the same time. If you want to control only the NVR with ID 111111, you can input the Device ID 111111 in login page with remote controller for further operations.

Language: Select a language you would like the system menus to be displayed in. Multiple languages are available.

Video Format: Select the correct video standard for your region.

Menu Timeouts: Click the drop-down menu to select the time your NVR will exit the Main Menu when idle. You can also disable this by selecting "**OFF**" (password protection will be temporarily disabled).

Web Session Timeouts: Enter the time (in minutes) your NVR will exit web access when idle in the setting page. Adjustable time can be set from 5 minutes to 1,440 minutes. If you tick on the checkbox of "**Preview Session Timeouts**", the web access will be exited also when idle in the live view page.

Show Wizard: Click the checkbox if you would like to display the Startup Wizard each time you turn on or reboot your NVR.

Enable Raid: Used to set whether to enable the RAID function and apply it. The configuration takes effect after the system is restarted.

5.7.1.2. Date and Time

Date & Time

General	Date and Time	DST	Output Configuration	Auxiliary Screen & Decoding	Keyboard
☒ Static ☐ NTP					
Date		03/06/2023 			
Time		03:13:43			
Date Format		MM/DD/YYYY 			
Time Format		24Hour 			
Time Zone		GMT 			

Date: Click the calendar icon to change the date.

Time: Click the dialogue box to change the time.

Date Format: Select the preferred date format.

Time Format: Select the preferred time format.

Time Zone: Select a time zone relevant to your region or city.

NTP Settings The NTP (Network Time Protocol) function gives your NVR the ability to automatically sync its clock with a time server. This ensures that the date and time are accurate and ensures correct time stamping when events occur.

☐ Static	☒ NTP
Date	2023-02-28 
Time	15:20:02
Date Format	YYYY-MM-DD 
Time Format	24Hour 
Time Zone	GMT+08:00 
Server Address	pool.ntp.org 
Update Now	

Tick the checkbox of **"Enable NTP"**, and select a **"Server Address"**, click **"Update Now"** to manually sync the date & time. When NTP function is enabled, system will update the system time at 00:07:50 per day or every time when the system is starting up. Click **"Apply"** to save your settings.

5.7.1.3. DST

The DST (Daylight Saving Time) function allows you to select the amount of time that Daylight Saving has increased by in your particular time zone or region.

DST Settings				
Enable DST	☒			
Time Offset	1Hour			
DST Mode	Week			
Start Time	Mar.	The 2nd	Sun.	02:00:00
End Time	Nov.	The 1st	Sun.	02:00:00

Enable DST: If Daylight Saving applies to your time zone or region, click the drop-down menu to enable it.


Time Offset: Select the amount of time that Daylight Saving has increased by in your time zone. This refers to the difference in minutes, between Coordinated Universal Time (UTC) and the local time.

DST Mode: You can select how Daylight Saving starts and ends:

- **Week:** Select the month, a particular day, and time when Daylight Saving starts and ends. For example, 2 a.m. on the first Sunday of a particular month.
- **Date:** Select the start date (click the calendar icon), end date, and time when Daylight Saving starts and ends.

5.7.1.4. Output Configuration

This menu allows you to configure video output parameters.

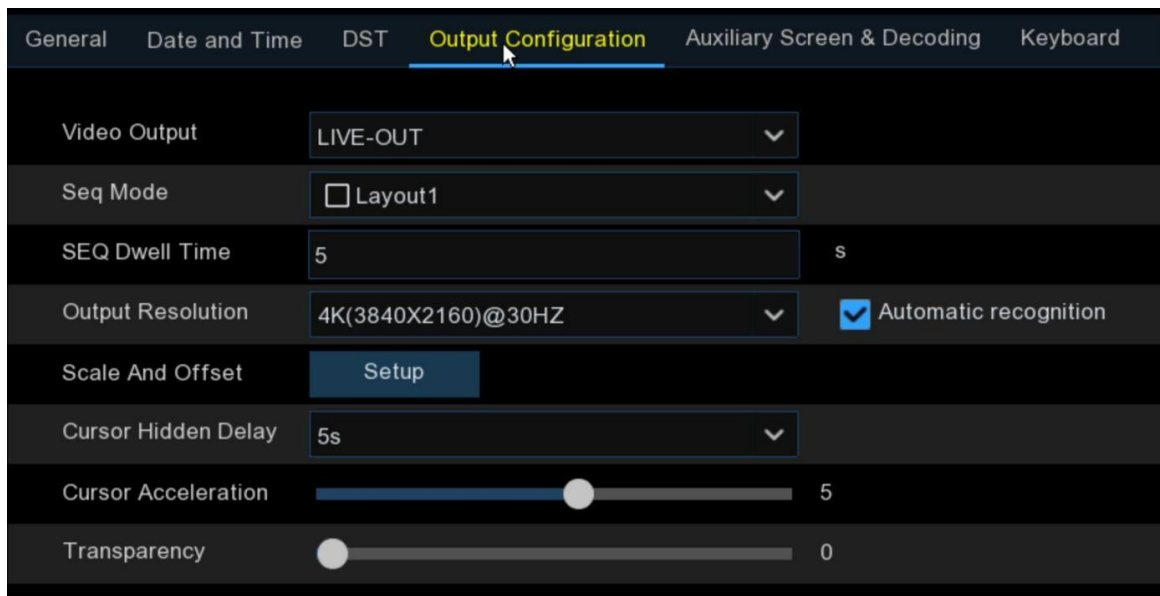

The screenshot shows the 'Output Configuration' tab selected in a menu bar. The settings are as follows:


- Video Output:** LIVE-OUT (dropdown menu)
- Seq Mode:** ☐ Layout1 (dropdown menu)
- SEQ Dwell Time:** 5 (input field) s
- Output Resolution:** 4K(3840X2160)@30HZ (dropdown menu) ☒ Automatic recognition
- Scale And Offset:** Setup (button)
- Cursor Hidden Delay:** 5s (dropdown menu)
- Cursor Acceleration:** 5 (slider)
- Transparency:** 0 (slider)

Video Output: Leave the default selection.


SEQ Mode: Select how many video channels you would like to display at a time when your NVR is in sequence mode.

SEQ Dwell Time: Enter in seconds the maximum length of time you would like to display a video channel(s) in sequence mode before displaying the next video channel(s) (300 seconds is the maximum).

VGA/HDMI Resolution: Set the VGA/HDMI output resolution. Check **Auto Recognition** will automatically set the resolution compatible with the monitor you connected when the DVR boots. The system will suggest to modify the resolution if it detects a higher resolution available each time when the system starts.

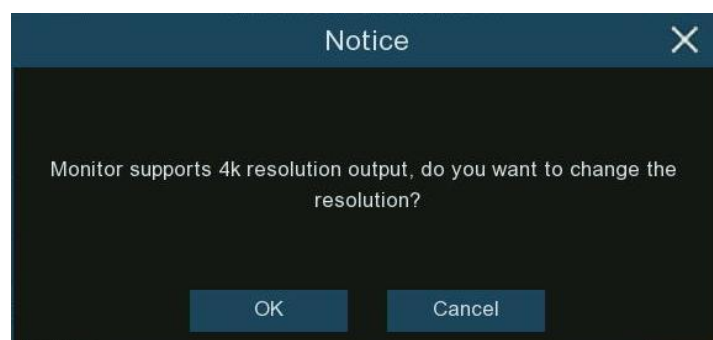

Scale and Offset: To set the image scale and offset. Click **Setup** button to configure.

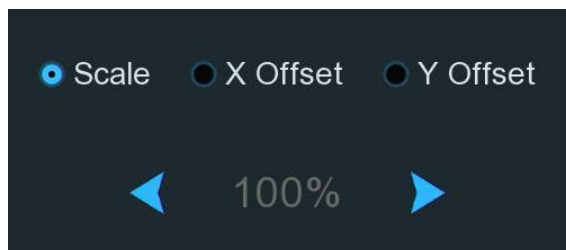

Scale: To adjust the size of the display window.

X Offset: To move the display window towards left or right.

Y Offset: To move the display window towards up or down.

Tick on ratio button of which you want to set, and then click or long press the < or > button, or using scroll wheel of your mouse to adjust accordingly.

Cursor Hidden Delay: Click the drop-down menu to select the time your NVR will hide the mouse cursor when idle. You can also disable this by selecting "OFF".

Cursor Acceleration: Adjust the moving speed of the mouse cursor. **Transparency:** Click and hold the slider left or right to change how transparent the Menu Bar and Main Menu will appear on-screen. Adjust accordingly.

Note: 1. When the device output resolution is set to 8K, HDMI-2 will be disabled and image output cannot be performed 2.The device only supports HDMI-1 output 8K

5.7.1.5 Auxiliary Screen&Decoding

The following three output parameters for secondary screen display should be configured: HDMI-2, HDMI-3, and HDMI-4.

General	Date and Time	DST	Output Configuration	Auxiliary Screen & Decoding	Keyboard		
HDMI	Switch	Output Resolution	Decoding Ability(1080P@30fps)	Audio	Auto SEQ	View Mode	Define SEQ Setting
HDMI-1			12				
HDMI-2	☒	4K(3840X2160)@30HZ	8	☒	☐	View Mode36	
HDMI-3	☒	4K(3840X2160)@30HZ	8	☒	☐	View Mode36	
HDMI-4	☒	1080P(1920x1080)	4	☒	☐	View Mode16	

Switch: Used to set whether to enable the secondary screen display.

Output Resolution: Select the display resolution suitable for the secondary screen.

Decoding Ability(1080P@30): Used to set the decoding capability of the secondary screen. For example, you can set the decoding capability of HDMI-2 to 8, meaning that HDMI-2 can provide a preview of eight 1080P 30-frame channels.

Audio: Used to set whether to enable the secondary screen audio.

Auto SEQ: Used to set whether to enable SEQ mode on the secondary screen.

View Mode: Select the number of video channels to be displayed statically on the secondary screen.

Define SEQ Setting: Select the number of channels to be displayed statically on the secondary screen. **Seq Mode:** Select the number of video channels to be displayed in SEQ mode on the secondary screen.

SEQ Dwell Time: Used to set the SEQ dwell time on the secondary screen in seconds.

Spot Poll Setting: Select the channels for sequential display on the secondary screen in dynamic mode.

Note: You can set the output resolution of HDMI-1 on the output configuration page. For more information, see Section 5.7.1.4. When the output resolution of HDMI-1 is 8K, HDMI-2 output not available.

5.7.2. Users

This menu allows you to configure the user name, password and user permission.

General	Multi-User					
Multi-User	No.	User Name	Level	User Enable	User Edit	Permission
Maintenance	1	admin	ADMIN	Enable		
IP Camera Maintain	2	user1	USER1	Disable		
Information	3	user2	USER2	Disable		
	4	user3	USER3	Disable		
	5	user4	USER4	Disable		
	6	user5	USER5	Disable		
	7	user6	USER6	Disable		
	8	user7	USER7	Disable		
	9	user8	USER8	Disable		
	10	user9	USER9	Disable		
	11	user10	USER10	Disable		
	12	user11	USER11	Disable		
	13	user12	USER12	Disable		
	14	user13	USER13	Disable		
	15	user14	USER14	Disable		
	16	user15	USER15	Disable		
	17	user16	USER16	Disable		
Default User: admin						

The system supports the following account types:

- **ADMIN** — System administrator has full control of the system, and can change the password of both administrator and users and enable/disable password protection.
- **USER** — Normal users only have access to live viewing, search, playback, and other functions. You may set up multiple user accounts with varying levels of access to the system.

Default User : Select the default user to login the system when the system starts. Admin is the default user account. If multiple user accounts have been created, click the drop-down menu to turn this off.

5.7.2.1. Edit Users

You're able to edit the user's password, to enable or disable a user, set the limitation of remote access.

Multi-User					
No.	User Name	Level	User Enable	User Edit	Permission
1	admin	ADMIN	Enable		
2	user1	USER1	Disable		
3	user2	USER2	Disable		
4	user3	USER3	Disable		
5	user4	USER4	Disable		

1. Click the User Edit button of the user you want to configure.

2. For the Admin, you can proceed:

To change password: The password must be a combination of 8 to 16 characters, which is combined with at least 2 kinds of different characters from uppercase letters, lowercase letters, digit numbers and special symbols. Enter your new password again to confirm, and then click **Save** to save your new password. You will be required to input your old password to authenticate.

User Edit

Level

ADMIN

User Name

admin

Password Strength

Password

.....

Confirm

.....

Unlock Pattern Enable

Enable

Draw

Limitation of Remote Access

3

Default

Save

Cancel

Unlock

admin

Device ID : 000000

Draw the unlock pattern first.

Password


To enable or disable "**Unlock Pattern**": if this is enabled, you can draw your pattern and save. You can unlock the NVR by drawing the pattern when you login the system next time.

To set the "**Limitation of Remote Access**": this will limit the maximum number of remote accesses with this user account at the same time. Remote accesses include but not limited to webpage, CMS/VMS, mobile app, 3rd party platform.

3. For a normal user, you can proceed:

- To enable or disable this user.
- To give a user name and password to the user.


- To set the "**Limitation of Remote Access**". This will limit the maximum number of remote accesses with this user account at the same time. Remote accesses include but not limited to webpage, CMS/VMS, mobile app, 3rd party platform.

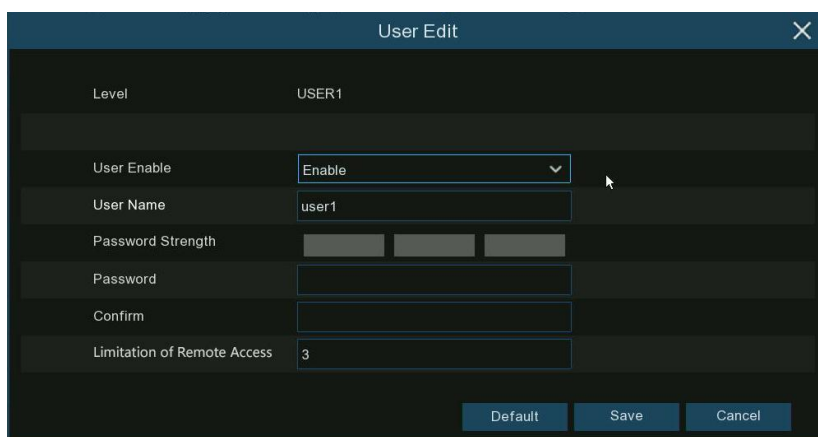

The 'User Edit' dialog box shows the configuration for 'USER1'. The 'User Enable' dropdown is set to 'Enable'. The 'User Name' is 'user1'. The 'Password Strength' is indicated by three empty bars. The 'Password' and 'Confirm' fields are empty. The 'Limitation of Remote Access' is set to '3'. At the bottom are 'Default', 'Save', and 'Cancel' buttons.

5.7.2.2. Edit User Permissions

The administrator account is the only account that has full control of all system functions. You can enable or disable access to certain menus and functions of each user account.

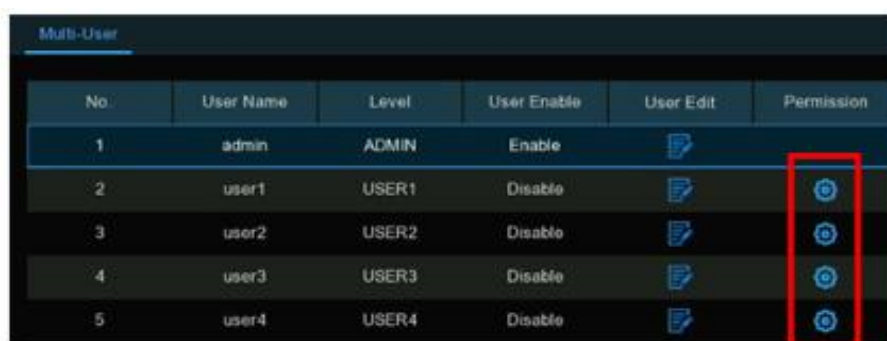

No.	User Name	Level	User Enable	User Edit	Permission
1	admin	ADMIN	Enable		
2	user1	USER1	Disable		
3	user2	USER2	Disable		
4	user3	USER3	Disable		
5	user4	USER4	Disable		

1. Click the User Edit button of the user you want to configure.
2. Tick the checkbox of any system menus or capabilities you would like the user to access. Click All to check all boxes. Click Clear to check none of the boxes.
3. Click Save to save your modifications.

User Permission

User Name

user1

☐ Log Search

☐ Parameter

☐ Auto Reboot

☐ Manual Record

☐ Disk

☐ Remote Login

☐ SEQ Control

☐ Manual Capture

☐ Audio

☐ Database Management

☐ License Plate Management

☐ Subuser Password Change

☐ Backup

☐ IP Camera

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

☐ Live

☐ IP Camera

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

☐ Playback

☐ IP Camera

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

☐ PTZ

☐ IP Camera

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

All


Clear

Save

Cancel


5.7.3. Maintenance

In this section, you will be able to search & view the system log, load default settings, upgrade the system, export & import system parameters, manager system auto reboot, and more.

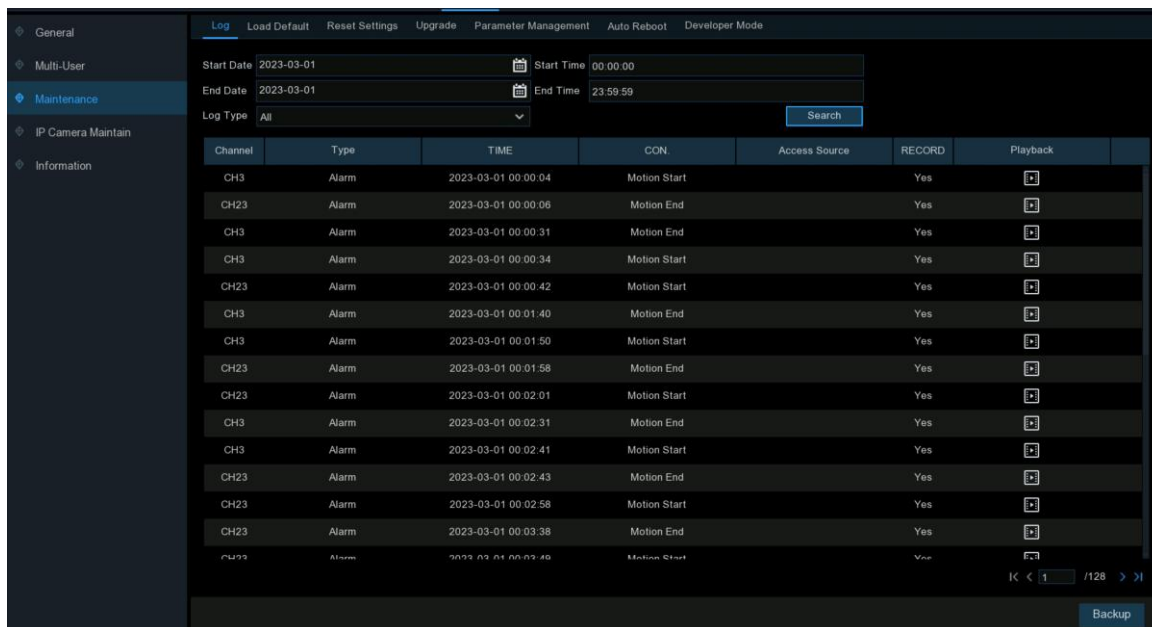

5.7.3.1. System Log

All actions and events that your NVR performs and detects are logged. These log files can be searched, viewed and copied to a USB flash drive for safekeeping.

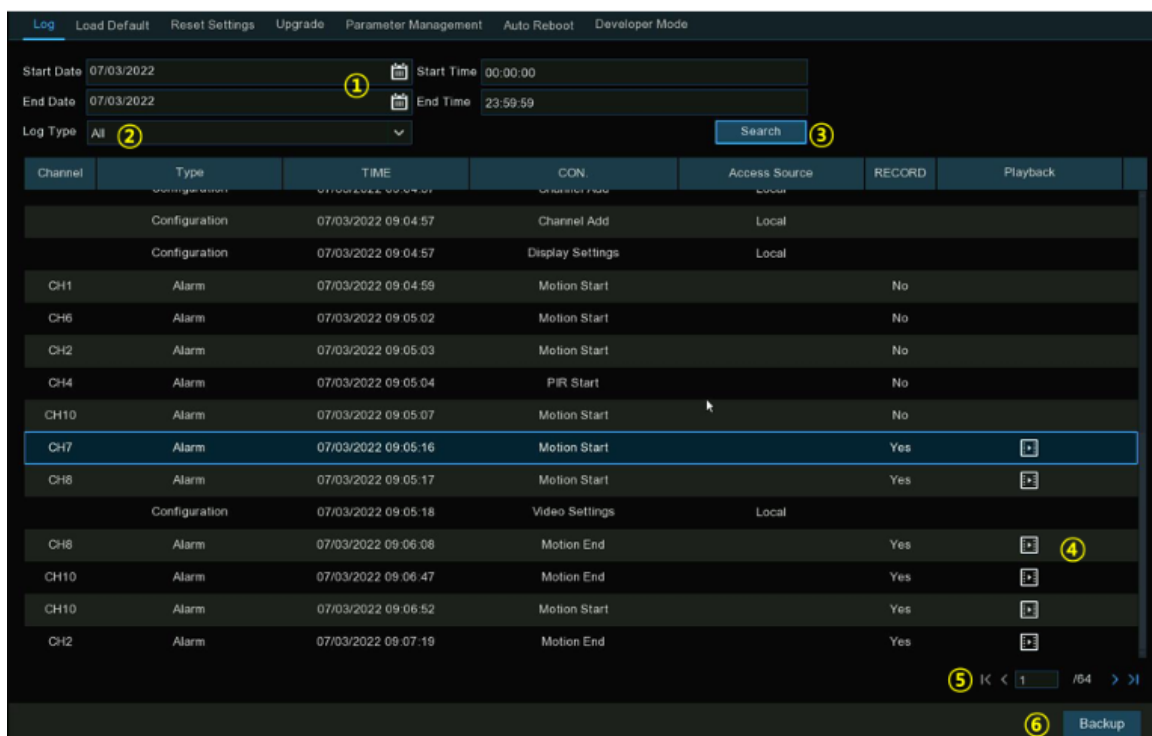

1. **Start/End Date & Start/End Time:** Click the calendar icon to select the month, year and date that you would like to search on. Click the dialogue box to enter a specific start and end time.

2. Log Type: Leave the default selection or click the drop-down menu to select a specific action that you would like to search for.

3. Search: Click this to display a list of log files that match your search criteria. Double-click a file to display information about that log.


4. Playback: Click play button to play the video segment of the event.

5. Click the arrow buttons to turn the page of the search list.

6. Backup: Insert a USB flash drive into your NVR, then click this to copy the log files that match your search criteria.

5.7.3.2. Load Default


Reset the NVR settings to its out-of-box state. You can choose to reset all settings at once, or just settings on specific menus. Restoring default settings will not delete recordings and snapshots saved to the hard drive.

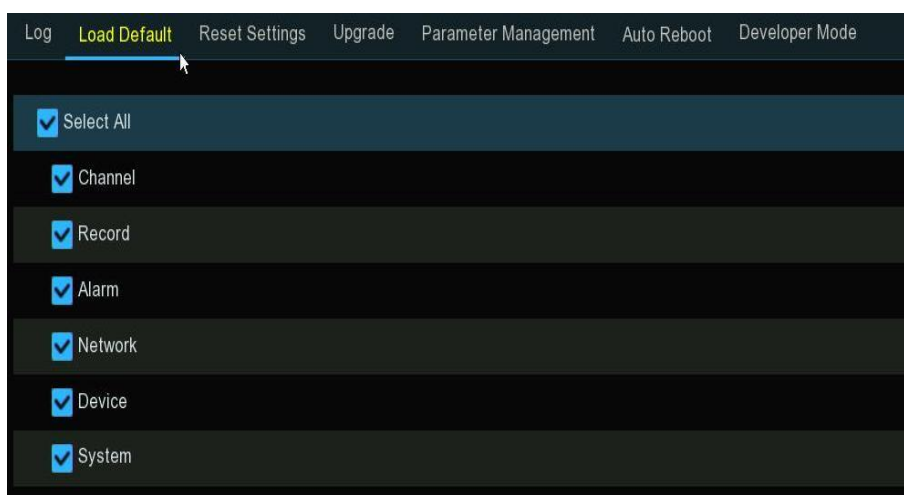

Tick the checkbox of the item(s) you want restore, or check "**Select All**" to choose all items. Click "**Apply**" to load default settings of your chosen items.

5.7.3.3. Reset Settings


If your NVR comes with a reset button on the rear panel, you will see this menu.

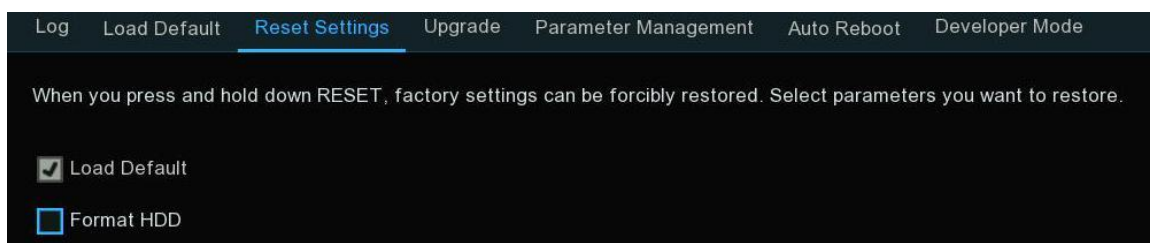

By default, when you press and hold 10 seconds on the reset button with a small pin till the NVR beeps, the NVR will restore default settings. You can tick the checkbox to format HDD if needed.

5.7.3.4. System Upgrade

You can upgrade the firmware by USB flash drive or online.




5.7.3.4.1. Upgrade by USB Flash Drive

1. Copy the firmware file (generally it is ended with ".sw") to your USB drive, and insert the USB flash drive into the NVR's USB port.
2. Click "**Select File**" button to choose the firmware file in your USB flash drive, then Click **OK**.
3. Click "**Upgrade**" button to start firmware upgrade. The upgrade will last around 5-10 minutes, please do **NOT** power off the NVR or remove the USB from NVR during firmware upgrade.
4. The NVR will reboot after upgrade finished.

5.7.3.4.2. Online Upgrade

The device supports over-the-air upgrade. To use this function, you need to set up the upgrade server in advance, create a directory for storing files on the server, and upload the upgrade firmware.

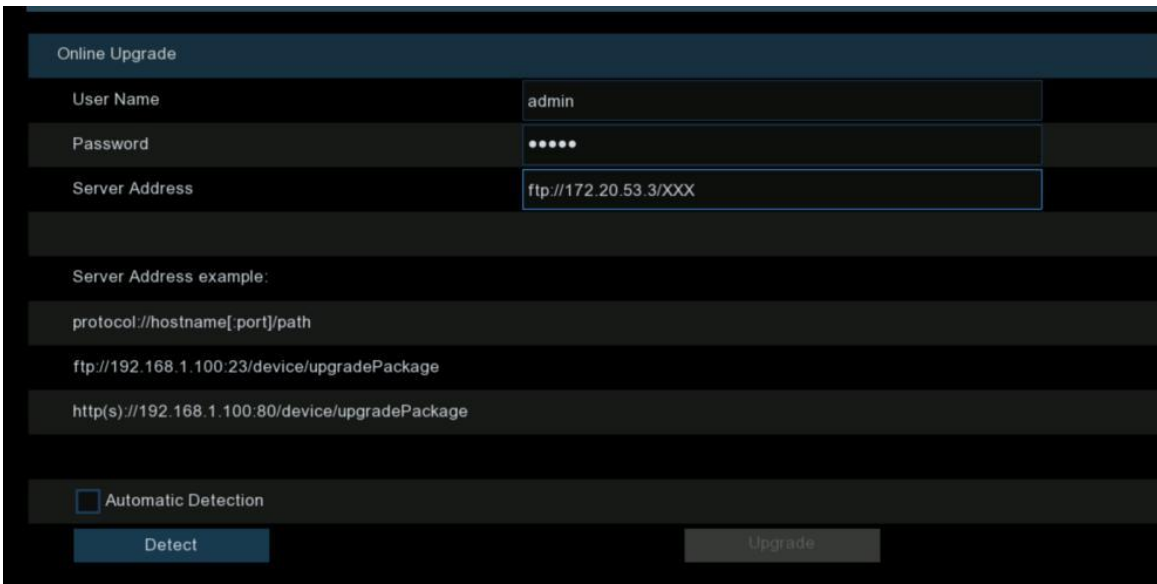
 A screenshot of the 'Online Upgrade' configuration page. It has a title bar 'Online Upgrade'. Below it are three input fields: 'User Name' with 'admin', 'Password' with '*****', and 'Server Address' with 'ftp://172.20.53.3/XXX'. Below these is a section 'Server Address example:' with two examples: 'protocol://hostname[:port]/path' and 'ftp://192.168.1.100:23/device/upgradePackage', followed by 'http(s)://192.168.1.100:80/device/upgradePackage'. At the bottom, there is a checkbox 'Automatic Detection' and two buttons: 'Detect' and 'Upgrade'.

Username: Used to set the server user name. If the server is not configured with any user, the parameter value can be null.


Password: Used to set the server password. If the server is not configured with any password, the parameter value can be null.

Server Address: Used to set the server address. You need to set the upgrade address to the directory for storing the upgrade files.

Automatic Detection: If this option is selected, the device will periodically check and upgrade the firmware on the server at startup and during operation. If there is upgradeable firmware, a prompt message will pop up.


Detect: Click this button to manually detect whether the server has upgradeable firmware.

Upgrade: When it is detected that the server has upgradeable firmware, this button is available. You can click it to confirm the upgrade operation on the device.

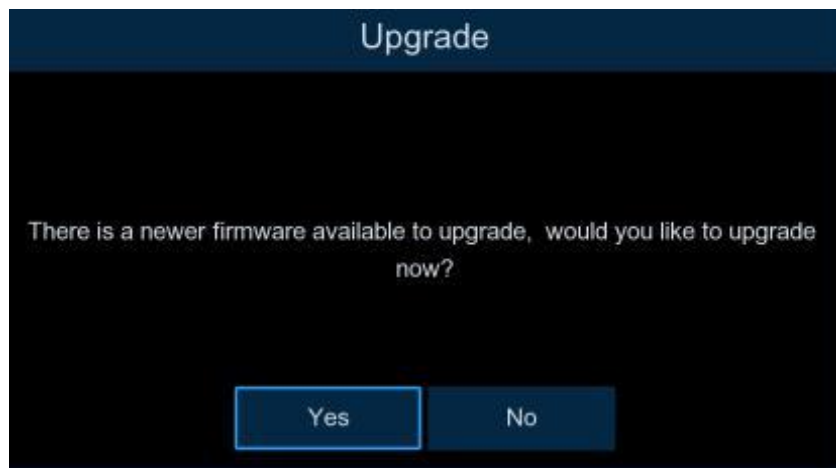

5.7.3.5. Parameter Management

You can export the system settings to a USB flash drive, or import a system setting file from USB flash drive to the NVR.

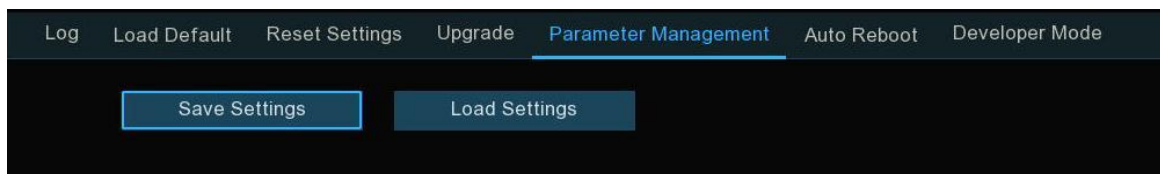


Save Settings: Click this button to export a configuration file containing all the settings that you have customized.

Load Settings: Click this button to import a configuration file containing all the settings that you have customized.

5.7.3.6. Auto Reboot

This menu allows the system to auto reboot the NVR regularly. It is recommended to leave this function enabled, as it maintains the operational integrity of your NVR.

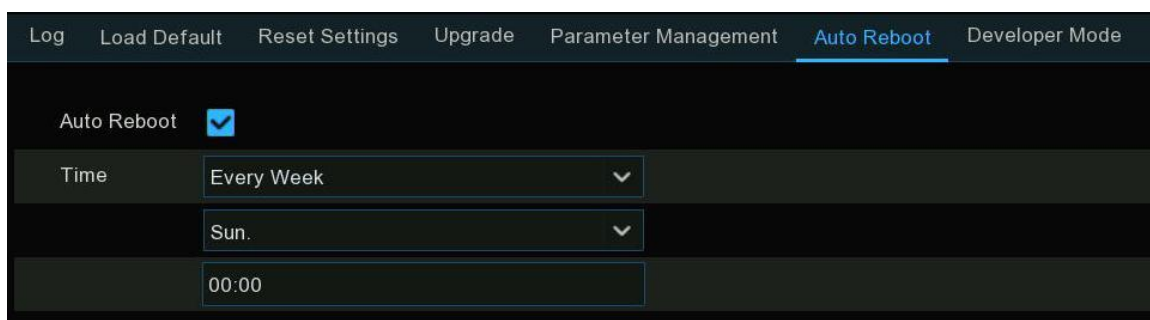


Auto Reboot: Tick to enable.

Time: You can set the NVR to reboot by day, week or month.

5.7.3.7. Developer Mode

This is an advantage feature on some certain models, which is used to acquire debug log for authorized professionals when you report a defective complaint.

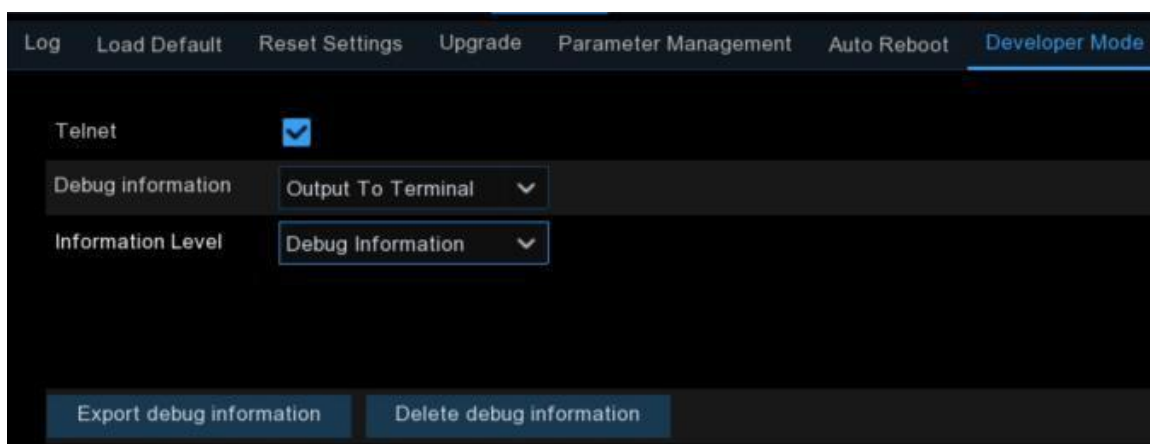

Telnet: This is used for an authorized technician to connect to your NVR remotely. Please keep it disabled unless you're required by an authorized technician.

Debug Log: It is used for authorized professionals to learn the system running status

- **Disabled:** Debug log won't be saved.
- **Output to Terminal:** Debug log will be outputted to terminal port.
- **Output to Disk:** Debug log will be saved to hard disk drive.

Information Level: Used to set the printing level of serial port log information. To enable technical personnel to quickly locate problems, you can set the log output levels in accordance with the device maintenance requirements.

System Information: Only system-level logs (such as low-level drivers) and necessary information during program operation are outputted.

Error Information: In addition to system information, the errors or exception information during program operation are also included in the error log.

Running Information: In addition to the error log, some important information during program operation is also outputted for the developer to analyze the program running status.

Debug Information: In addition to running information, the relevant information added by the developer in advance to assist debugging and positioning is also outputted. There is much print information at this level, which may affect device operation. In general, it is recommended that this option be disabled.


Debug Trace Information: At this level, more detailed debug information is output, further assisting technical personnel to analyze and position the bugs of functional modules. This option is enabled only when the technical personnel clearly requires more detailed information.

Export Debug Log: Export the debug log file from hard disk drive to your USB flash drive.


Delete Debug Log: Delete the debug file from the hard disk drive.

5.7.4. IP Camera Maintain

This menu allows you to upgrade IP camera's firmware or restore default settings of IP camera.

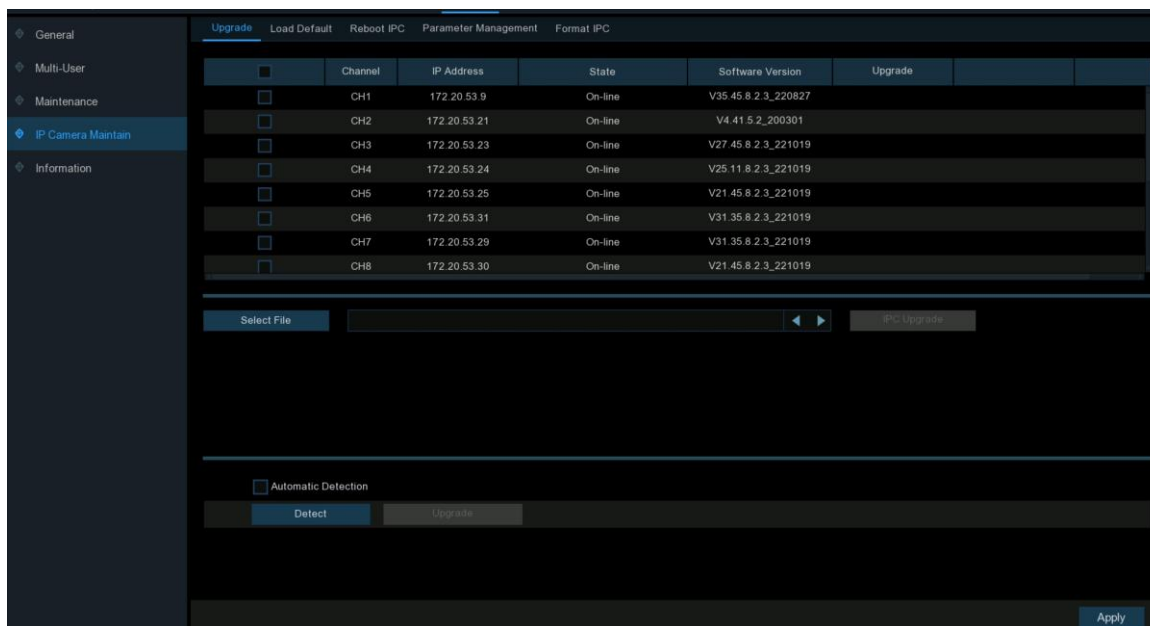

5.7.4.1. Upgrade IP Camera

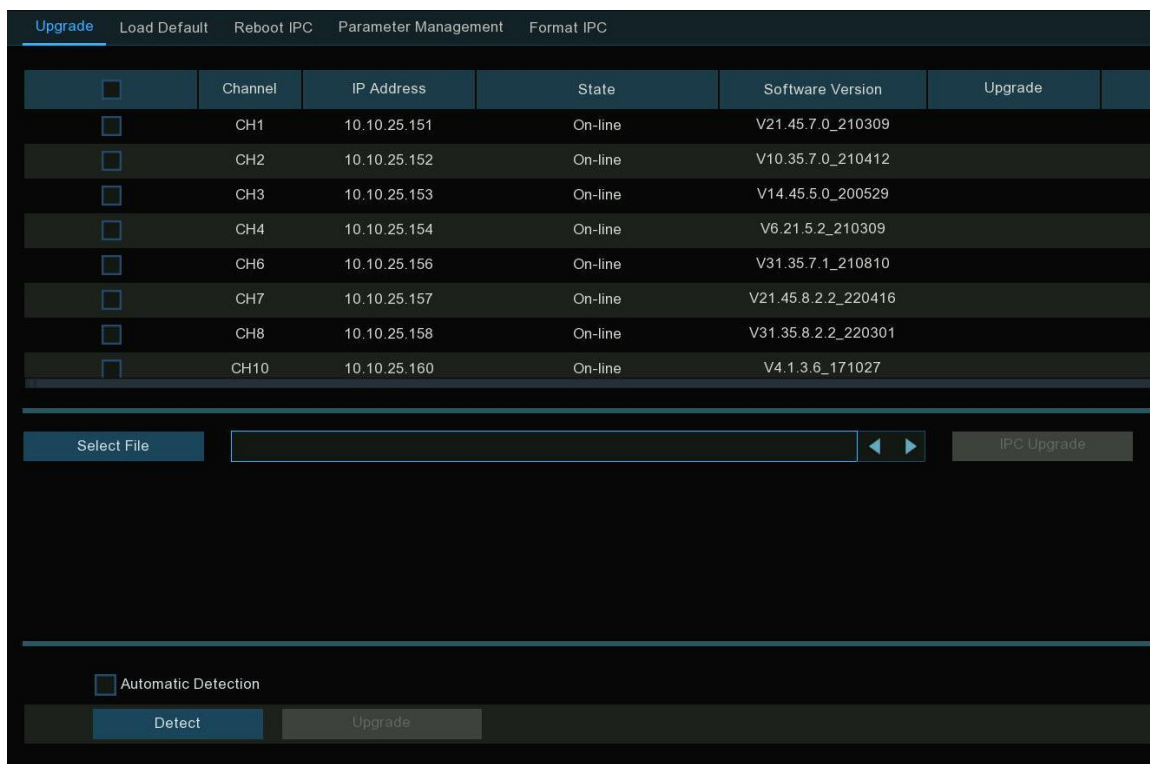

1. Choose one of the IP cameras you want to upgrade firmware.
2. Click **Select File** select the update file from your USB flash drive, then click **OK**.

3. Click **IPC Upgrade** button to start upgrading. You will be required to input the Admin's password to authenticate. Please do **NOT** power off the NVR and IP camera or remove the USB during the upgrading.

For some certain IP cameras which support online upgrade, you can tick "**Automatic Detection**" if you want to automatically check the upgrade file from server at regular intervals.

Click **Detect** button to check if new firmware is available instantly. If new firmware is available, follow the on-screen instructions.

5.7.4.2. Load Default Settings of IP Camera

Upgrade

Load Default

Reboot IPC

Parameter Management

Format IPC

	Channel	IP Address	State	Software Version	
☒	CH1	10.10.25.151	On-line	V21.45.7.0_210309	
☒	CH2	10.10.25.152	On-line	V10.35.7.0_210412	
☐	CH3	10.10.25.153	On-line	V14.45.5.0_200529	
☐	CH4	10.10.25.154	On-line	V6.21.5.2_210309	
☐	CH5	10.10.25.155	On-line	V6.21.5.0_200617	
☐	CH6	10.10.25.156	On-line	V31.35.7.1_210810	
☐	CH7	10.10.25.157	On-line	V21.45.8.2.2_220416	
☐	CH8	10.10.25.158	On-line	V31.35.8.2.2_220301	
☐	CH10	10.10.25.160	On-line	V4.1.3.6_171027	

Load Default

Load Default

1. Choose the IP camera(s) you want to restore.

2. Click **Load Default** to restore settings. You will be required to input the Admin's password to authenticate.

5.7.4.3. Reboot IP Camera

Upgrade
Load Default
Reboot IPC
Parameter Management
Format IPC

	Channel	IP Address	State	Software Version
☒	CH1	10.10.25.151	On-line	V21.45.7.0_210309
☒	CH2	10.10.25.152	On-line	V10.35.7.0_210412
☐	CH3	10.10.25.153	On-line	V14.45.5.0_200529
☐	CH4	10.10.25.154	On-line	V6.21.5.2_210309
☐	CH5	10.10.25.155	On-line	V6.21.5.0_200617
☐	CH6	10.10.25.156	On-line	V31.35.7.1_210810
☐	CH7	10.10.25.157	On-line	V21.45.8.2.2_220416
☐	CH8	10.10.25.158	On-line	V31.35.8.2.2_220301
☐	CH10	10.10.25.160	On-line	V4.1.3.6_171027

Reboot IPC

In case of any issues, choose the camera(s) and then click "**Reboot IPC**" button to reboot selected camera(s).

5.7.4.4. Parameter Management

Upgrade
Load Default
Reboot IPC
Parameter Management
Format IPC

	Channel	IP Address	State	Software Version
☒	CH1	10.10.25.151	On-line	V21.45.7.0_210309
☒	CH2	10.10.25.152	On-line	V10.35.7.0_210412
☐	CH3	10.10.25.153	On-line	V14.45.5.0_200529
☐	CH4	10.10.25.154	On-line	V6.21.5.2_210309
☐	CH6	10.10.25.156	On-line	V31.35.7.1_210810
☐	CH7	10.10.25.157	On-line	V21.45.8.2.2_220416
☐	CH8	10.10.25.158	On-line	V31.35.8.2.2_220301


Save Settings
Load Settings

Select the camera(s), and then click "**Save Settings**" to export the configuration file containing all the settings that you have customized to your USB flash drive.

Load Settings: Click this button to import a configuration file containing all the settings that you have customized and apply to the selected camera(s).

5.7.4.5. Format IP Camera


To format the SD card installed on the supported IP camera.

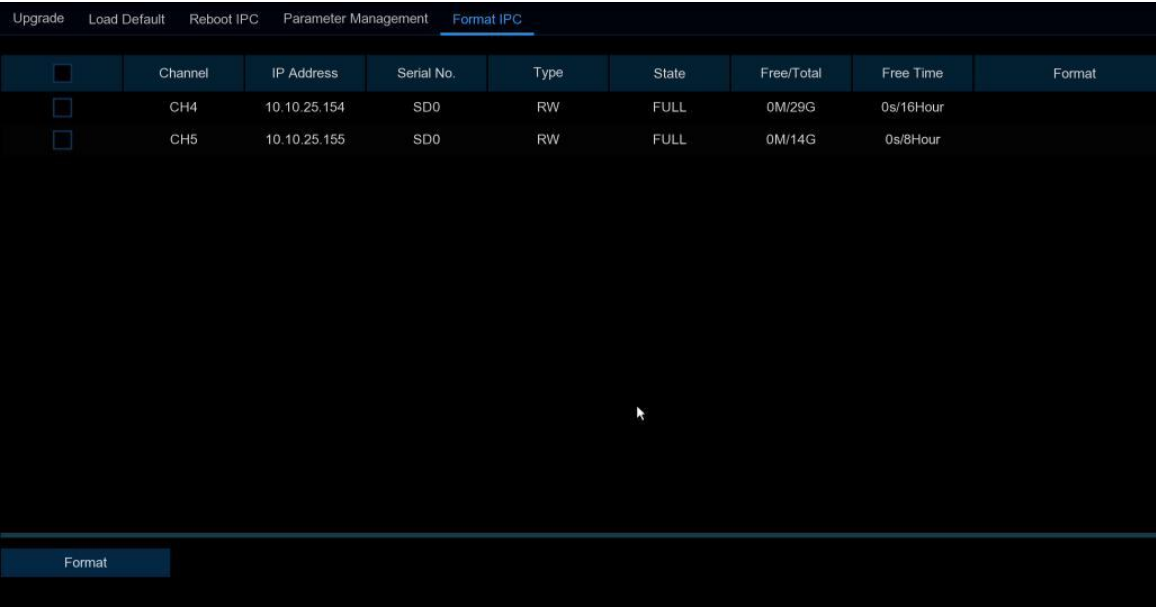

Select the camera, and then click "**Format**" to format its SD card.

5.7.5. System Information


In the System Information menu, you can view the system information, channel information, record information & network status.

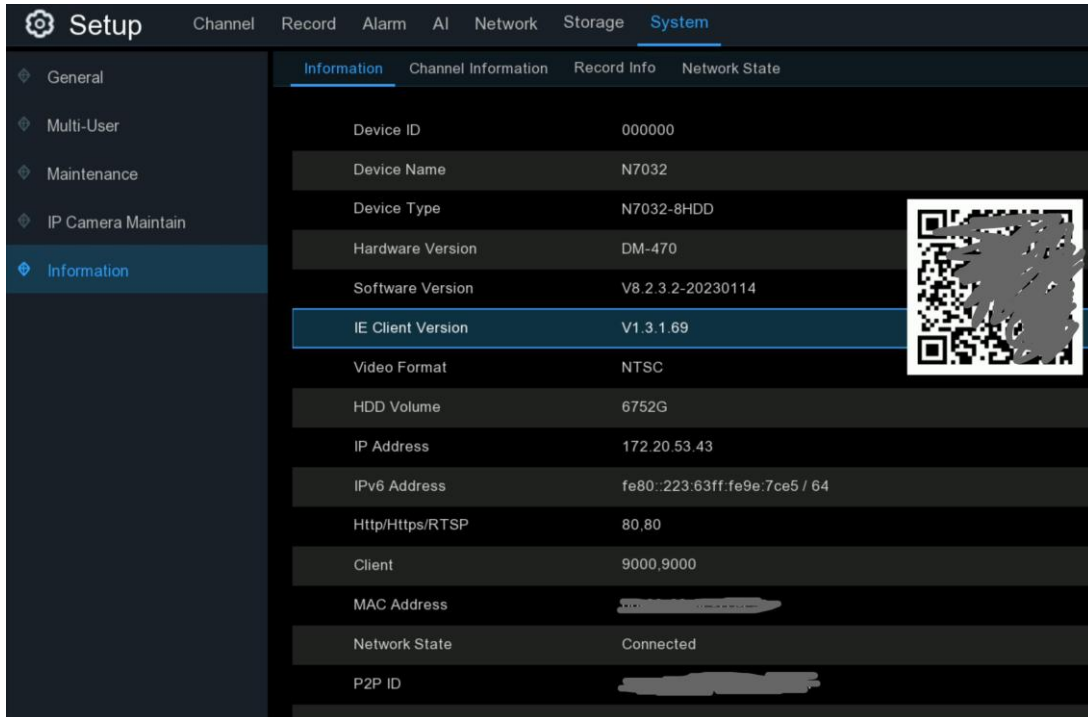

Information	Channel Information	Record Info	Network State
Device ID	000000		
Device Name	N7032		
Device Type	N7032-8HDD		
Hardware Version	DM-470		
Software Version	V8.2.3.2-20230114		
IE Client Version	V1.3.1.69		
Video Format	NTSC		
HDD Volume	6752G		
IP Address	172.20.53.43		
IPv6 Address	fe80::223:63ff:fe9e:7ce5 / 64		
Http/Https/RTSP	80,80		
Client	9000,9000		
MAC Address	[REDACTED]		
Network State	Connected		
P2P ID	[REDACTED]		

5.7.5.1. System Information

This tab displays technical information about your NVR, such as hardware/software version, IP address, network ports, MAC address, etc.

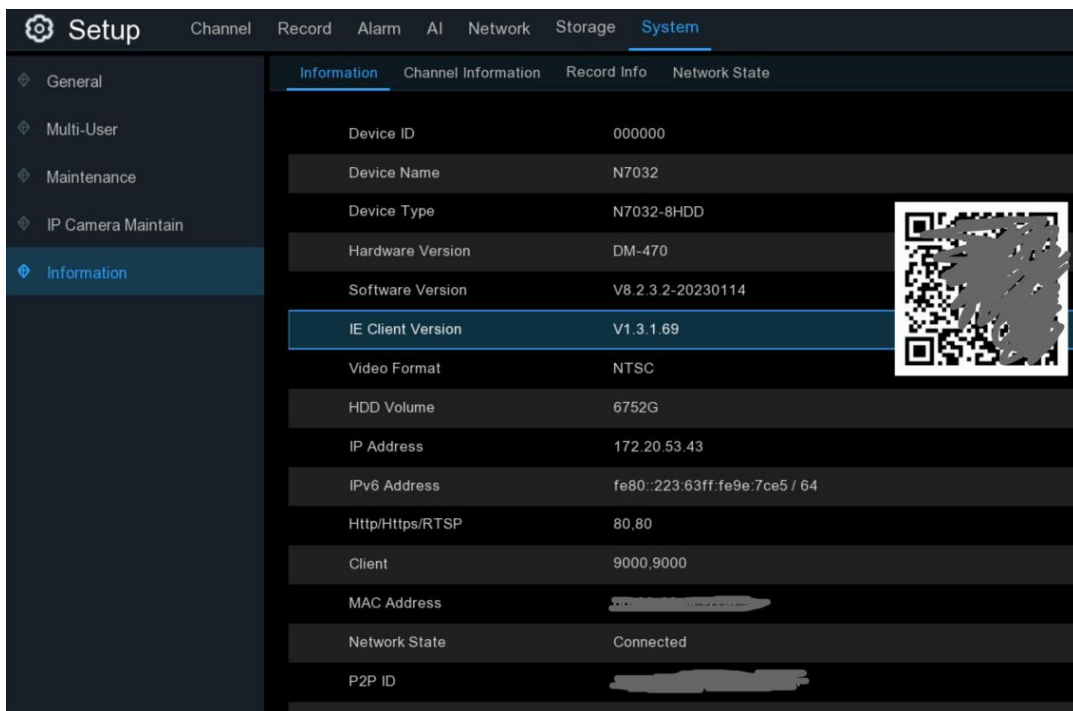

Information	Channel Information	Record Info	Network State
Device ID	000000		
Device Name	N7032		
Device Type	N7032-8HDD		
Hardware Version	DM-470		
Software Version	V8.2.3.2-20230114		
IE Client Version	V1.3.1.69		
Video Format	NTSC		
HDD Volume	6752G		
IP Address	172.20.53.43		
IPv6 Address	fe80::223:63ff:fe9e:7ce5 / 64		
Http/Https/RTSP	80,80		
Client	9000,9000		
MAC Address	[REDACTED]		
Network State	Connected		
P2P ID	[REDACTED]		

If your NVR supports P2P function, you will find the P2P ID & P2P QR code in the information page. You can scan this QR cord with mobile app to remote view the NVR.

5.7.5.2. Channel Information

View channel information for each connected camera such as alias, mainstream and substream recording specifications, motion detection status & privacy zone.

Information	Channel Information	Record Info	Network State				
Channel	Alias	State	Mainstream	Substream	Mobilestream	Motion Detection	Privacy Zone
CH1	CH1	On-line	2592x1944, 30Fps, 4Mbps	1280x 720, 20Fps, 1024Kbps	640x 480, 10Fps, 512Kbps	Support	Support
CH2	CH2	On-line	1920x1080, 25Fps, 4Mbps	1280x 720, 20Fps, 1024Kbps	640x 480, 25Fps, 512Kbps	Support	Support
CH3	CH3	On-line	3840x2160, 15Fps, 4Mbps	1280x 720, 10Fps, 1.5Mbps	Nonsupport	Support	Support
CH4	CH4	On-line	2592x1944, 15Fps, 4Mbps	640x 480, 15Fps, 2Mbps	Nonsupport	Support	Support

5.7.5.3. Record Information

View recording information for each connected camera such as bitrate, stream type, recording resolution and frame rate (FPS).

Information	Channel Information	Record Info	Network State				
Channel	Record State	Record Switch	Stream Type	Resolution	FPS	Bitrate	
CH1	ON	Enable	DualStream	2592x1944 1280x720	30Fps 20Fps	4Mbps 1024Kbps	
CH2	ON	Enable	DualStream	1920x1080 1280x720	25Fps 20Fps	4Mbps 1024Kbps	
CH3	ON	Enable	DualStream	3840x2160 1280x720	15Fps 10Fps	4Mbps 1.5Mbps	
CH4	ON	Enable	DualStream	2592x1944 640x480	15Fps 15Fps	4Mbps 2Mbps	

5.7.5.4. Network State

Displays the network settings used by your NVR.


Information	Channel Information	Record Info	Network State
Attribute		Value	
WAN			
IP Address		192.168.5.110	
Subnet Mask		255.255.255.0	
Gateway		192.168.5.1	
MAC Address		00-23-63-91-5B-FC	
IPv6 Address		fe80::223:63ff:fe91:5bfc / 64	
IPv6 Gateway		fe80::/64	
DHCP		Disable	
Internal Interface		Connected	
IP Address		10.10.25.100	
Subnet Mask		255.255.0.0	
DNS1		172.18.1.222	
DNS2		8.8.8.8	
PPPoE		Disable	
Port			
Http/Https/RTSP		13180,13180,Inactive,Disable	
Client		13181,13181,Inactive,Disable	
Total Band Width:		256Mbps	
Used Band Width:		58.488Mbps	

Total Bandwidth: Total input bandwidth available for the NVR.

Used Bandwidth: Used input bandwidth.


Chapter 6. AI Scenario

AI Scenario function provides AI applications for different specific scenarios. Click the submenu title in the main setup page to get into the individual function setup page.

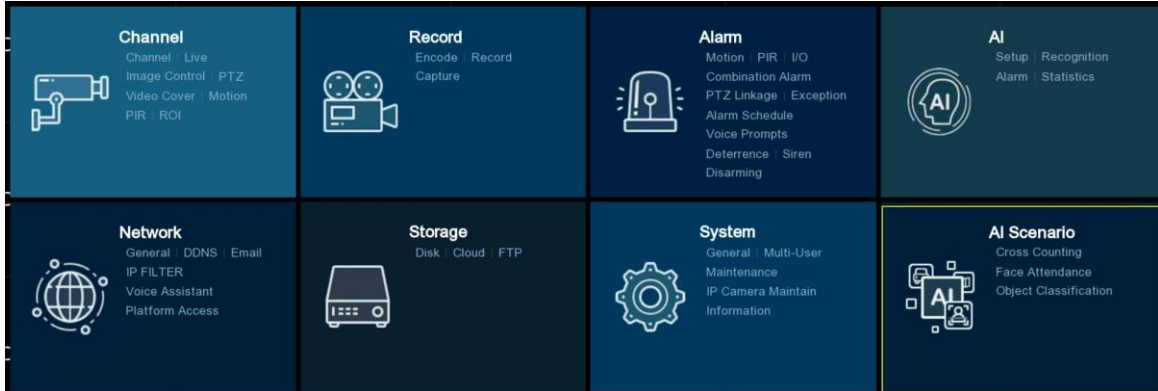

6.1. Cross Counting

This is an AI application based on cross counting function, which helps to control the attendance number of customers/visitors/vehicles in public places, like restaurants, parks, zoos, theaters, museums, car parks, etc.

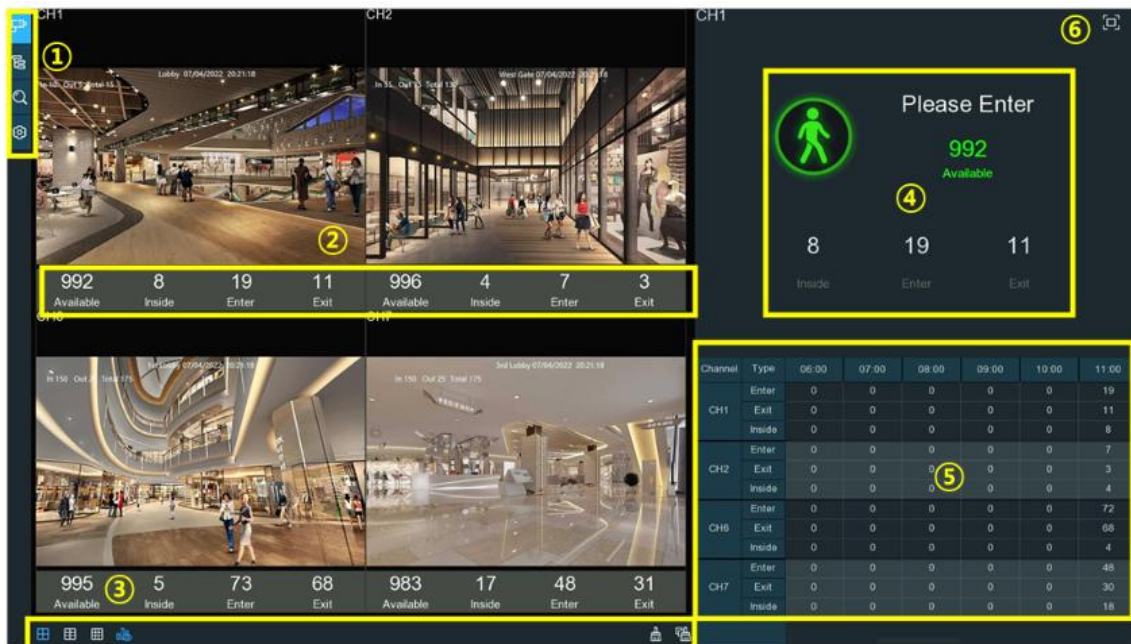

6.1.1. Real-time Display & Controls

1. Navigation Bar

Button	Function
	Channel View Mode: To count and view the real-time result by individual camera(s). Mostly used for small place with single entrance & exit.
	Group View Mode: To count and view the real-time result by group(s). Mostly used for big place with multiplex entrances & exits which are monitored by multiplex cameras.
	Data Search: To search the counting data
	Configuration: To configure the settings

2. Real-time Counting Statistics

Available: Remaining allowed attendance number

Inside: Current attendance number inside the control area

Enter: Recorded number of total entrants

Exit: Recorded number of total leaving attendance.

3. Screen Display Controls

Button	Function
  	Screen display layout of 4/6/9 channels. Continuously click a button to display next page.
	To show or hide the real-time data display.
	Clear counting data for the selected channel

Button	Function
	Clear counting data for all channels

4. Real-time Counting Statistics Information Bar

This bar will display the real-time counting statistics for the selected channel.

Available: Remaining allowed attendance number

Inside: Current attendance number inside the control area

Enter: Recorded number of the total entrants

Exit: Recorded number of the total leaving attendance.



If the available number is more than 0, the cartoon figure will be in green color.



If the available number is 0, the cartoon figure will be in red color.

5. Statistic Data Chart The all-day counting statistical data of all activated channels will be displayed here. Use the mouse wheel to move the timeline toward left or right.


Channel	Type	09:00	10:00	11:00	12:00	13:00	14:00
CH1	Enter	0	0	34	48	29	21
	Exit	0	0	28	8	15	17
	Inside	0	0	6	46	60	64
CH2	Enter	0	0	38	5	28	42
	Exit	0	0	27	16	28	29
	Inside	0	0	11	0	0	13
CH6	Enter	0	0	183	53	239	296
	Exit	0	0	165	63	210	293
	Inside	0	0	18	8	37	40
CH7	Enter	0	0	134	47	152	197
	Exit	0	0	118	63	147	197
	Inside	0	0	16	0	5	5

6. Full Screen Display

Click the  button to display the Real-time Counting Statistics Information Bar in full screen. Right click your mouse to exit.

6.1.2. Settings of Channel View Mode


1. Click the add icon + or setup icon to go to the configuration page.

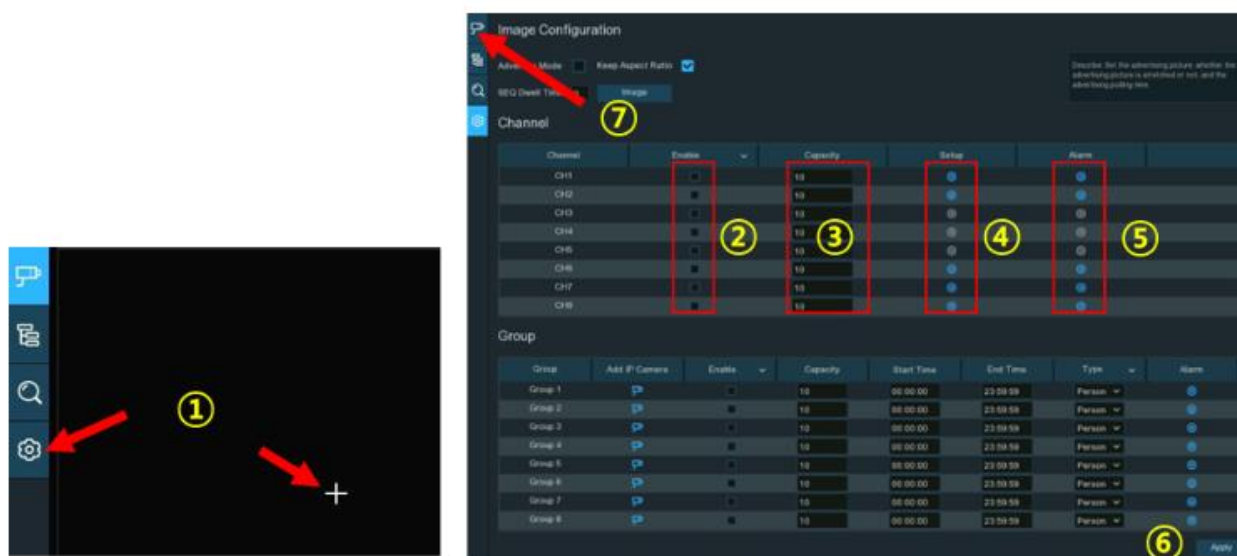

2. Tick the checkbox of **Enable** of the channel(s) you want to realize the counting. The Setup & Alarm icon will be in blue color if the camera in that channel supports AI function; on the contrary if the camera doesn't support AI function, the icon will be in grey color.

3. Set the **Capacity** number for each channel, which is the maximum limitation of the attendance.
4. Click the **Setup** button 4. of the camera that you want to configure the detection conditions. Check more on **5.4.1.5. CC (Cross Counting Detection)**.

5. Click the **Alarm** setup button of the camera that you want to configure the alarm actions when the Available number is 0.

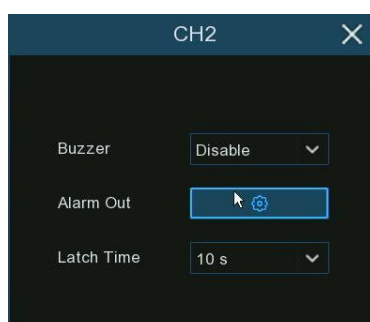


Buzzer: Set the buzzer duration in seconds when the Available number is 0.

Alarm Out: If your NVR support to connect to external alarm device, you can set to emit an alarm tone.

Latch Time: To configure the external alarm time when the Available number is 0. Right click your mouse to exit the alarm setup page, and then click **Save** button to save the settings.

6. Click **Apply** to save.

7. Click the **Channel View** icon to view the live images & counting data of all activated channels.

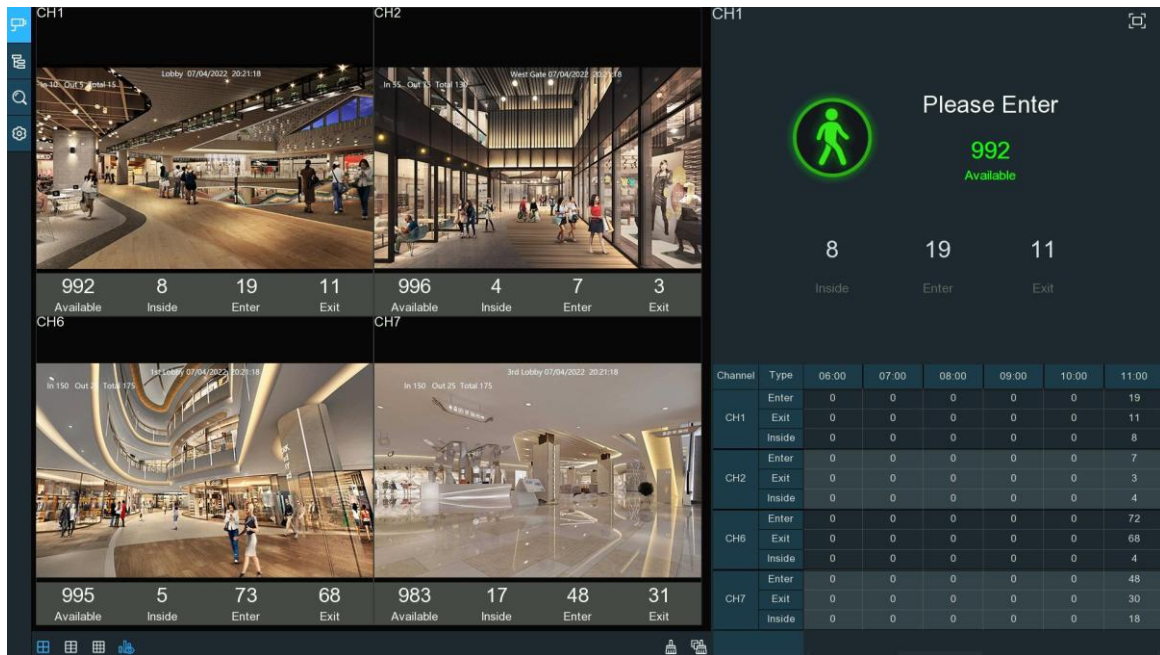

The screenshot displays the Channel View interface with four live camera feeds and their corresponding counting data. The interface includes a sidebar with navigation icons and a main display area.

Channel 1 (CH1) Data:

Channel	Type	06:00	07:00	08:00	09:00	10:00	11:00
CH1	Enter	0	0	0	0	0	19
	Exit	0	0	0	0	0	11
	Inside	0	0	0	0	0	8

Channel 2 (CH2) Data:

Channel	Type	06:00	07:00	08:00	09:00	10:00	11:00
CH2	Enter	0	0	0	0	0	7
	Exit	0	0	0	0	0	3
	Inside	0	0	0	0	0	4

Channel 6 (CH6) Data:


Channel	Type	06:00	07:00	08:00	09:00	10:00	11:00
CH6	Enter	0	0	0	0	0	72
	Exit	0	0	0	0	0	68
	Inside	0	0	0	0	0	4

Channel 7 (CH7) Data:


Channel	Type	06:00	07:00	08:00	09:00	10:00	11:00
CH7	Enter	0	0	0	0	0	48
	Exit	0	0	0	0	0	30
	Inside	0	0	0	0	0	18

6.1.3. Settings of Group View Mode

1. Click the add icon or setup icon to go to the configuration page.

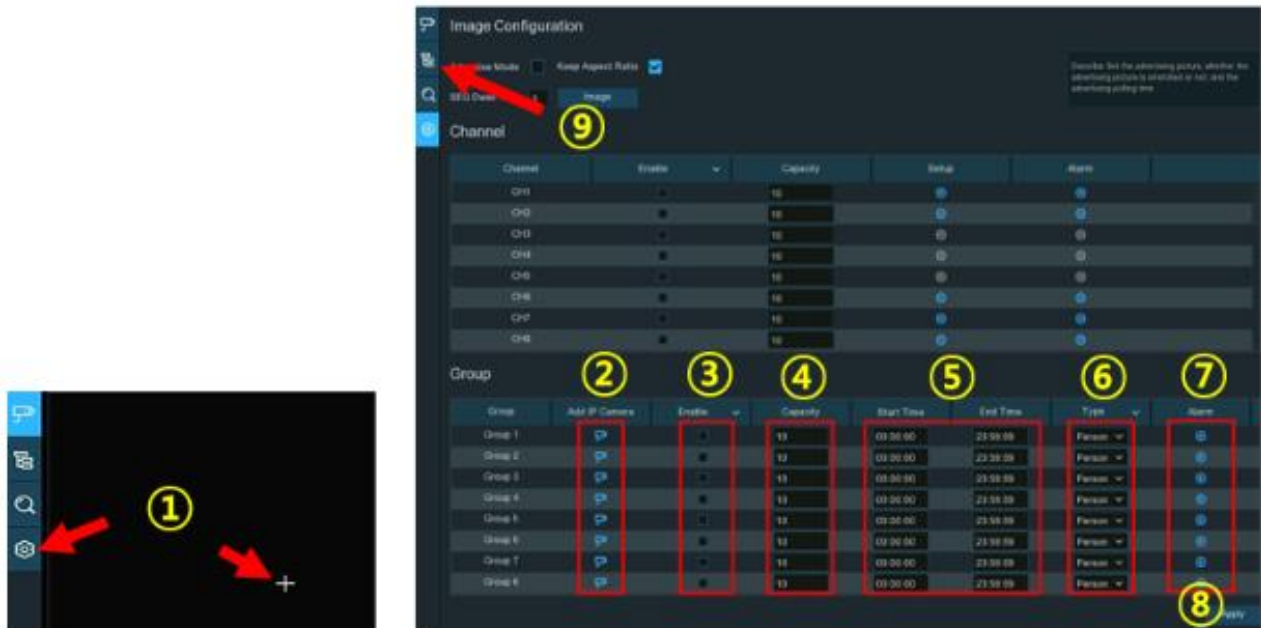

2. Click the Add IP Camera icon to add channel(s) to the group. Max. 8 groups can be set, and each individual channel can be added to 1 group only. If a channel is enabled in the Channel View mode, it will be not allowed to add to any group.
3. Tick the checkbox of **Enable** of the group you want to activate.
4. Set the **Capacity** number for each group, which is the maximum limitation of the attendance.
5. Set the **Start/End Time** of each group.
6. Choose the detection targeted **Type** from **Person**, **Vehicle** or **Motion**.
7. Click the **Alarm** setup button 7. of the group that you want to configure the alarm actions when the Available number is 0.



Buzzer: Set the buzzer duration in seconds when the Available number is 0.


Alarm Out: If your NVR support to connect to external alarm device, you can set to emit an alarm tone.

Latch Time: To configure the external alarm time when the Available number is 0.


Right click your mouse to exit the alarm setup page, and then click **Save** button to save the settings.

8. Click **Apply** to save.


9. Click the **Group View** button to view the live images & counting data of all activated groups.

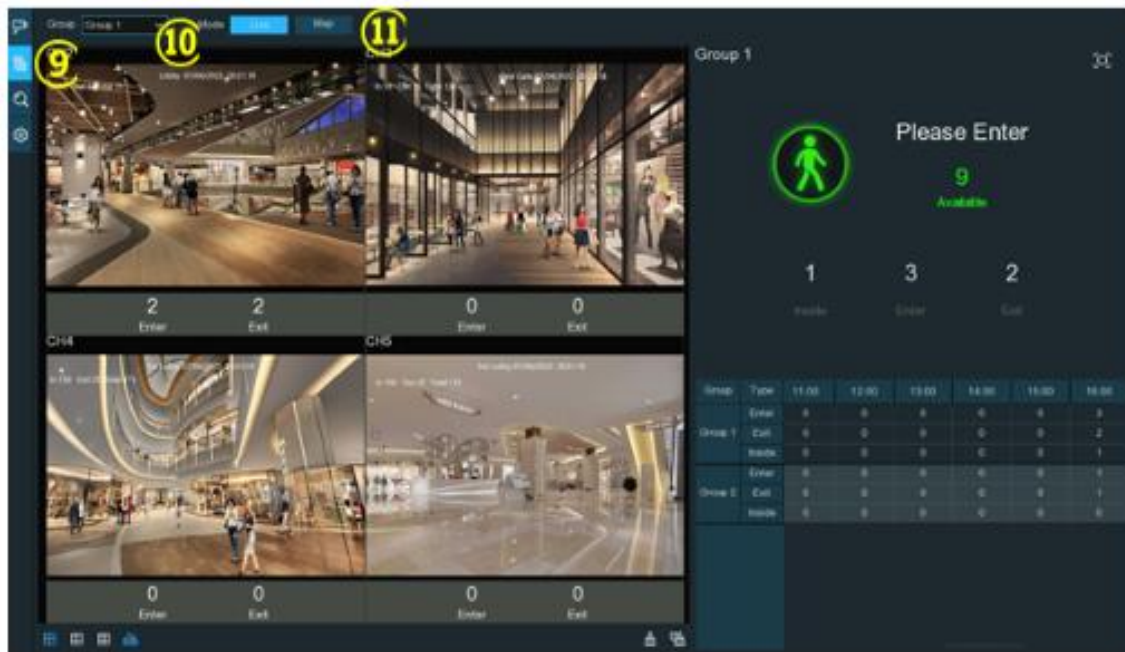

10. You can choose which group you want to view the real-time live images and counting data.



11. Furthermore, it supports to display the counting data in Map mode. Click the **Map** button to configure the settings.

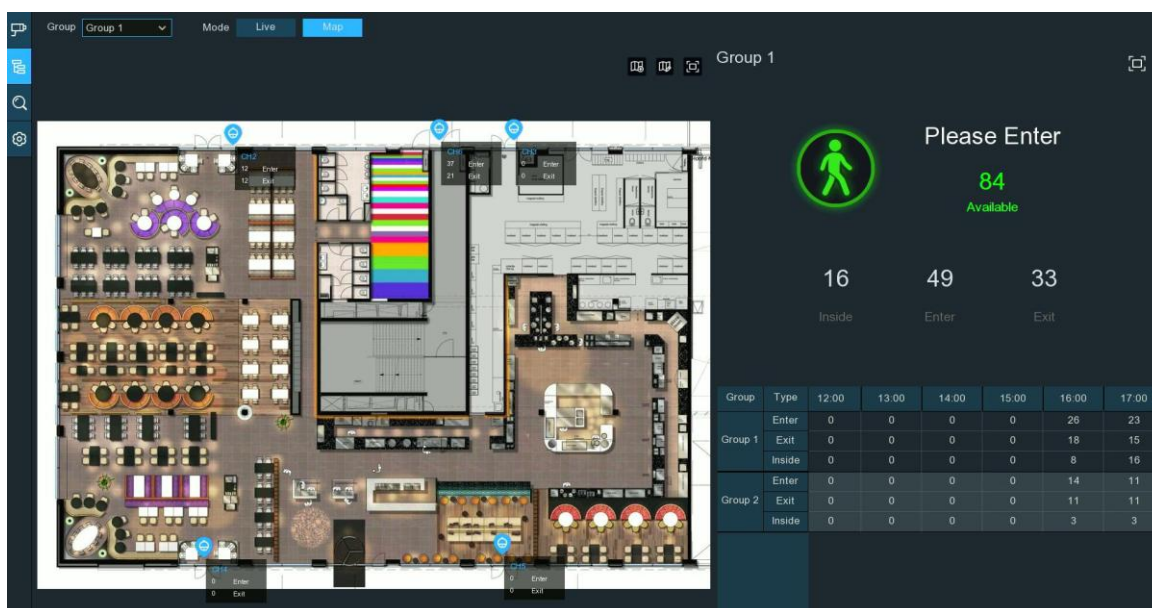

Click  button to add a map image from your USB memory.


Click  button to adjust the site of the IP cameras. Click and hold the channel icon and move one by one to adjust the position of your IP cameras on the map.

You can click  button to display the map in full screen, click  button to exit full screen.

6.1.4. Advertise Mode

The system supports to demonstrate your advertising pictures with the Cross Counting functions.

1. Click the Configuration button in the Navigation bar to go to the configuration page.
2. Tick the checkbox of "**Advertise Mode**".

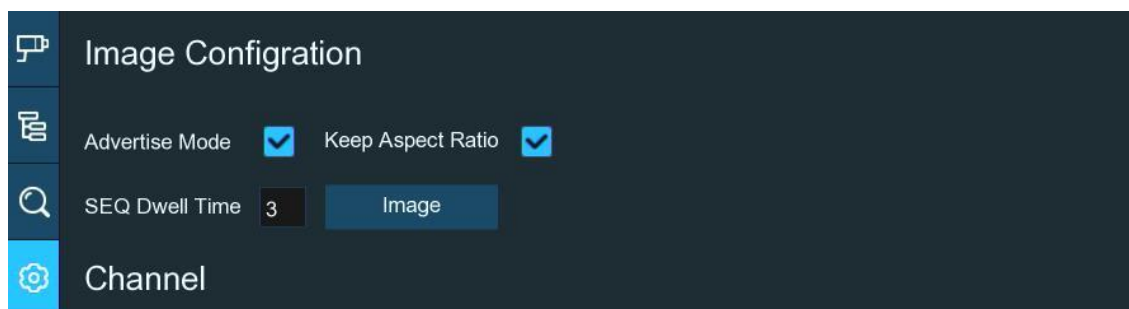

3. Click "**Image**" button to load advising pictures from your USB flash drive. It supports to add maximum 16 pictures with jpg, png or bmp format, and the maximum resolution should be no more than 2560x1600. Click the add button to add new picture(s) and click delete icon to delete the added picture one by one. Click the close button or right click your mouse to go back to previous configuration page.



4. Tick the checkbox of "**Keep Aspect Ratio**" if you want to display the images with their original aspect ratio. Uncheck the box if you want the pictures to be stretched and displayed full screen.
5. Set the "**SEQ Dwell Time**" in seconds which will decide how long each picture will stay in the screen.
6. Click "**Apply**" button to save your settings.
7. Go back to Channel View mode or Group View mode, click the full screen button on the right upper corner to display your advertising pictures and the real-time counting data for the selected channel(s) or group(s).



6.1.5. Search Counting Data

1. Click **Search** button in the Navigation bar to search page.
2. It is allowed to search for Channels or Groups separately. Choose the channel(s) or group(s) you want to search, set the search duration by day, by week, by month or by year and then choose the targeted type you want to search. Click the search button , the result will be displayed on the right side of the window.



 Click to display the result in column chart

 Click to display the result in tendency chart

 Click to display the result in detail chart


 Click to export the result into your USB flash drive

6.2. Face Attendance

Face Attendance is an AI application based on face detection function. You're able to view and check the real-time statistical data of attendance management visually.



1. Customized title of the face attendance.
2. Overall attendance statistical data of all selected groups.
3. Individual attendance statistical data of each selected group:
 - The total number of people who need to check attendance
 - The number of people who have checked attendance already
 - The number of people who haven't checked attendance.
4. Live view screen: to display the live camera images. Click the screen split buttons to change the display layout. Continuously click a button to display next page.
5. Push notifications of latest persons who have checked the attendance, including the Name/ID of the person, captured face image, group, clock in time and clock out time. Normal clock in & clock out time will be displayed in green color. Abnormal check-in & check-out time will be displayed in red color. Click the screen split icons to change the display layout.
6. Click search icon to search the face attendance data. Check more on **7.1.9.6 Face Attendance**. Click Setting icon to configure the face attendance settings:

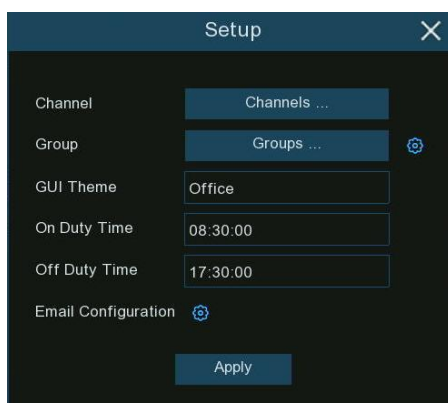

The Setup window contains the following fields and buttons:

- Channel:** A button labeled "Channels ...".
- Group:** A button labeled "Groups ..." with a gear icon to its right.
- GUI Theme:** A dropdown menu currently showing "Office".
- On Duty Time:** A text input field showing "08:30:00".
- Off Duty Time:** A text input field showing "17:30:00".
- Email Configuration:** A button with a gear icon.
- Apply:** A button at the bottom center.

Channels: Click to choose face attendance channel(s)


Group: Click to choose face attendance group(s). If you want to edit the group database, click the icon to edit. Check more on **5.4.2.2. Face Recognition Database Management**.

GUI Theme: To give a customized title to the face attendance.

On Duty Time: To set the on-duty time.

Off Duty Time: To set the off-duty time.

Email Configuration: To send the attendance statistical data by email. click the icon to edit the email configuration.

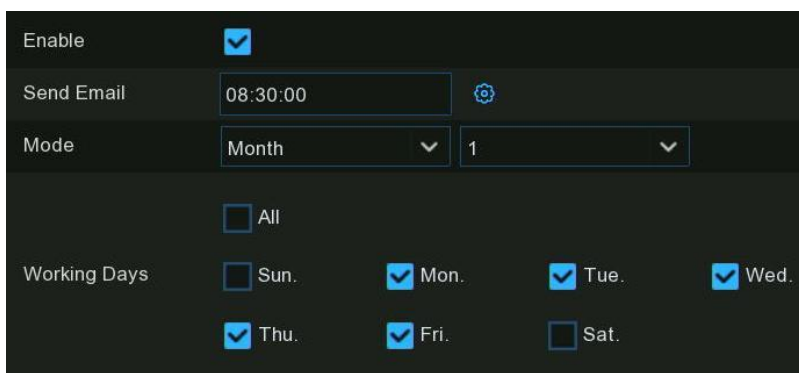

The Email Configuration window contains the following fields and checkboxes:

- Enable:** A checked checkbox.
- Send Email:** A text input field showing "08:30:00" with a gear icon to its right.
- Mode:** Two dropdown menus. The first shows "Month" and the second shows "1".
- Working Days:** A grid of checkboxes for days of the week:
 - ☐ All
 - ☐ Sun.
 - ☒ Mon.
 - ☒ Tue.
 - ☒ Wed.
 - ☒ Thu.
 - ☒ Fri.
 - ☐ Sat.

Enable: Check the box if you want to send the attendance statistical data by email.

Send Email: Set the preset time for sending the email.

Mode: Choose to send the email once in every **Day**, every **Week**, or every **Month**.

Day: Send the attendance statistical data of previous day once a day.

Week: Send the attendance statistical data of last 7 days once a week.

Month: Send the attendance statistical data of last month once a month.

Working Days: To select the working days. It will affect the attendance statistical data.

Click the setting button to configure your email configuration. Check more on **5.5.3.1 Email Configuration**.

6.3. Object Classification

Object Classification is an AI application based on face detection, human and vehicle function, which is used to classify and count the number of detected faces, human beings, motor vehicles and non-motor vehicles in a certain period.



1. Customized title of the object classification.
2. Live view screen: to display the live camera images. Click the screen split buttons to change the display layout. Continuously click a button to display next page.
3. Notifications of detected face images. Use the mouse wheel to move up and down.
4. Notifications of detected human images. Use the mouse wheel to move up and down.
5. Notifications of detected motor vehicles. Use the mouse wheel to move left and right.
6. Notifications of detected non-motor vehicles. Use the mouse wheel to move left and right.
7. Statistical data of detected objects in a selected period.
8. Click the icons to display or hide relative object:


  To display or hide face images.

  To display or hide human images.

  To display or hide motor vehicle images.

  To display or hide non-motor vehicle images.

9. Click search icon to search the recording of human & vehicle detection events. Check more on **7.1.9.3 Human & Vehicle**. Click Setting icon to configure the object classification settings:

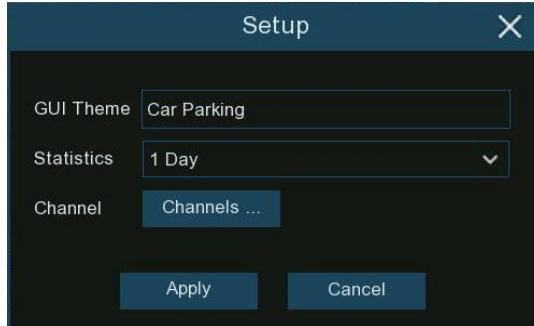A screenshot of a 'Setup' dialog box with a dark background. The dialog has a title bar with the word 'Setup' and a close button (X). Inside, there are three settings: 'GUI Theme' with a text input field containing 'Car Parking'; 'Statistics' with a dropdown menu showing '1 Day'; and 'Channel' with a button labeled 'Channels ...'. At the bottom, there are two buttons: 'Apply' and 'Cancel'.

GUI Theme: To give a customized title to the object classification.


Statistics: To select the time period you want to show the data.

Channels: Click to choose channel(s) of which you want to show the data

Chapter 7. Search, Playback & Backup

Search button in the **Start Menu** to enter search section.

The Search function gives you the ability to search for and play previously recorded videos as well as snapshots that are stored on your NVR's hard drive(s). You have the choice of playing video that matches your recording schedule, manual recordings or alarm events. The Backup function gives you the ability to save important events (both videos and snapshots) to a USB flash drive.

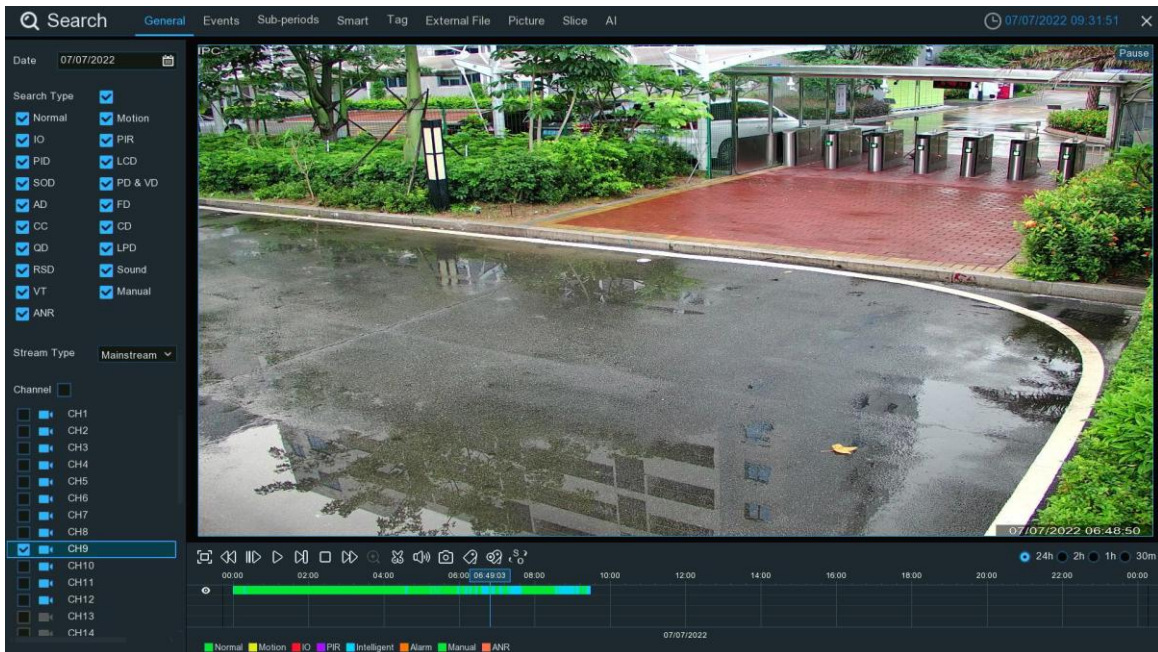

7.1. Search & Play in General



1. Search Options: the system provides various search & playback methods: General, Events, Sub-periods, Smart, Tag, External File, Picture, Slice & AI. Click the tab to search different event recordings.

2. **Search Date:** click the calendar icon to select a date to search on. A red underline on a date indicates recordings on those particular dates.
3. **Search Type:** this is the event type that you can search for. You can leave all event types enabled if you want to search for all, or you can select specific event types to narrow your search.
4. Select the video stream to search for. Mainstream is the default option. Substream can be selected if dual-stream recording is enabled.
5. **Channel Selection:** to choose the channels you want to search & play.
6. **Playback Control Bar:** to control the video playback.



Button	Function
	Enlarge the video playback to full screen
	Rewind button, subsequent presses of the button will change the rewind speed.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed
	Pause
	Play frame by frame. Click once to play a frame of the video
	Fast forward button, subsequent presses of the button will change the speed.
	Select a camera, click this button then use the scroll button on the mouse to zoom. Use the picture-in-picture screen to select a different area to view. Right-click to exit.
	This button allows you to edit the video by setting mark in and mark out points which you can then copy to a USB flash drive. View more on 7.1.1. Video Segment Backup .

Button	Function
	Click to adjust audio output volume
	Click to take a snapshot and save to your USB flash drive
	Tagging allows you to record information such as a person or object within the video. Click on a camera to select, pause the video when you see a person or object to be tagged, then press this button (multiple tags can be created).
	Same as above, but you can name the tag.
	Click to switch the image scale for all playing cameras between original and stretch.

7. **Timeline:** Quick locate the playback position by clicking on the time line. You can zoom in or zoom out the timeline by using the timeframe options for precise location.




8. Indicates the video type on the timeline.



9. **Playback Status:** display the playing status.


7.1.1. Video Segment Backup

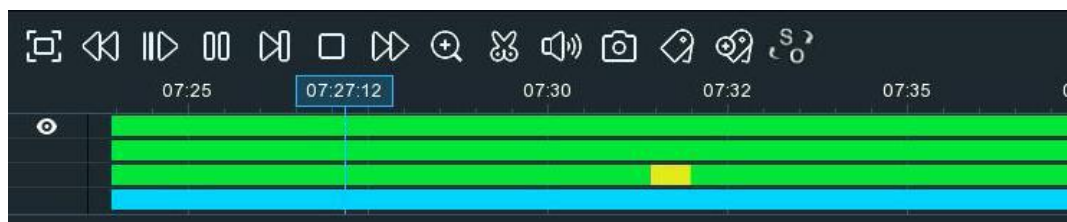


1. Insert your USB flash drive to the NVR.
2. Search & start a video recording playback.
3. Move your mouse cursor and click on the timeline where you want to cut a segment.
4. Click cut button. You will see two white triangles on the timeline. Move them left or right on the section of the video that you want to edit. If want to select multiplex channels, you can click on the position of the start time, and then hold and drag your mouse to select more channels, release your mouse at the position of the end time.



5. The cut icon is changed to save icon now, click to save the video segment.
6. Select a file type for your backup files, and then click **Save** button to save the video segment(s). Please make sure your USB driver has enough space to save the video segment(s).

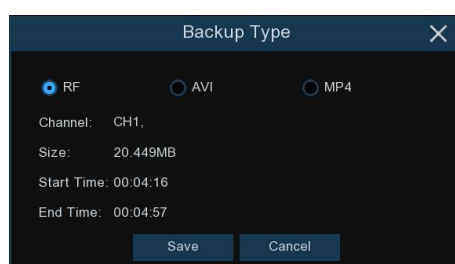

7. Choose the directory in your USB flash drive where you want to save the video segment(s), and then click **OK**. The progress bar at the bottom of the window shows the backup progress.

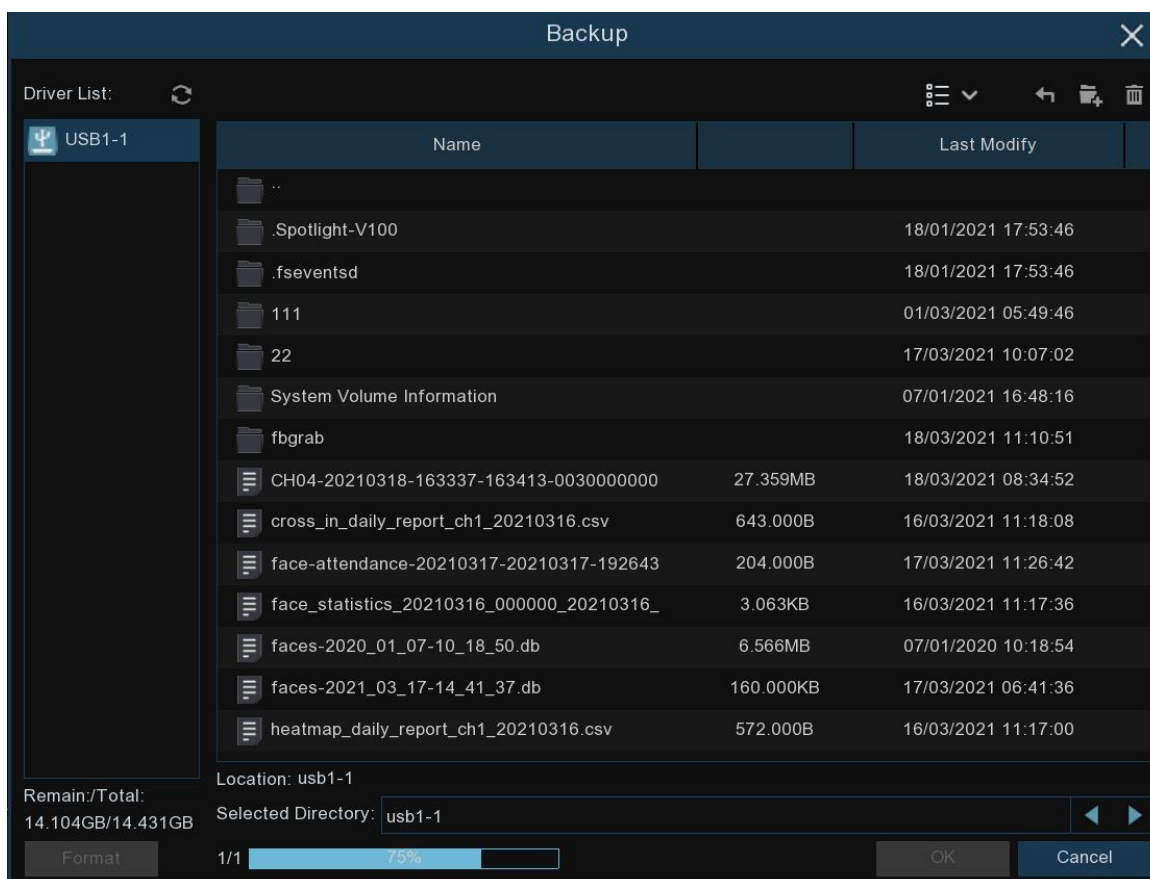

7.2. Search, Play and Back Up Event Recordings

Event search lets you view a list of video recordings with the channel, start and end time, and recording type conveniently summarized. You can also quickly back up events to a USB flash drive.




1. Click the **Events** tab.
2. Click the calendar icon to select a date to search on. A red underline on a date indicates recordings on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time.
3. **Search Type:** this is the event type that you can search for. You can leave all event types enabled if you want to search for all, or select specific event types to narrow your search.
4. Select the video stream to search for. Mainstream is the default option. Substream can be selected if dual-stream recording is enabled.
5. Select from one or all cameras that you would like to search on. A blue camera indicates which cameras match your search criteria.
6. Click Search button to commence a search.
7. You will see a thumbnail of each event that matches your search criteria displayed on the result window. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
8. Click these buttons to change how the events are displayed. The default view is Thumbnail but, you can change it to List or Detail. In the detailed view mode, you can lock the events to keep them from being overwritten in the hard disk drive. Click the icon to lock or click to unlock the events.

☒	11	CH11	SMN	07/07/2022	07:54:02	07:54:32	7.93MB		
☒	12	CH11	MN	07/07/2022	07:54:28	07:55:04	9.52MB		
☒	13	CH11	SMN	07/07/2022	07:54:58	07:55:36	10.00MB		

9. Tick the checkbox to view the events in descending order.

10. Click on an event thumbnail, relative information will be displayed on the left bottom corner.
11. Tick the checkbox above each event thumbnail to select it, or tick the checkbox of "**Select**" to select all events in current page.
12. The number and total size of selected event(s) will be displayed here.
13. Click backup button to save all selected events to your USB flash drive directly. Or you can click play button to enter the playback window. See more on **7.2.1. Event Playback Control**.

7.2.1. Event Playback Control

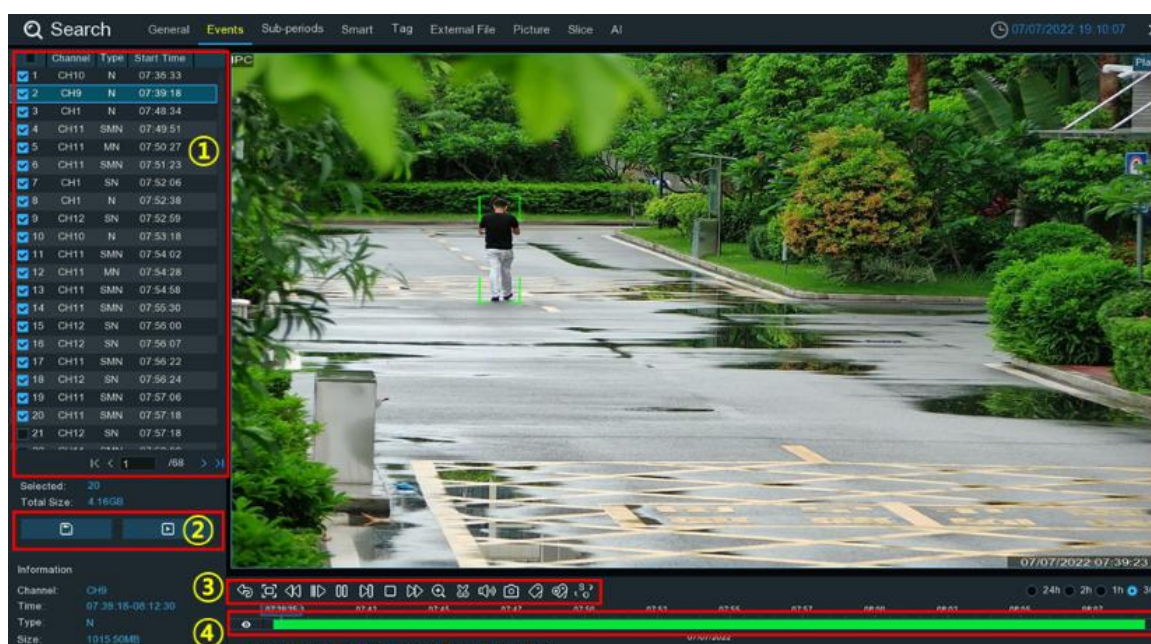

1. Event List, you can select the events here. Use the arrow buttons to turn page or use the keypad to navigate to a specific page. Double-click on an event to play it directly.
2. Click icon to save selected events to your USB flash drive. Click button to play selected events.
3. **Video Playback Controls:** to control the video playback.



Button	Function
	Return to event search page
	Enlarge the video playback to full screen

Button	Function
	Rewind button, subsequent presses of the button will change the rewind speed.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed
	Pause
	Play frame by frame. Click once to play a frame of the video
	Stop playing
	Fast forward button, subsequent presses of the button will change the speed.
	Select a camera, click this button then use the scroll button on the mouse to zoom. Use the picture-in-picture screen to select a different area to view. Right-click to exit.
	This button allows you to edit the video by setting mark in and mark out points which you can then copy to a USB flash drive. View more on 7.1.1. Video Segment Backup.
	Click to adjust audio output volume
	Click to take a snapshot and save to your USB flash drive
	Tagging allows you to record information such as a person or object within the video. Click on a camera to select, pause the video when you see a person or object to be tagged, then press this button (multiple tags can be created).

Button	Function
	Same as above, but you can name the tag.
	Click to switch the image scale for all playing cameras between original and stretch.

4. Timeline: Quick locate the playback position by clicking on the time line. You can zoom in or zoom out the timeline by using the timeframe options for precise location.



7.3. Sub-periods Playback

Sub-periods playback allows you to play multiple video segments with different time periods simultaneously from a single channel. The recordings in selected time period are divided evenly depending on the split-screen mode that has been selected. For example, if the time length of the video is an hour and Split-screens is 4, the video will be divided in to 4 segments with length of 15 minutes and played individually in each screen.



1. Click the **Sub-periods** tab.
2. Click the calendar icon to select a date to search on. A red underline on a date indicates recordings were taken on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time.
3. Select a number on the Split-screens, it indicates the number that how many video segments you want the recordings to be divided evenly and played in each screen.
4. Check the recording types you want to search, or tick the checkbox of "**Search Type**" to select all.
5. Select the video stream to search for. Mainstream is the default option. Substream can be selected if dual-stream recording is enabled.
6. Choose the channel you want to search. It supports to search & play one channel only at a time.
7. Click the play button to start playing.



Button	Function
	Enlarge the video playback to full screen
	Rewind button, subsequent presses of the button will change the rewind speed.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed
	Pause
	Play frame by frame. Click once to play a frame of the video
	Stop playing
	Fast forward button, subsequent presses of the button will change the speed.
	Select a camera, click this button then use the scroll button on the mouse to zoom. Use the picture-in-picture screen to select a different area to view. Right-click to exit.
	This button allows you to edit the video by setting mark in and mark out points which you can then copy to a USB flash drive. View more on 7.1.1. Video Segment Backup.
	Click to adjust audio output volume
	Click to take a snapshot and save to your USB flash drive

Button	Function
	Tagging allows you to record information such as a person or object within the video. Click on a camera to select, pause the video when you see a person or object to be tagged, then press this button (multiple tags can be created).
	Same as above, but you can name the tag.
	Click to switch the image scale for all playing cameras between original and stretch.

8. Click on any one of the split-screens, the time period of the video split-screen will be displayed on the timeline. The color bar on the top of the timeline indicates the time span of the video split-screen you have clicked. The color bar on the bottom of the timeline indicates the time span for the whole recordings you have searched.



7.4. Smart Search & Playback

With Smart search function, you will be able to quickly search and play the motion events in a supported camera, no matter the motion detection is enabled in this camera or not. Especially, it allows you to define one or more specific areas of the video, to make it easier to find what you are searching for.



Click the **Smart** tab. 1. 2. Click the calendar icon to select a date to search on. A red underline on a date indicates recordings were taken on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time. Check the recording types you want to search, or tick the checkbox of "**Search Type**" to select all. 3. 4. Choose the channel you want to search. It supports to search & play one channel only at a time. 5. The Smart search result will be displayed in the time slot in dark blue color.



6. Click the play button to start playing.



Button	Function
	Enlarge the video playback to full screen, right-click to restore.

Button	Function
	Rewind button, subsequent presses of the button will change the rewind speed.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed
	Pause
	Play frame by frame. Click once to play a frame of the video
	Stop playing
	Fast forward button, subsequent presses of the button will change the speed.
	Select a camera, click this button then use the scroll button on the mouse to zoom. Use the picture-in-picture screen to select a different area to view. Right-click to exit.
	This button allows you to edit the video by setting mark in and mark out points which you can then copy to a USB flash drive. View more on 7.1.1. Video Segment Backup .
	Click to adjust audio output volume
	Click to take a snapshot and save to your USB flash drive
	Smart Search button.

Button	Function
	Tagging allows you to record information such as a person or object within the video. Click on a camera to select, pause the video when you see a person or object to be tagged, then press this button (multiple tags can be created).
	Same as above, but you can name the tag.
	Click to switch the image scale for all playing cameras between original and stretch.

7. It supports to narrow the search by define one or more specific areas of the video. Click the button on the Playback Control bar, the camera will be shown full screen, and the Smart mode controls will be visible.

 Select a full-screen detection area.

 Delete all areas created.

 Search and play video based on the areas defined.

 Return to the playback interface.

To define one or more specific areas, please do the following:

Click button to delete all areas, and then drag to select the area that you want to define. Multiple areas can be defined.

When finished, click the Search button to search recordings based on the areas defined. You'll be returned back to the playback interface. Segments matching your search criteria will be shown on the timeline in dark blue color.



7.5. Tag Search & Playback

You can search, play and manage the contents by tags that you added in live view or playback.




1. Click the **Tag** tab.
2. Click the calendar icon to select a date. A red underline on a date indicates tags were created on those particular dates. For time, you can use the keypad to enter a specific start and end time.
3. If you have created one or more customized tags, click this to input the tag name (tag names are case sensitive).
4. Select the channel(s) you want to search.
5. Click button to search.
6. Tags matching your search criteria will be displayed on the right window.
7. Click the play button to start playing.



8. If you want to modify the tag name, click edit button. Click button to delete the tag.

7.6. Play External File

The NVR supports to play the videos that you have copied to a USB flash drive.

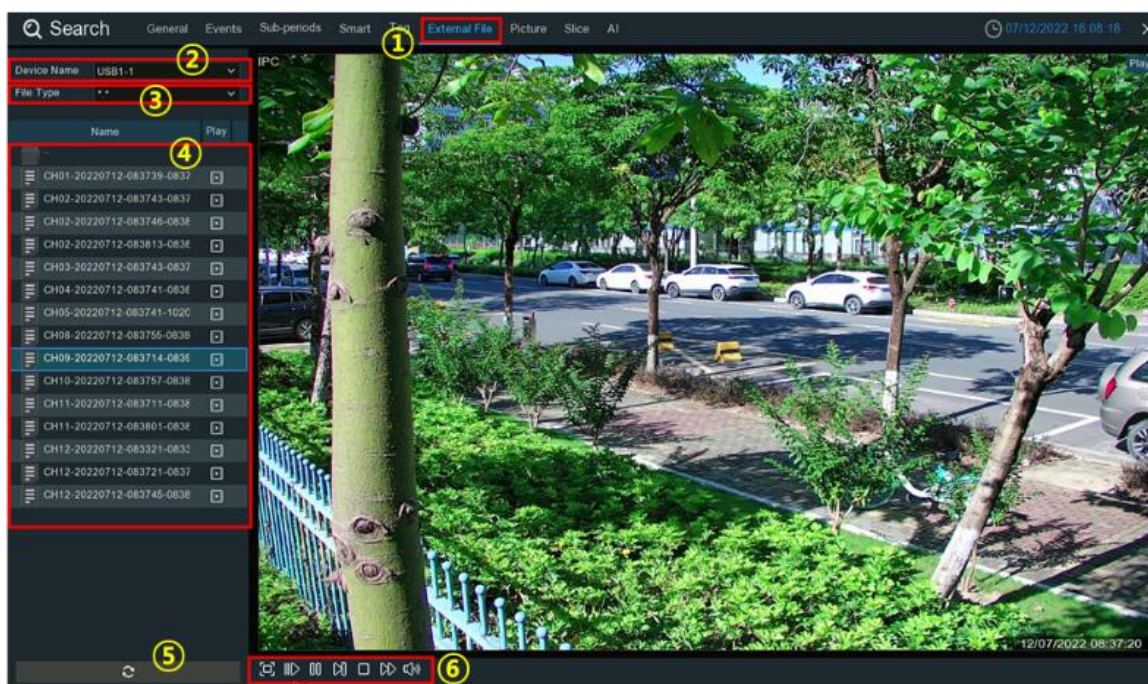


1. Click the **External File** tab.
2. If multiple USB flash drives are connected, click the drop-down menu to select the drive that you want to read from.
3. Select the file type you want to search and play. Leave default to search all supported formats.
4. Select the directory folder where the video files are saved. Double-click an event to play.
5. If you want to refresh the USB flash drive, click this button.
6. Play control buttons:

Button	Function
	Enlarge the video playback to full screen, right-click to restore.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed

Button	Function
	Pause
	Play frame by frame. Click once to play a frame of the video
	Stop playing
	Fast forward button, subsequent presses of the button will change the speed.
	Click to adjust audio output volume

7.7. Search & View Snapshots


This function can be used to search, view and copy snapshots to a USB flash drive.

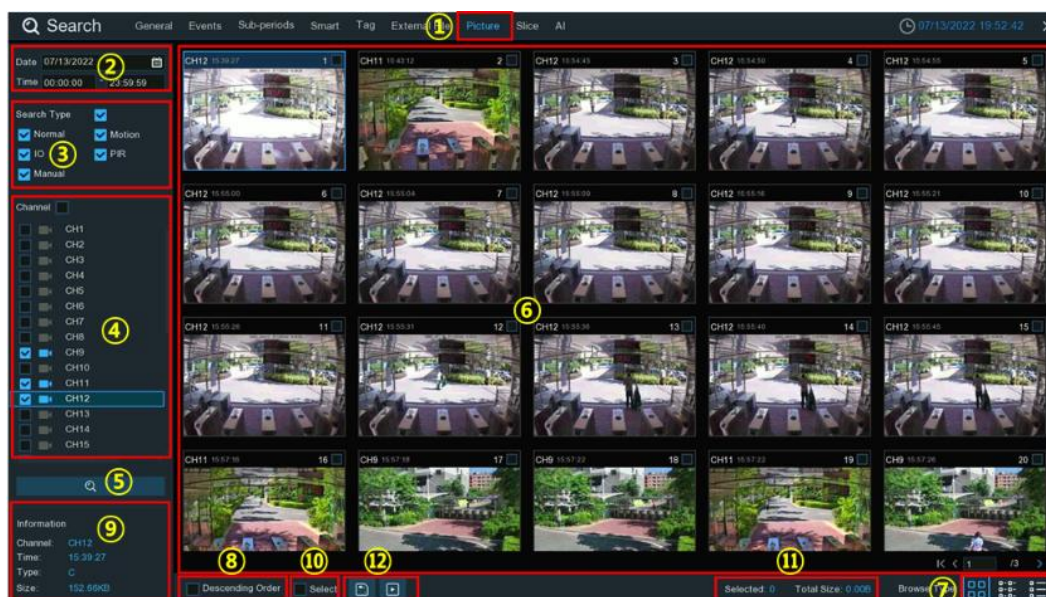

1. Click the **Picture** tab.
2. Click the calendar icon to select a date to search on. A red underline on a date indicates snapshots were taken on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time.
3. **Search Type:** this is the event type that you can search for. You can leave all event types enabled if you want to search for all, or select specific event types to narrow your search.
4. Select from one or more cameras that you would like to search on. A blue camera indicates which cameras match your search criteria.
5. Click Search button to commence a search.
6. You will see a thumbnail of each snapshot that matches your search criteria displayed on the result window. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
7. Click these buttons to change how the snapshots are displayed. The default view is Thumbnail but, you can change it to List or Detail.
8. Tick the checkbox to view the snapshots in descending order.
9. Click on a thumbnail, relative information will be displayed on the left bottom corner.
10. Tick the checkbox above each snapshot thumbnail to select it or tick the checkbox of "**Select**" to select all snapshots in current page.
11. The number and total size of selected snapshot(s) will be displayed here.
12. Click backup button to copy all selected snapshots to your USB flash drive directly. You can click play button to enter the slideshow window. See more on **7.7.1. Playing Slideshow**.

7.7.1. Playing Slideshow

The selected snapshots will be played in a slideshow.

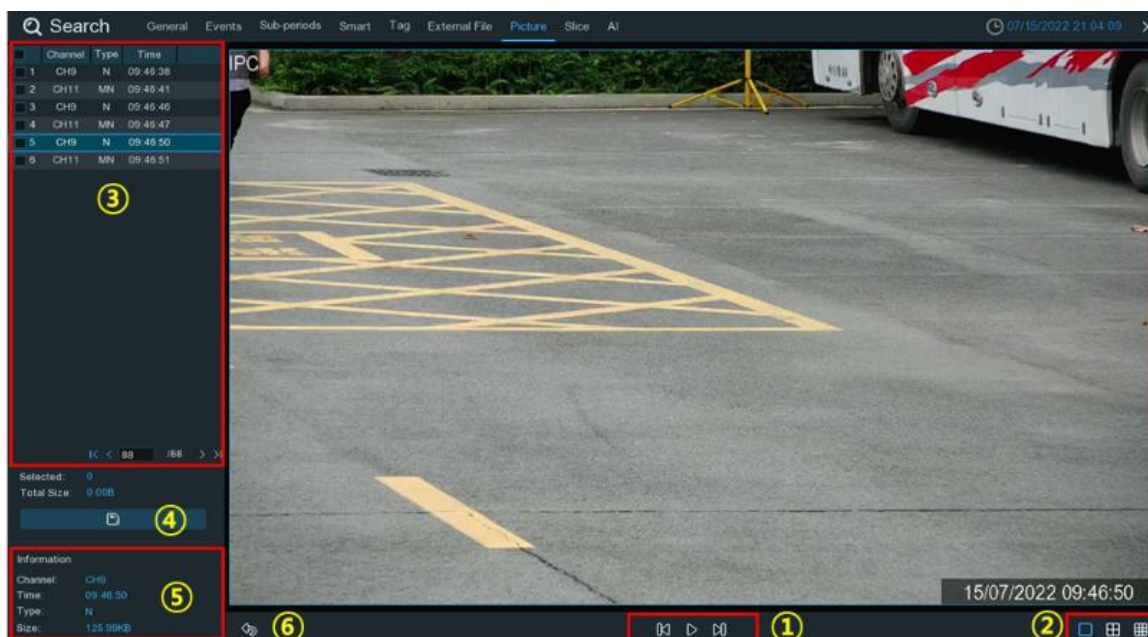

1. Play control buttons:

Button	Function
	Click to pause slideshow.
	When the slideshow is paused, you can click this button to view previous snapshot.
	Click to play slideshow.
	When the slideshow is paused, you can click this button to view next snapshot.

2. To select how many snapshots that you want to view at once in the screen.


3. Selected snapshots will be displayed here. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.

4. Select a snapshot, then click this button to copy it to a USB flash drive.


5. To display snapshot information. 6. Click this to go back to the previous screen.

7.8. Slice Search

This function is able to slice the recordings into each one minute, which helps to quickly search what you want to see.

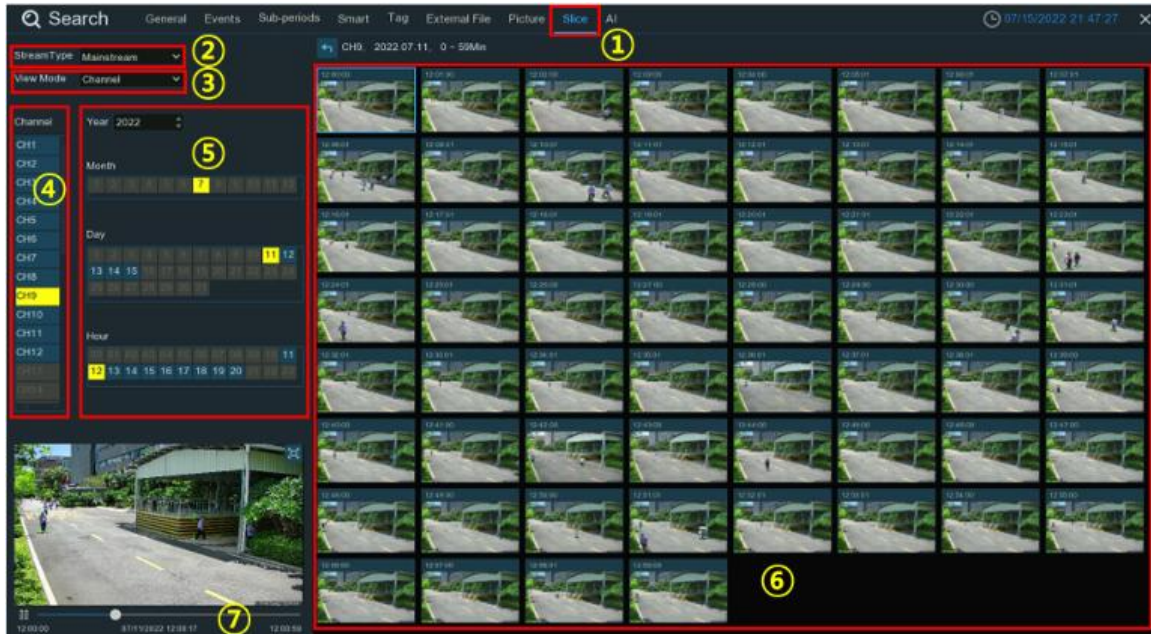

1. Click the **Slice** tab.
2. Select the video stream to search for. Mainstream is the default option. Substream can be selected if dual-stream recording is enabled.
3. Select the View Mode:
 - **Channel:** Your search will focus primarily on what happen in different time period in the selected camera.
 - **Time:** Your search will focus primarily on what happened in different cameras in a certain time period.
4. To choose the channel you want to search for. Only one channel allowed to search at once.
5. To choose the time (by hour) you want to search for.
6. When the channel and hour has been selected, the available one-hour recordings will be sliced into 60 segments from the first minute to the last of the hour, and the thumbnail images of each minute will be displayed on the screen.
7. Click on any one of the thumbnail images, the video will be played on the left bottom corner. Click on the time bar to adjust the play position. Click button, you can view the playback on full screen and make a backup.

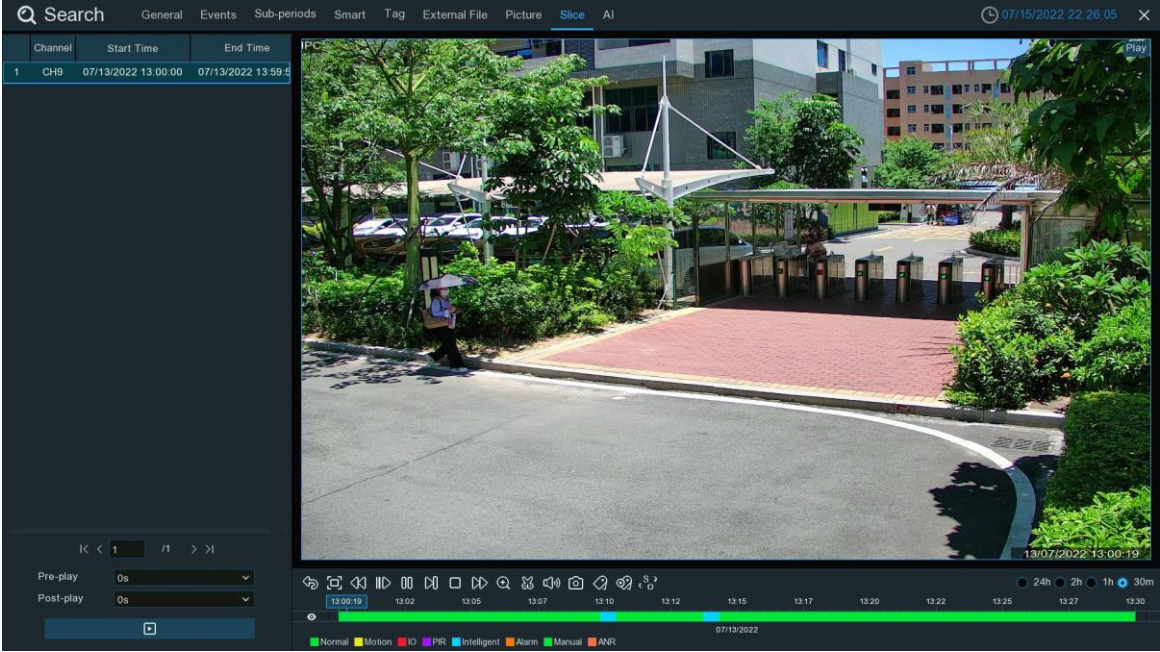


7.9. AI Search

In the AI search section, you'll be able to search events of face detection, license plates, human & vehicle detection, PID & LCD, repeat visitors and face attendance.


7.9.1. Face Detection Events

Click **Face** tab to enter the face search section, if you have enabled the face detection in camera(s), you will see the face images captured by all cameras on current day.

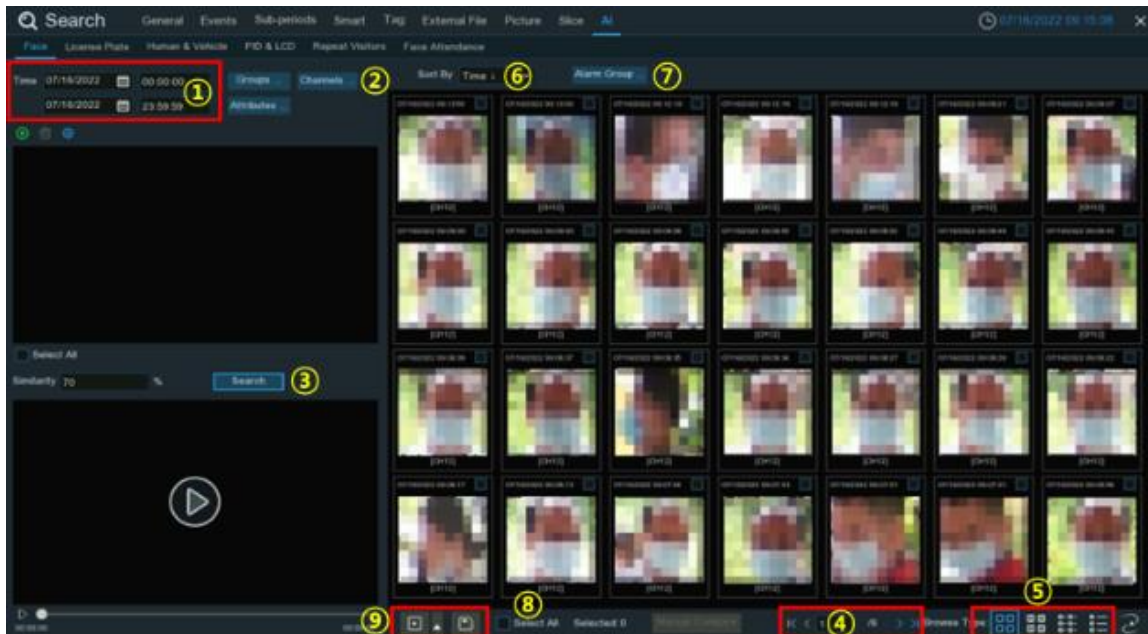

1. You can change the search time. Click the calendar icon to select a date to search on. A red underline on a date indicates face images were taken on those particular dates. For time, you can use the keypad to enter a specific start and end time.
2. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.
3. Click **Search** button to commence a search.
4. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
5. Click these buttons to change how the events are displayed. The default view is Thumbnail, but you can change it to List or Detail.
6. You can change to display the images in ascending or descending order by time.
7. You can narrow your search by selecting specific alarm group(s).
8. Tick the checkbox above each image to select it, or tick the checkbox of "**Select**" to select all images in current page.

9. Click backup button to copy all selected face images to your USB flash drive. If you want to save video files also, tick the checkbox of "**Record**", and then select the video format, adjust the length of time before and after the events.

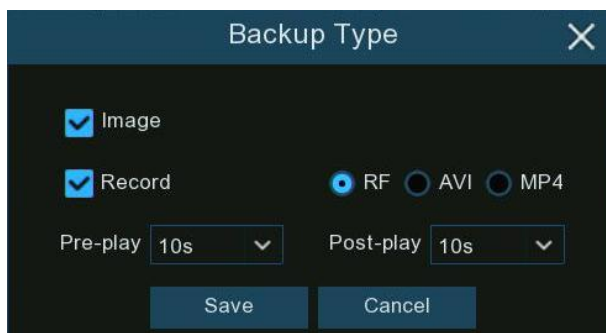

You can click play button to play the selected events, or click up to add time duration before and after the event and then play. See more on **7.9.1.1. Playing Events**.

7.9.1.1. Playing Events



1. Event List. Use the arrow buttons to turn page or use the keypad to navigate to a specific page. Double-click on an event to play it directly.

2. You can add time duration before and after the event and then click button to play.

3. **Video Playback Controls:** to control the video playback



Button	Function
	Return to event search page
	Enlarge the video playback to full screen
	Rewind button, subsequent presses of the button will change the rewind speed.
	Slow Play, subsequent presses of the button will change the play speed
	Play in normal speed
	Pause
	Play frame by frame. Click once to play a frame of the video
	Stop playing
	Fast forward button, subsequent presses of the button will change the speed.
	Select a camera, click this button then use the scroll button on the mouse to zoom. Use the picture-in-picture screen to select a different area to view. Right-click to exit.
	This button allows you to edit the video by setting mark in and mark out points which you can then copy to a USB flash drive. View more on 7.1.1. Video Segment Backup .
	Click to adjust audio output volume
	Click to take a snapshot and save to your USB flash drive


Button	Function
	Tagging allows you to record information such as a person or object within the video. Click on a camera to select, pause the video when you see a person or object to be tagged, then press this button (multiple tags can be created).
	Same as above, but you can name the tag.
	Click to switch the image scale for all playing cameras between original and stretch.

4. **Timeline:** Quick locate the playback position by clicking on the time line. You can zoom in or zoom out the timeline by using the timeframe options for precise location.



7.9.1.2. Search & Compare Face Images (Recognition)

You can appoint one or more face profiles selected from face recognition data base and then search, the system will compare and display the face images that match your search criteria.

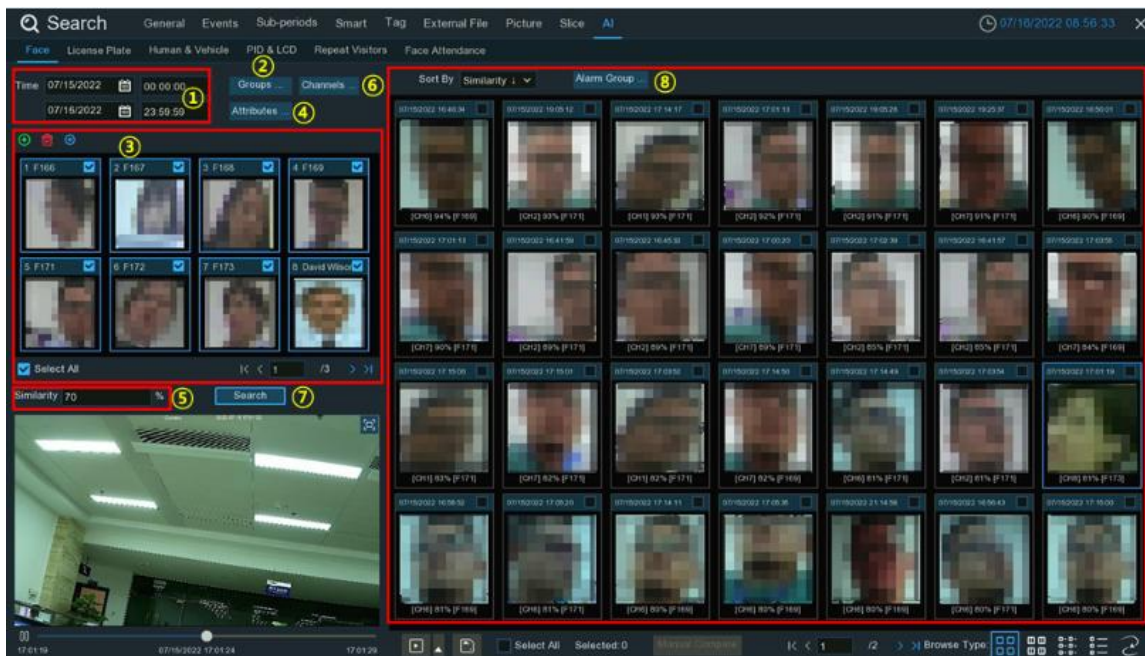


1. Click the calendar icon to select a date to search on. A red underline on a date indicates snapshots were taken on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time.

2. Click Groups button, and then select the groups where your targeted face profiles are saved in.

3. All face profiles exist in your selected group(s) will be displayed in the display window:

All face profiles are selected by default. You can untick the checkbox of "Select All" to deselect all.

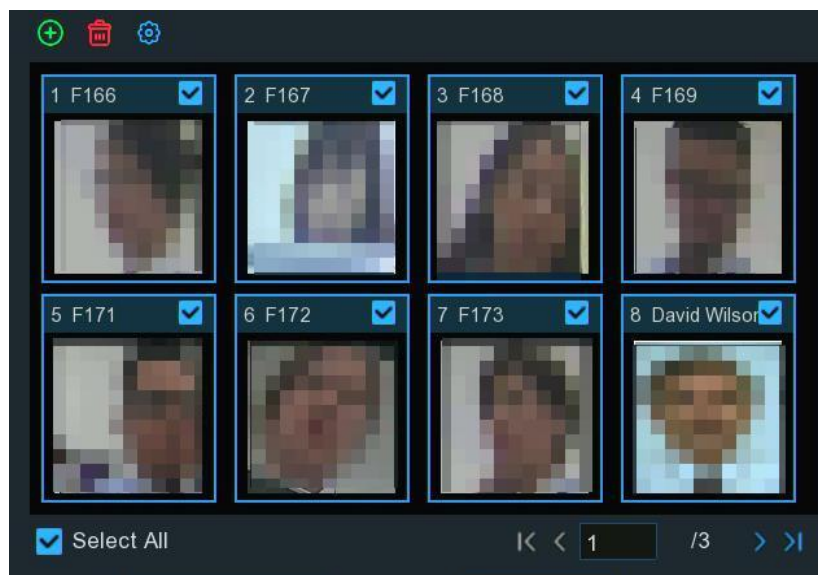

Tick or untick the checkbox above each image to select or deselect it.

If you want to delete a face profile, click on the image, and then click the button.

If you want to add more targeted face images, click add button , and then select face images from internal or external storage device.

4. If you have enabled the Face Attributes detection (**5.4.1.1. FD**), you can click here to appoint the attribute(s) you want to search.

5. Set the Similarity: Set how closely, in percentage terms, the detected face must match a targeted face to be considered a recognized match. The default threshold is 70%. A higher similarity % will result in fewer false recognition results.


6. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.

7. Click **Search** button to commence a search.


8. The face images that match your search criteria will be displayed. You can narrow your search by selecting specific alarm group(s).

7.9.1.3. Tracking Face

You can load a map and replace your cameras on the map. With the tracking function, you can easily to see someone's appearance/ disappearance time & position in your appointed cameras, and his/her movement track during the selected time period.

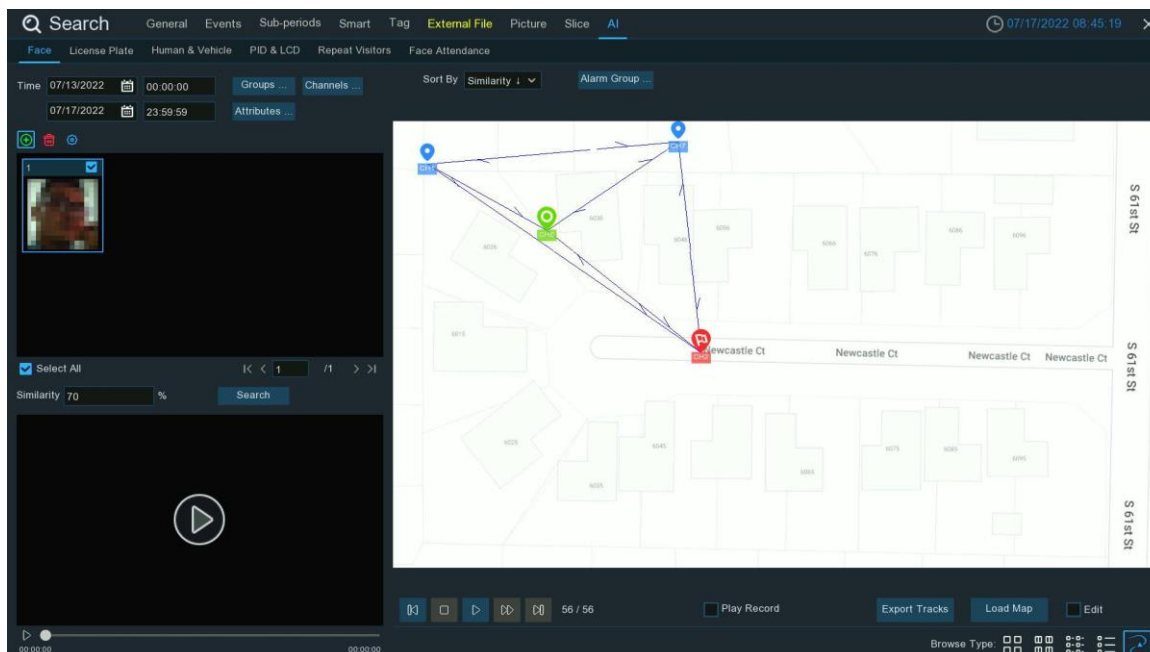


1. On the Face search page, click the tracking button to enter the operation page.

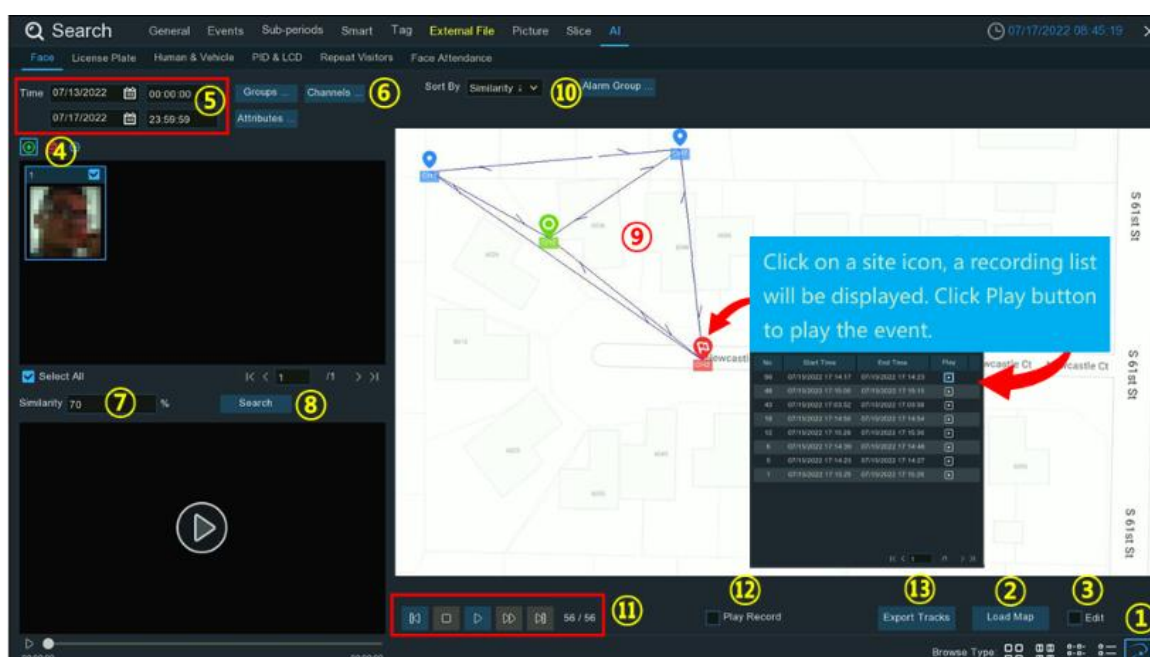

2. Click **"Load Map"** button to load a map image from your USB flash drive.

3. Tick the checkbox of **"Edit"**, you will see site icons which are equal with the number of your NVR channels. You can move the cameras to the positions where you want them to be placed on the map.

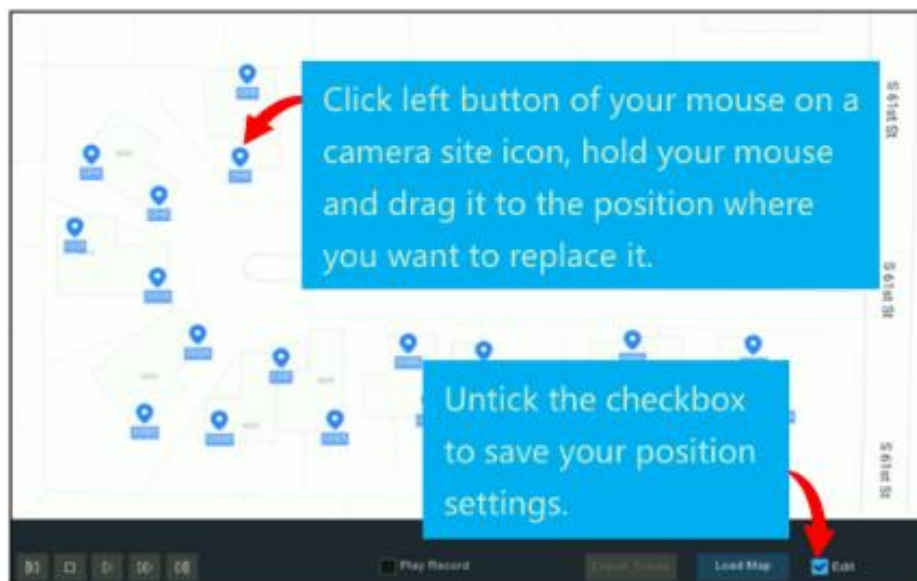

4. Click add button, and then select a face image from internal or external storage device.

Please note: the system supports to track only one face each time.

5. Click the calendar icon to select a date to search on. A red underline on a date indicates snapshots were taken on those particular dates. For time, you can search over 24 hours or you can use the keypad to enter a specific start and end time.

6. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.

7. Set the Similarity: Set how closely, in percentage terms, the detected face must match a targeted face to be considered a recognized match. The default threshold is 70%. A higher similarity % will result in fewer false recognition results.

8. Click **Search** button to commence a search.

9. After a while, several camera site icons are displayed on the map with different colors and illustrations. It displays when and where the person appeared at the first time, and when and where the person was last detected by a camera.



10. Click to choose "**Time** ↑" to sort the events from oldest to newest.


11. Click button to start playing an animation demonstration of the person's movement track. You can control the playing with below buttons:

Button	Function
	Click to display previous movement
	Stop
	Play
	Pause
	Click to adjust the play speed
	Click to display next movement


12. If you tick the checkbox of "**Play Record**", the animation of movement track will be played together with the event recording.

13. Export the tracking data for the selected time period to a USB flash drive. The file will be saved as an excel file. You can open the file in Excel (or similar software) to further analyze the data.

7.9.2. Search License Plate

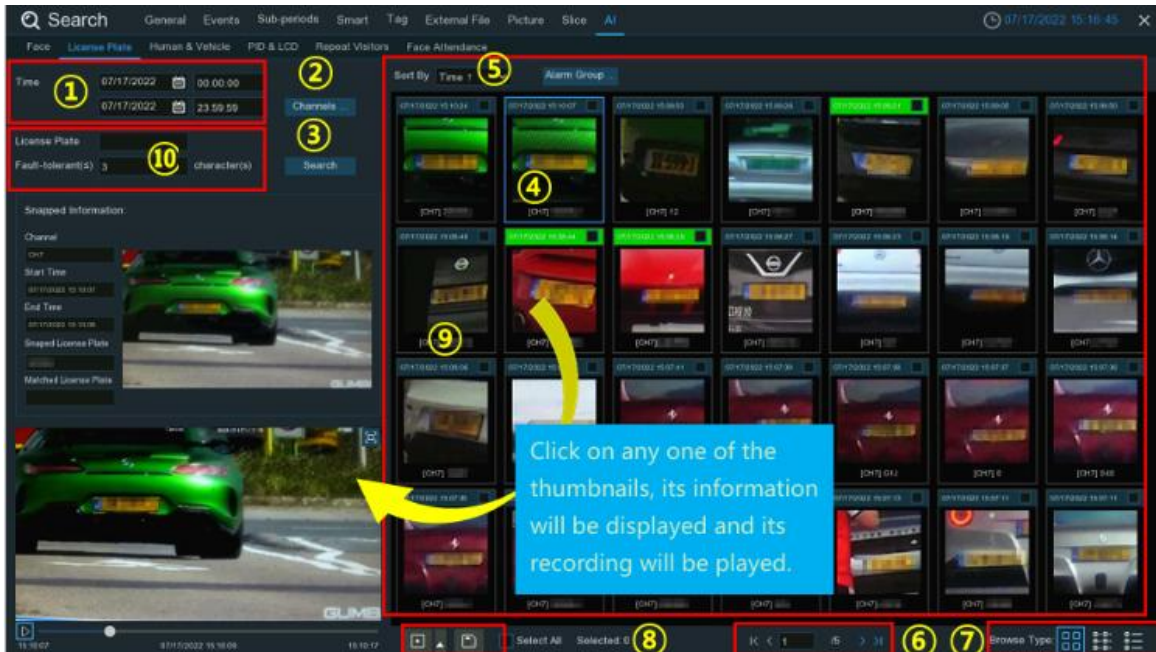

1. Click the calendar icon to select a date to search on. A red underline on a date indicates license plates were taken on those particular dates. For time, you can use the keypad to enter a specific start and end time.
2. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.
3. Click **Search** button to commence a search.
4. The search result will be displayed on the right side of the screen.
5. You can change to display the images in ascending or descending order by time.
6. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
7. Click these buttons to change how the events are displayed. The default view is Thumbnail, but you can change it to List or Detail.
8. Tick the checkbox above each event to select it, or tick the checkbox of "**Select**" to select all events in current page.
9. Click backup button to copy all selected face images to your USB flash drive. If you want to save video files also, tick the checkbox of "**Record**", and then select the video format, adjust the length of time before and after the events.

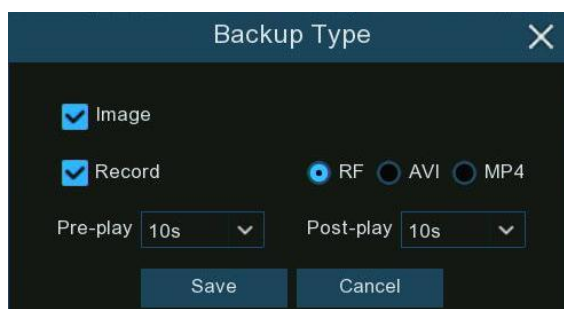

The dialog box titled "Backup Type" contains the following settings:

- ☒ Image
- ☒ Record
 - ☒ RF
 - ☐ AVI
 - ☐ MP4
- Pre-play: 10s (dropdown)
- Post-play: 10s (dropdown)
- Buttons: Save, Cancel

You can click play button to play the selected events, or click to add time duration before and after the event and then play. See more on **7.9.1.1. Playing Events**.

10. You can input the license number and set the number of **Fault Tolerance** to narrow your search.


Fault Tolerance: Varies in image resolution, light strength, camera angles, moving speed of the vehicle and etc., character(s) in the license plate number might be failed to recognize. Set the Fault Tolerance that how many characters the detected license allowed to be different from the license number saved in the group. If the number of difference characters between the detected license number and a license profile in the group is no more than the set value, the detected license will be considered a recognized match.

Recognized License Number	Input Number	Fault Tolerance	Recognition Result
AB123C	AB-123-C	≤2 characters	True
AB123C	AB-123-C	≤0 or 1 character	False
A8I23C	AB123C	≤2 characters	True
A8I23C	AB123C	≤0 or 1 character	False
B594SB	B734KB	≤3 characters	True
B594SB	B734KB	≤2 character	False
AB132C	AB123C	≤2 characters	True
AB123C	AB123C	≤1 or 1 character	True


Samples for true of false result

7.9.3. Human & Vehicle

Click **Human & Vehicle** tab to enter the human & vehicle search section, if you have enabled the human & vehicle detection in camera(s), you will see the human & vehicle detection events captured on current day.

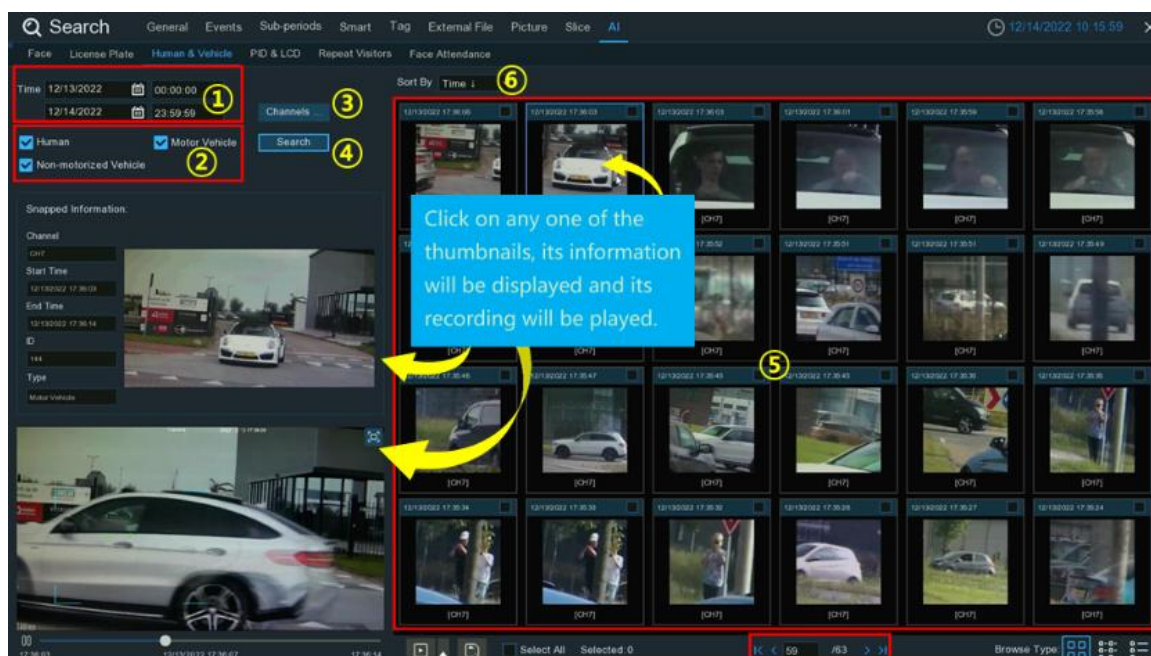

1. Click the calendar icon to select a date to search on. A red underline on a date indicates human and/or vehicles were taken on those particular dates. For time, you can use the keypad to enter a specific start and end time.
2. Select the target type(s) you want to search for.
3. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.
4. Click **Search** button to commence a search.
5. The search result will be displayed on the right side of the screen.
6. You can change to display the images in ascending or descending order by time.
7. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
8. Click these buttons to change how the events are displayed. The default view is Thumbnail, but you can change it to List or Detail.
9. Tick the checkbox above each event to select it, or tick the checkbox of "**Select**" to select all events in current page.
10. Click backup button to copy all selected face images to your USB flash drive. If you want to save video files also, tick the checkbox of "**Record**", and then select the video format, adjust the length of time before and after the events.

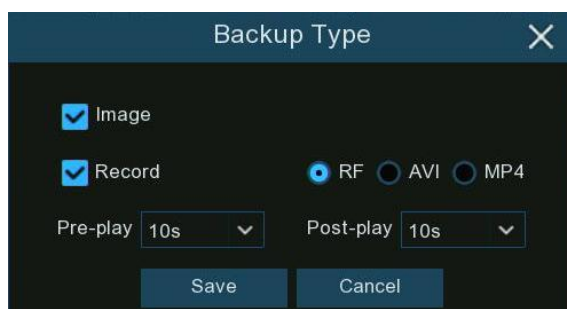


A dialog box titled "Backup Type" with a close button (X) in the top right corner. It contains the following settings:

- ☒ Image
- ☒ Record
- Format selection: ☒ RF, ☐ AVI, ☐ MP4
- Pre-play: 10s (dropdown menu)
- Post-play: 10s (dropdown menu)
- Buttons: Save, Cancel

You can click play button to play the selected events, or click up to add time duration before and after the event and then play. See more on **7.9.1.1. Playing Events**.


7.9.4. PID & LCD

Click **PID & LCD** tab to enter the PID (Perimeter Intrusion Detection) & LCD (Line Crossing Detection) event search section, if you have enabled the PID and/or LCD in camera(s), you will see the detection events captured on current day.

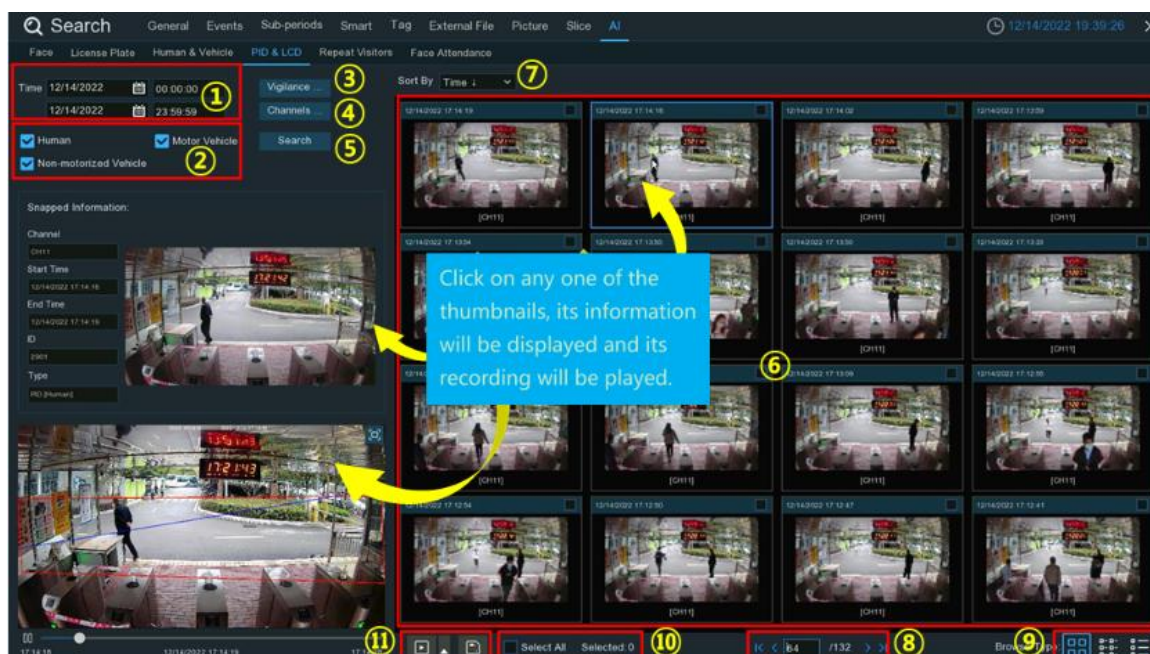

1. Click the calendar icon to select a date to search on. A red underline on a date indicates human and/or vehicles were taken on those particular dates. For time, you can use the keypad to enter a specific start and end time.
2. Select the target type(s) you want to search for.
3. Select PID and/or LCD in Vigilance.
4. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.
5. Click **Search** button to commence a search.
6. The search result will be displayed on the right side of the screen.
7. You can change to display the images in ascending or descending order by time.
8. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
9. Click these buttons to change how the events are displayed. The default view is Thumbnail, but you can change it to List or Detail.
10. Tick the checkbox above each event to select it, or tick the checkbox of "**Select**" to select all events in current page.

11. Click backup button to copy all selected face images to your USB flash drive. If you want to save video files also, tick the checkbox of "**Record**", and then select the video format, adjust the length of time before and after the events.

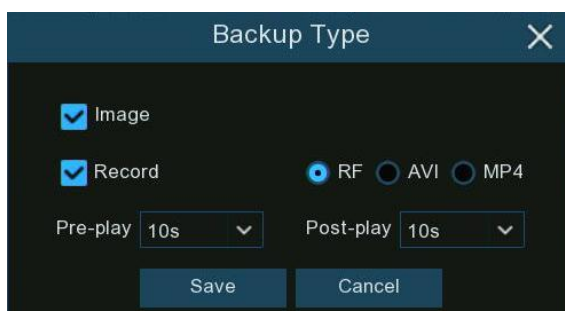


The image shows a 'Backup Type' dialog box with a dark background and light text. It has a title bar with a close button (X). Inside, there are two checked checkboxes: 'Image' and 'Record'. Below 'Record', there are three radio buttons for video format: 'RF' (selected), 'AVI', and 'MP4'. Below these are two dropdown menus for 'Pre-play' and 'Post-play', both set to '10s'. At the bottom are 'Save' and 'Cancel' buttons.


You can click play button to play the selected events, or click up to add time duration before and after the event and then play. See more on **7.9.1.1. Playing Events**.

7.9.5. Repeat Visitors

This is a function to fast search the frequency of occurrence of persons in a certain time period.

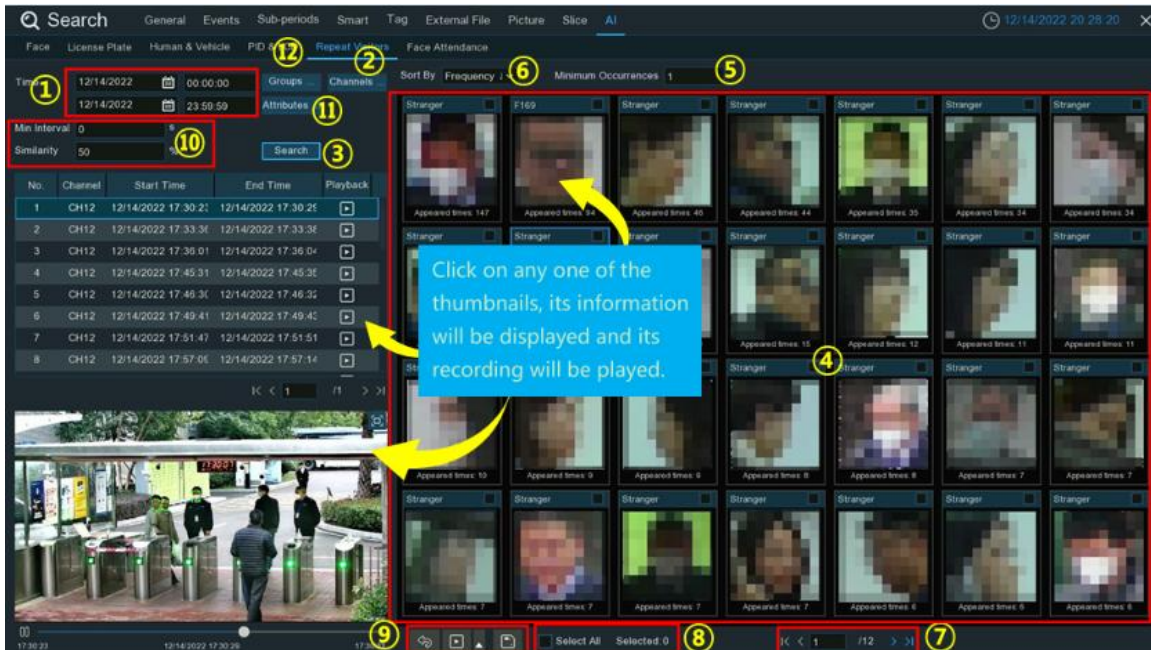


1. Click the calendar icon to select a date to search on. A red underline on a date indicates human and/or vehicles were taken on those particular dates. For time, you can use the keypad to enter a specific start and end time.
2. The system searches all channels by default. You can click the "**Channels**" button to select specific channel(s) that you want to search for.
3. Click **Search** button to commence a search.
4. The search result will be displayed on the right side of the screen. "**Appeared Times**" under each thumbnail image indicates how many times the person was captured during your search period.
5. You can input a number of "**Minimum Occurrences**" to hide the search result whose appeared time is less than the number of minimum occurrences.
6. You can change to display the images in ascending or descending order by time or frequency.
7. Use the arrow buttons to turn page or use the keypad to navigate to a specific page.
8. Tick the checkbox above each event to select it, or tick the checkbox of "**Select**" to select all events in current page.
9. Click backup button to copy all selected face images to your USB flash drive. If you want to save video files also, tick the checkbox of "**Record**", and then select the video format, adjust the length of time before and after the events.

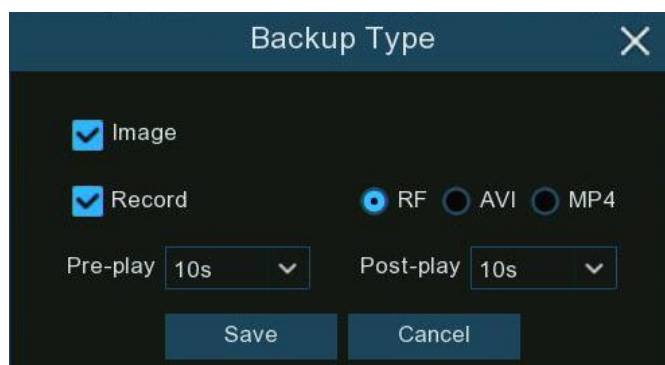

You can click play button to play the selected events, or click up to add time duration before and after the event and then play. See more on **7.9.1.1. Playing Events**.

10. You can narrow your search by adjusting the "**Min. Interval**" time and the percentage of "**Similarity**". **Min. Interval** is used to reduce the quantity of searched face images that repeatedly captured within a short period time. For example, if the Min. Interval is set to 20 seconds, then starting from the time of the first face image searched on the selected date, all the similar face images that appear within 20 seconds will only display the first image. The system will display the first image captured in every 20 seconds. **Similarity** is used to set how closely, in percentage terms, the searched faces must match each other to be considered a recognized same person. A higher percentage of similarity will result in fewer false recognition results.

11. Furthermore, you can select the face features to execute refined search. Click "**Attributes**" button, and then select the features you want to search for, and then click **Search** button again.

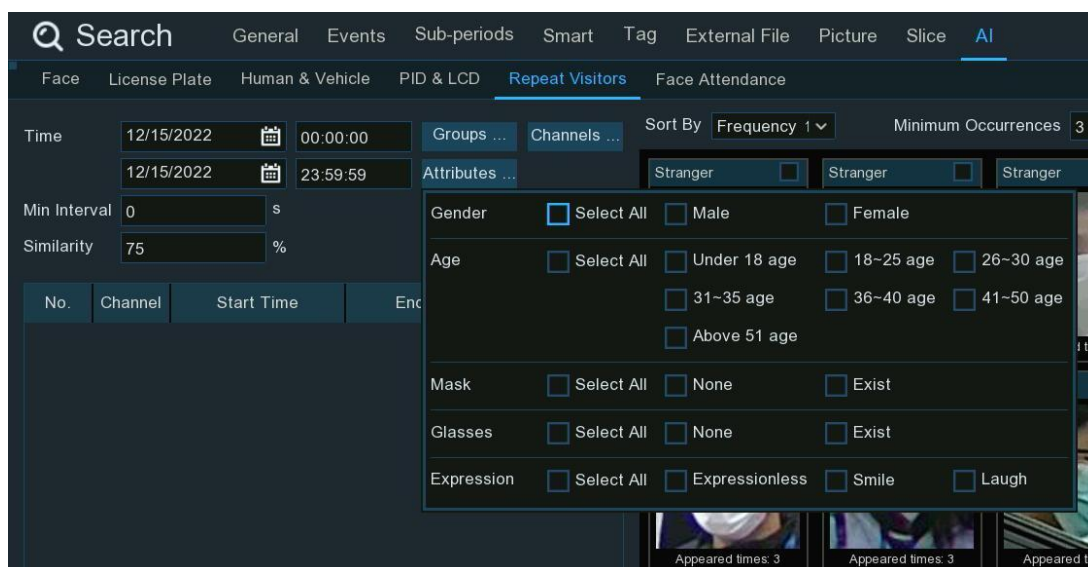


12. By default, the system will search and display all captured face images during your searching time period. If you want to search for the persons whose face profiles had been stored in the groups, click the Group button and choose the face group(s) accordingly.

7.9.6. Face Attendance

Face Attendance is used to assist in attendance checking by faces. It will help to analyze the absenteeism, coming late and leaving early.

Note: In case of failure, do NOT take the face attendance function as your only measure to check attendance.

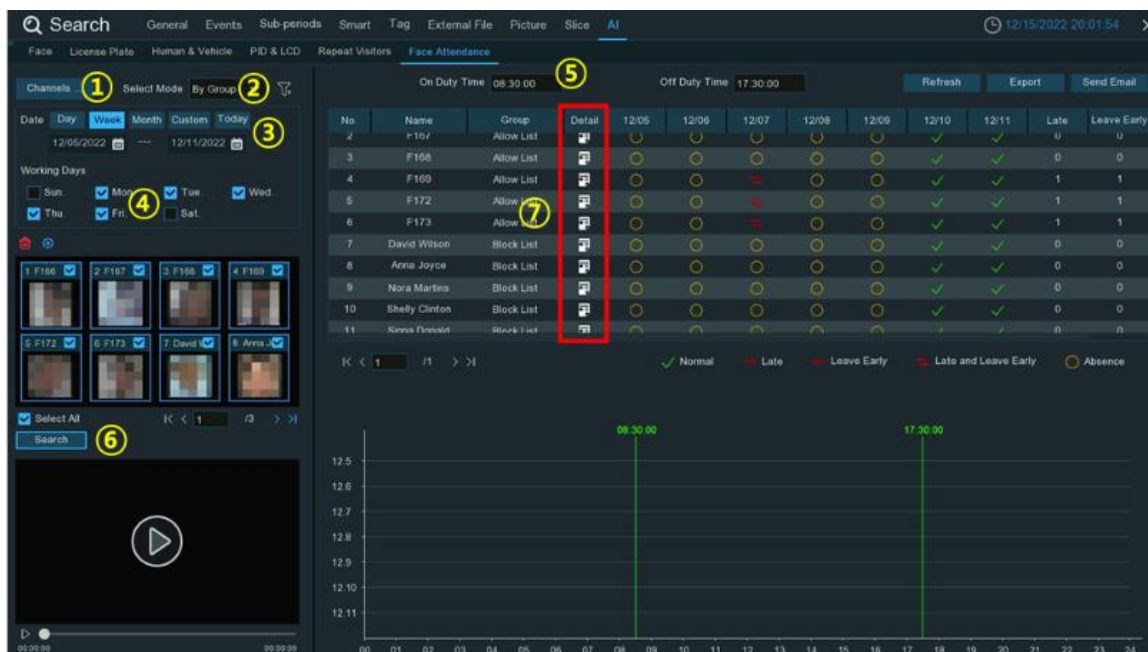

1. Select the channel(s).
2. Select search by Group or by Person. If you choose **By Group**, all the persons in the selected group(s) will be searched. If you choose **By Person**, only your selected person(s) will be searched. Click the filter icon to choose group(s) or person(s). Your selected person(s) will be displayed on the left middle side of the window.
3. Select the search date by an individual day, week, month, current day or customized date.
4. Set the Working Days.
5. Set the On Duty Time and Off Duty Time.
6. Click **Search** button, the result will be displayed on the right side of the window.
7. You can export the data to your USB flash drive or send by email.
8. Click on the detail icon , you will see the captured images and videos of the first occurrence and the last occurrence of the person in the day. Click on the play button to have a quick playback.



Chapter 8 Remote Access

Through the Web Client You can use the web client on a PC to access the device remotely at any time. Before using the web client, you need to ensure that the device network is normal.

8.1 Basic System Environment Requirements


The minimum requirements for the hardware and operating system for running the web client are as follows.

Item	Minimum Value Recommended Value
CPU	Intel® Core™i5 CPU Intel® Core™i5 CPU or higher
RAM	≥4 GB ≥8 GB
Hard disk drive	≥500 GB ≥1000 GB
Video memory	≥2 GB ≥4 GB
Display resolution	1280*1024 1920*1080
OS	Windows 7 or above Mac OS X®10.9 or above
DirectX	DirectX 11
Direct3D	Acceleration Function
Ethernet adapter	10/100/1000 M Ethernet adapter
Internet Explorer (IE) web browser	Microsoft Internet Explorer (version: V11, V10)
Firefox web browser	V52 or above

Google Chrome V57 or above web browser Apple Safari web V12.1 or above browser Edge web browser V79 or above (using the Chromium core)


8.2 Web Plug-in Downloading and Installation

To access the Web client, perform the following steps: 1. Open the web browser, enter the IP address or "DDNS + port number" of the device in the URL bar to open the user information verification page. Then, enter the correct user name and password to log in to the web client. (If you enter an incorrect password for consecutive five times, your account will be locked for 180 s.)

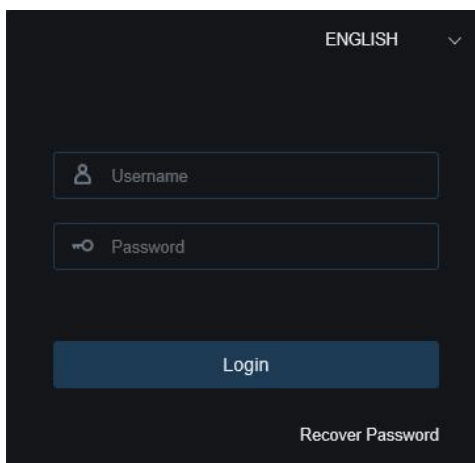


The login page features a dark background. At the top right, there is a language selector set to 'ENGLISH'. Below this, there are two input fields: 'Username' with a person icon and 'Password' with a key icon. A large 'Login' button is positioned below the password field. At the bottom right, there is a link for 'Recover Password'.

2. When you access the web client through the IE for the first time, the system requires you to install a plug-in. Click **Download and install the player** to download the plug-in and install it on the computer.

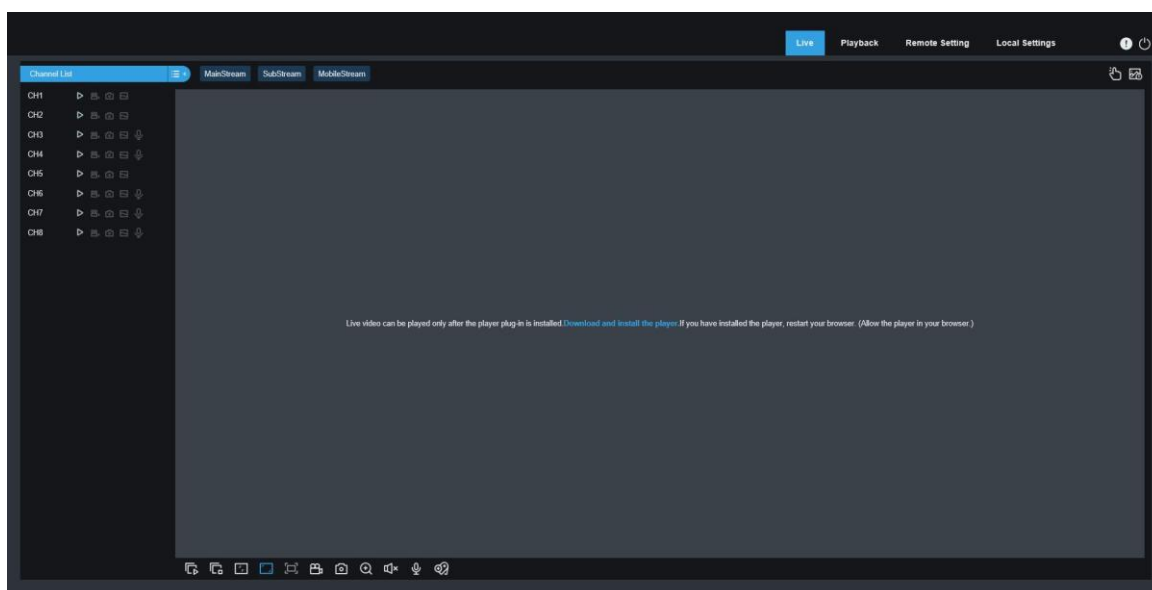

3. After installing the plug-in, refresh the page, and click **Allow** in the pop-up dialog box at the bottom of the page. Then, images can be displayed properly.

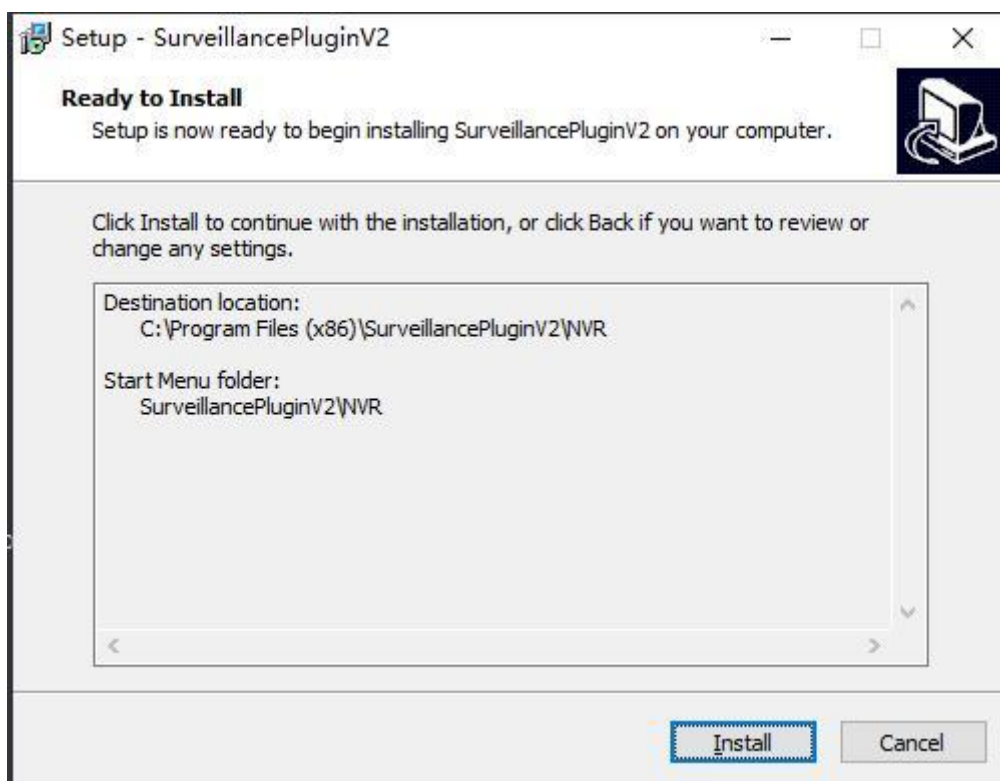


Note: If you use the Apple Safari, Google Chrome, Firefox, or Microsoft Edge web browser, you do not need to download the plug-in and can directly log in to the device.

8.3 Web Client Management

8.3.1 Live View Page

After user information is verified on the web client, the live view page of the device is displayed, on which you can enable or disable the live view, manually record video to the local computer, and perform screen snapshot, PTZ control, and color adjustment.

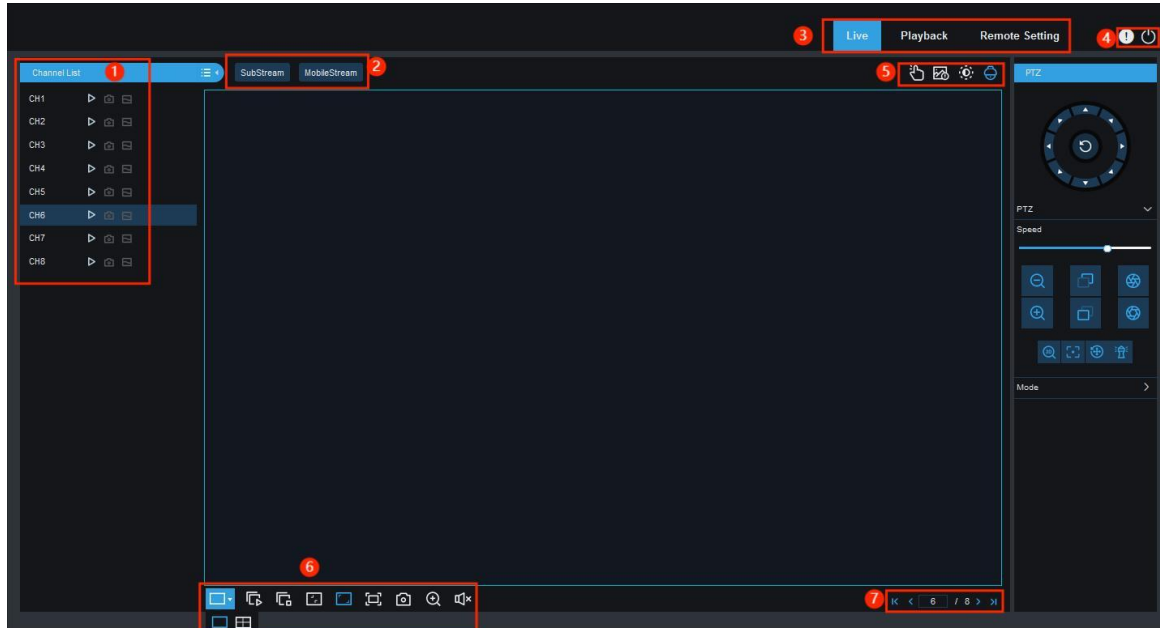

1. Channel list

: Click this icon to display the channel list.

: Click this icon to enable or disable live video streaming. When live video streaming is enabled, the icon is displayed in blue.

: Click this icon to start recording streaming video manually. Click this icon again to stop recording. The manually recorded video is stored on the computer. During recording, the icon is blue.

: Manual snapshot icon. Click this icon to store the real time snapshot currently displayed on the computer.

: Bit rate icon. For cameras, main stream, substream, or mobile stream video settings can be used. The mobile stream setting is applicable to IP channels only.

2. Stream switching

The web client is automatically switched to main stream mode when videos are viewed in a single split-screen and substream mode when videos are viewed in multiple split-screens. You can select

the appropriate stream mode for video viewing in accordance with the actual network environment.

3. Main menu

Live: Get video streams of the device in real time.


Playback: Remotely play the videos stored on the device.

Remote Setting: Remotely set parameters of the device.


4. ⓘ Hover the mouse to display system user and web version information.

⏻ Exit the web client.

5. Manual Alarm Manually enable or disable I/O alarms.

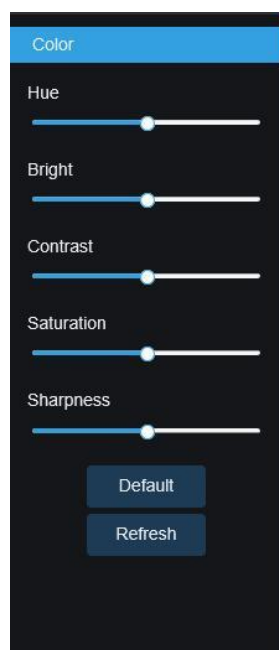

Color: Show or hide the color controls.

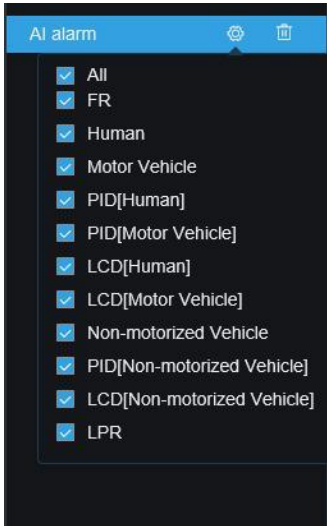

AI alarm: Push AI alarm events. Click settings to select the types of the AI alarm events to be pushed. Click to clear the current push list.



PTZ: Enable or disable the PTZ operation menu.

Arrow keys: Click the arrow keys to rotate the PTZ camera.

Default cruise.

PTZ speed: Set the rotation speed of the PTZ camera.

Zoom: Click -/+ to zoom in or out the image.

Iris: Adjust the iris size.


Focus: Click -/+to adjust the focus.

3D PTZ. Automatic focusing. Preset point resetting. Watch mode. Manual tracking mode.

For PTZ rotation mode. There are six modes: PTZ, PRESET, Line Scan, Watch Mode, Tour, and Pattern Scan. For detailed information, see 5.1.4.1 High-speed PTZ Camera Control.

Cruise: Start/stop PTZ cruise.

Preset points: Modify the names of preset points, and go to, add, or delete preset points.

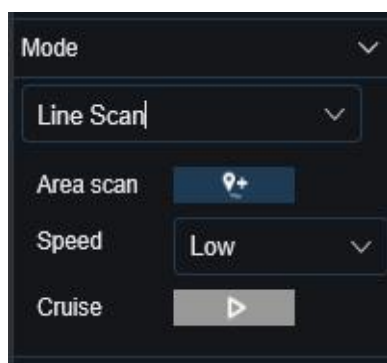


Line Scan page:

Area scan: Click to record the start position and rotate the PTZ camera, and click to record the stop position.

Speed: Select the linear cruise speed.


Click to start linear cruise. In this mode, the PTZ camera moves on the same horizontal plane only.

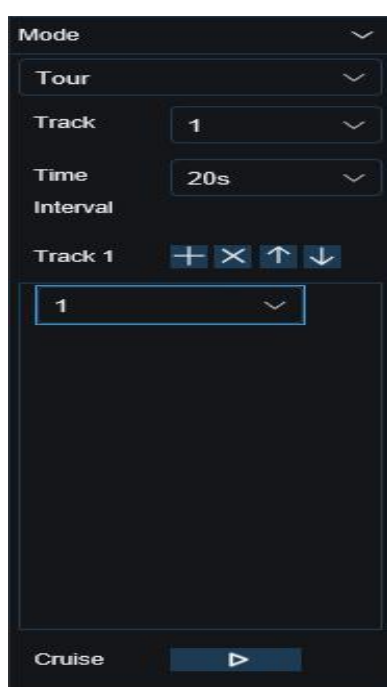

Tour page:

Time Interval: Dwell time at each preset point.

Click to add a preset point. Click to delete the preset point. Click to move up/down / the preset point. Click to start cruise.

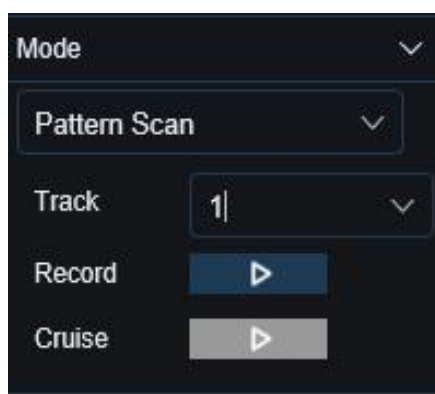

Pattern Scan page:

Record: Click to start recording the cruise route. Click to stop recording.

Cruise: Click to start cruise in accordance with the recorded route and action.

6. Live View Control Buttons




Button	Function
	Switch display mode in the channel area.
	Open all channel previews.
	Close all channel previews.
	Original proportions: The live video is displayed in the original proportions.
	Stretch: The live video is stretched to fit the entire area of each channel on the screen.
	The web client is enlarged to full screen.
	Manual recording: Click this icon to start manual recording of all displayed channels. Click this icon again to stop recording. The manually recorded video is stored on the computer.
	Manual capture: Click this icon to capture the images of all displayed channels and store them on the computer.
	Digital zoom: Click an active image, and drag and drop the mouse to get an area on the active image to zoom it in. Right-click the area to return to normal view.
	Volume control: Adjust the volume by adjusting the level value.
	Silence mode.
	Intercom: Click this icon to enable the intercom between the client and the device. Click this icon again to disable the intercom with the device. (Note: This function needs to be supported by the device.)

Button	Function
	White light control. White light deterrence can be enabled manually (camera support is required).
	Alarm bell control. Alarm bell can be enabled manually (camera support is required).
	Warning light control. Warning light alarm can be enabled manually (camera support is required).
	Click this icon to add a custom tag event.

8.3.2 Playback Page


On this page, you can search and play back the videos stored on the hard disks of the device, and can download videos to a PC.

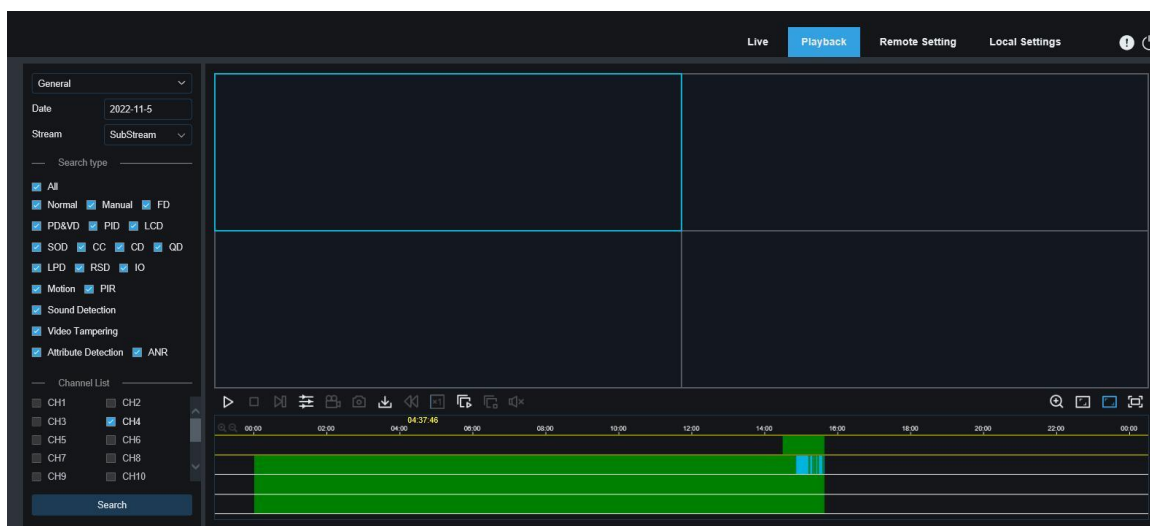

Searching Videos:

1. Click **Playback** in the top right corner to open the **Playback** page.
2. Select the date for video query on the calendar. The days with video recording are underlined in red.
3. In the **Search type** area, select the recording types to be queried. You can also select **All** to query all recording types.
4. Select the video streams to be searched and played.
5. In the **Channel List** area, select the channels of which videos are to be played back. (You can search at most four channels for video playback at the same time.)
6. Click the **Search** button to search videos.
7. The searched videos are displayed on the timeline. Click the video clip to be played, and click to play the video.

8.3.2.1 Playback Control Icons

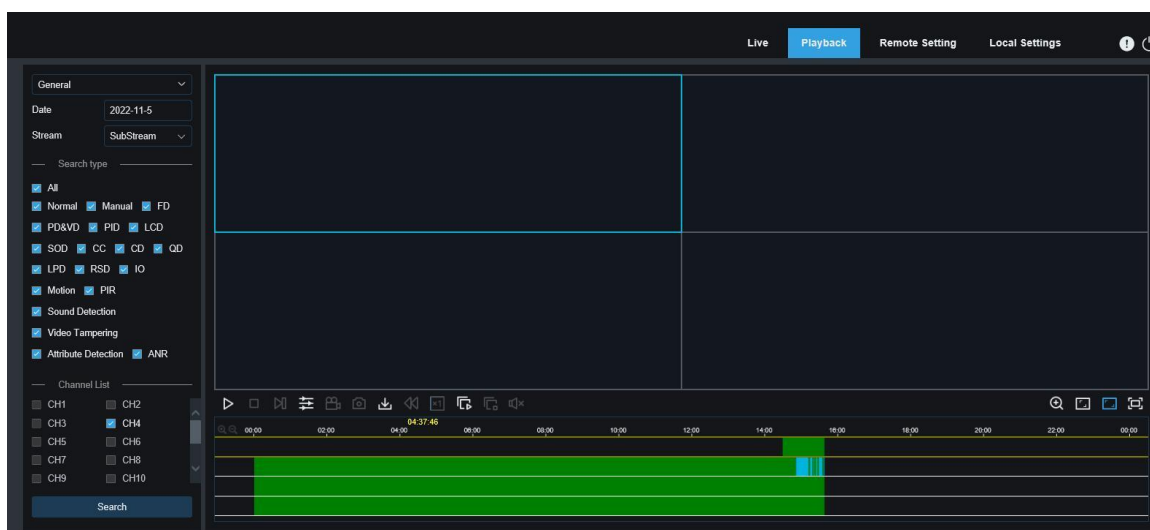

Button	Function
	Play a single video.
	Pause a single video.
	Stop playing the video of a single channel.
	Play videos frame by frame: Move forward by one frame, that is, move the frames one by one through playback. It is available only when the synchronous playback option is not selected.
	Synchronous playback: Click this icon to synchronously play the videos of the selected channels in the same time period.
	Click this icon to select a channel being played, and then click the record icon to record the current video to the computer. Click this icon again to stop recording.
	Select a channel being played, and click this icon to take a snapshot and store it on the computer.
	Click this icon to open the download page, on which you can select the videos of the selected time ranges of selected channels.

	☐	Start Time	End Time	Status	File Size
1	☐	2021-02-20 00:00:00	2021-02-20 00:06:01	Not Downloaded	180.91M
2	☐	2021-02-20 00:06:01	2021-02-20 00:14:28	Not Downloaded	253.81M
3	☐	2021-02-20 00:14:28	2021-02-20 00:22:58	Not Downloaded	253.99M
4	☐	2021-02-20 00:22:58	2021-02-20 00:31:24	Not Downloaded	253.73M
5	☐	2021-02-20 00:31:24	2021-02-20 00:39:49	Not Downloaded	253.62M
6	☐	2021-02-20 00:39:49	2021-02-20 00:48:19	Not Downloaded	253.86M
7	☐	2021-02-20 00:48:19	2021-02-20 00:56:49	Not Downloaded	253.90M
8	☐	2021-02-20 00:56:49	2021-02-20 01:05:18	Not Downloaded	253.83M
9	☐	2021-02-20 01:05:18	2021-02-20 01:13:44	Not Downloaded	253.55M
10	☐	2021-02-20 01:13:44	2021-02-20 01:22:10	Not Downloaded	253.46M
11	☐	2021-02-20 01:22:10	2021-02-20 01:30:36	Not Downloaded	253.67M
12	☐	2021-02-20 01:30:36	2021-02-20 01:39:06	Not Downloaded	253.98M
13	☐	2021-02-20 01:39:06	2021-02-20 01:47:35	Not Downloaded	253.62M
14	☐	2021-02-20 01:47:35	2021-02-20 01:56:01	Not Downloaded	253.58M

14 Row / Page
1 / 14Page

Start Download
Stop Download


Select the files to be downloaded, and click the **Start Download** button to start downloading. The download status is displayed. Click the **Stop Download** button to stop downloading.

Button	Function
	Rewind videos. It is available only when the synchronous playback option is not selected.
	Playback speed: Click this icon to select the playback speed.
	Play all channels: Click this icon to play all channels of the selected search types. It is available only when the synchronous playback option is not selected.
	Stop playing all channels: Click this icon to stop playing all channels. It is available only when the synchronous playback option is not selected.
	Digital zoom: Click a video being played, and drag and drop the mouse to get an area on the video to zoom it in. Right-click the area to return to normal view.
	Original proportions: The video is displayed in the original proportions.
	Stretch: The video being played is stretched to fit the entire area of each channel on the screen.

Button	Function
	The web client is enlarged to full screen.

8.3.2.2 Image Playback

After the capture function is enabled for the device, you can search the captured images on this page. A maximum of 5000 images can be searched at a time, and the time interval can be modified as needed.

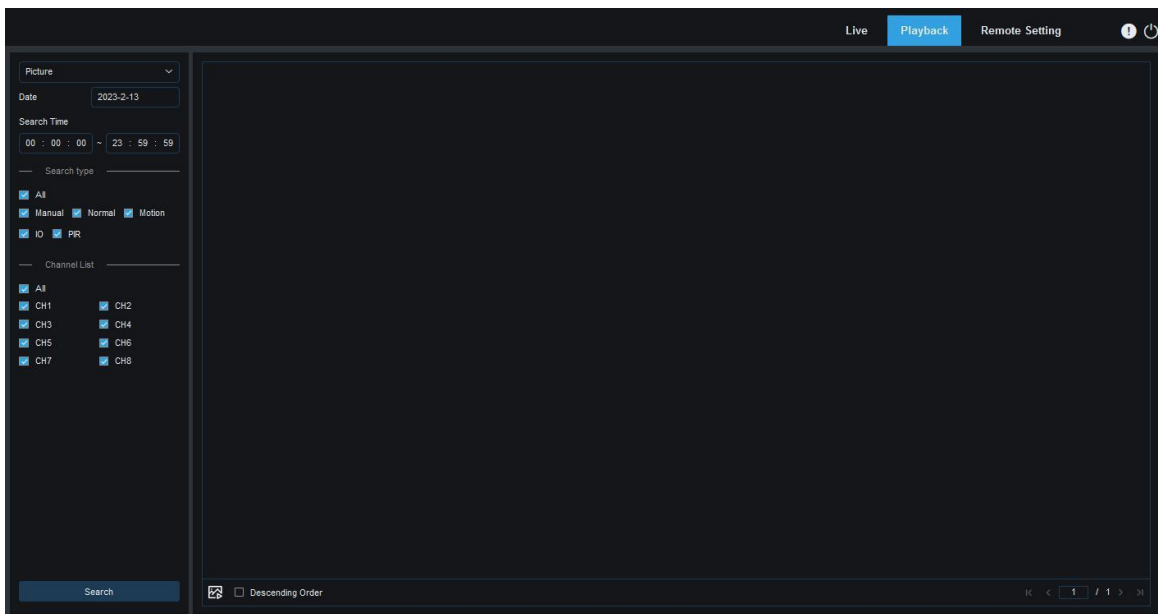


Searching images:

1. Click **Playback** in the top right corner of the page.
2. Select **Picture** from the drop-down list in the top left corner of the page.
3. Select the day to be searched on the calendar. The dates with snapshots are underlined in red.
4. Select the image types to be searched from the **Search Type** menu, or select **All** to search all image types.
5. Select the channels of which videos are to be searched.
6. Click **Search**.
7. The images meeting the search conditions are displayed in the right pane. If you double-click an image, the videos with the time periods before and after the image will be played back. Click to return to the previous page.


8.3.2.3 Smart Playback

After the motion detection function is enabled for the device, if there are motion detection alarms triggered, you can search the smart playback videos.

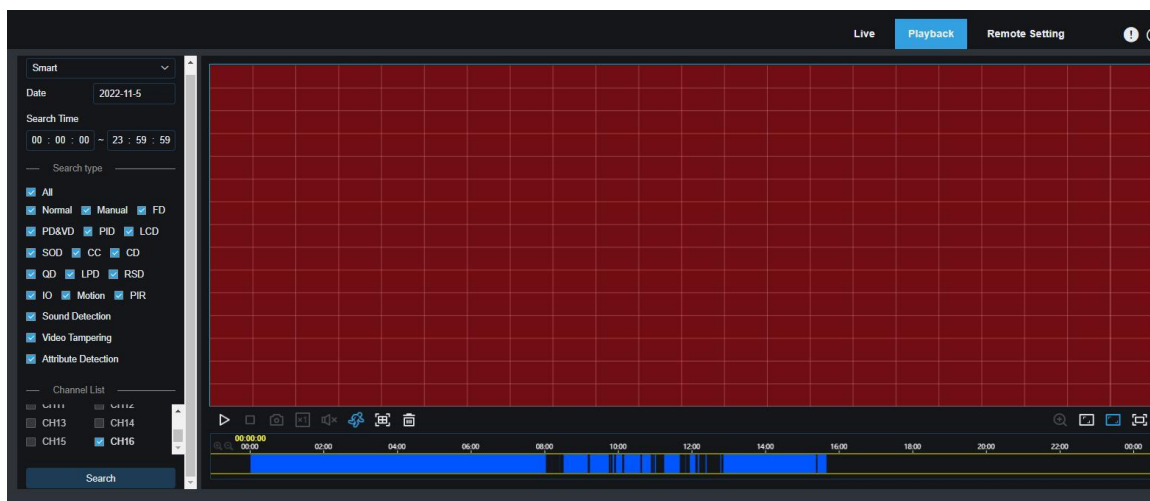

Click motion to display the smart setting area. Click extension to select all areas. Click to clear all selected areas.


8.3.2.4 Playback by Tag

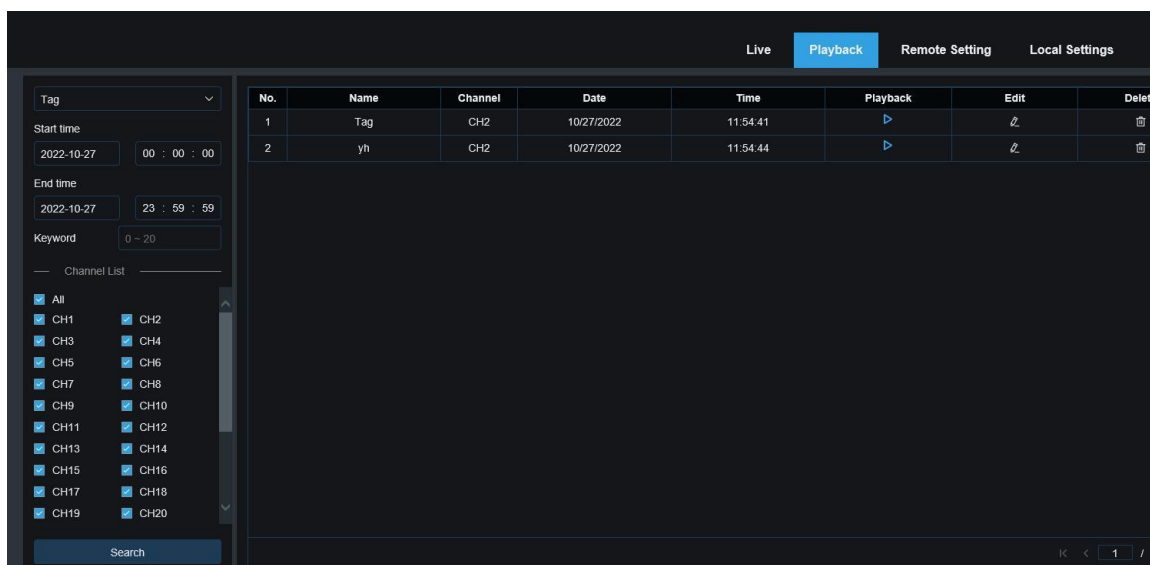

On this page you can search all added tags, and edit, play back, or delete them as needed. Select time and channels, and click to complete the search. Click play to jump to the position marked by the tag to play back the video.


8.3.2.5 AI Playback

After the AI alarm function is enabled for the device, you can search AI alarm events on this page, including face detection, license plate detection, pedestrian and vehicle detection, PID&LCD, repeat customers, and face attendance events.

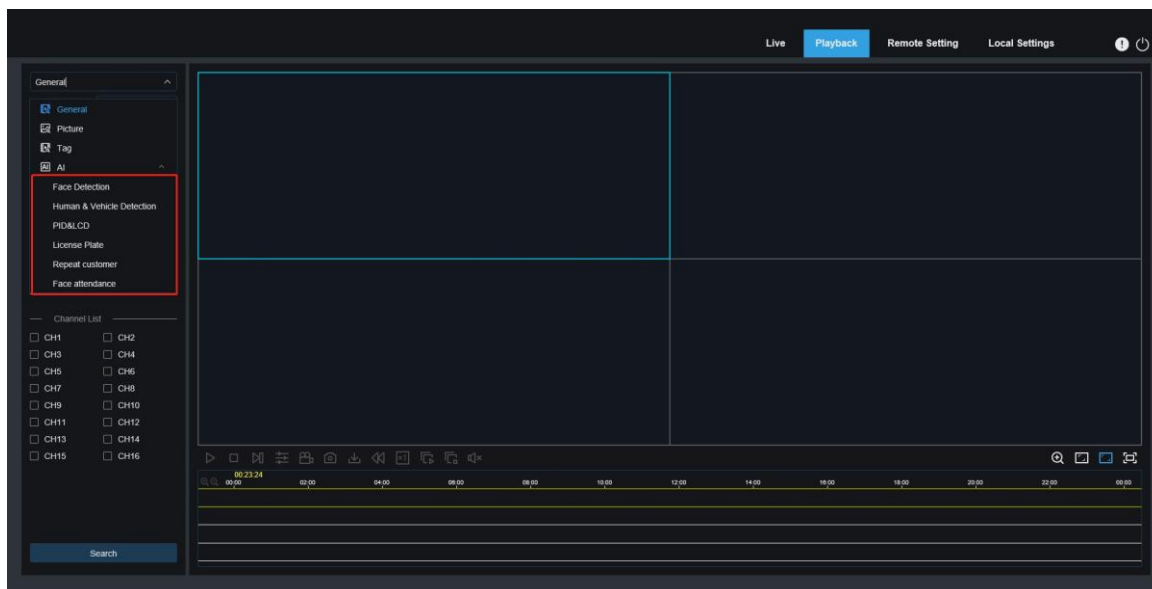

8.3.3 Remote Setting

On this page you can remotely set device parameters, including channel, video, alarm, AI, network, device, and system parameters.

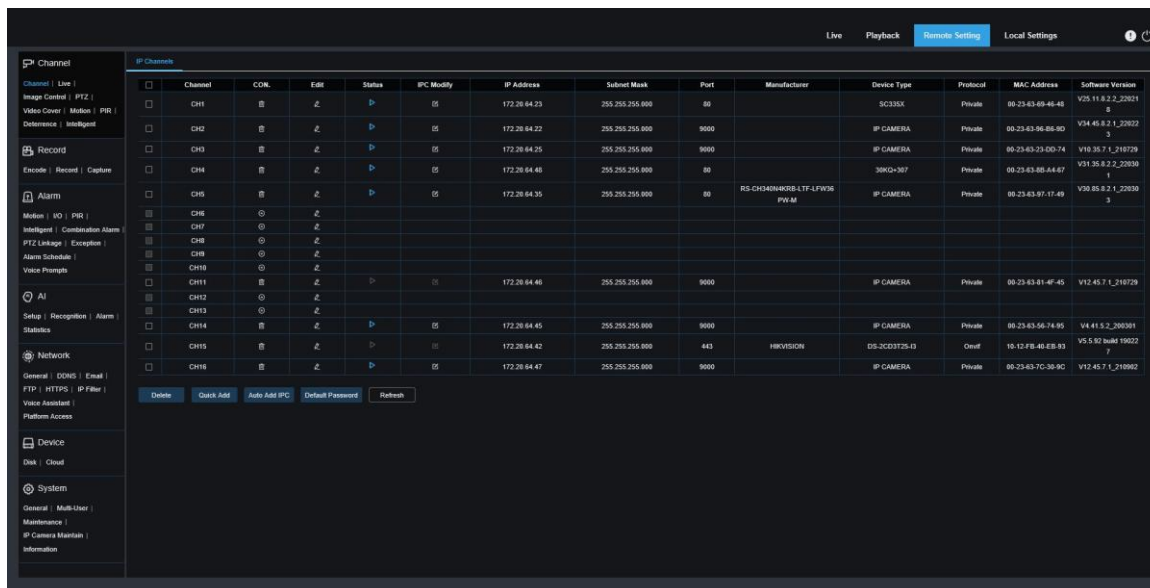


The screenshot displays the 'Remote Setting' tab in a web interface. The left sidebar contains navigation menus for Channel, Record, Alarm, AI, Network, Device, and System. The main area shows a table of IP Channels with columns for Channel, CON, ESE, Status, IPC Modify, IP Address, Subnet Mask, Port, Manufacturer, Device Type, Protocol, MAC Address, and Software Version. Below the table are buttons for Delete, Quick Add, Auto Add IPC, Default Password, and Refresh.

Channel	CON	ESE	Status	IPC Modify	IP Address	Subnet Mask	Port	Manufacturer	Device Type	Protocol	MAC Address	Software Version
CH1	8	2	▶	IS	172.28.84.23	255.255.255.000	80		SC335X	Private	00-23-63-69-46-48	V25.11.8.2.2_20021
CH2	8	2	▶	IS	172.28.84.22	255.255.255.000	8000		IP CAMERA	Private	00-23-63-96-86-80	V34.45.8.2.1_20022
CH3	8	2	▶	IS	172.28.84.25	255.255.255.000	8000		IP CAMERA	Private	00-23-63-23-00-74	V19.35.7.1_218729
CH4	8	2	▶	IS	172.28.84.40	255.255.255.000	80		3800+367	Private	00-23-63-86-A4-67	V31.35.8.2.2_20036
CH5	8	2	▶	IS	172.28.84.35	255.255.255.000	80	RS-CH340N808LTF-LFW36 P.W.M	IP CAMERA	Private	00-23-63-87-17-49	V30.85.8.2.1_20030
CH6	8	2	▶									
CH7	8	2	▶									
CH8	8	2	▶									
CH9	8	2	▶									
CH10	8	2	▶									
CH11	8	2	▶	IS	172.28.84.46	255.255.255.000	8000		IP CAMERA	Private	00-23-63-81-4F-45	V12.45.7.1_218729
CH12	8	2	▶									
CH13	8	2	▶									
CH14	8	2	▶	IS	172.28.84.45	255.255.255.000	8000		IP CAMERA	Private	00-23-63-56-74-95	V4.41.5.2_200301
CH15	8	2	▶	IS	172.28.84.42	255.255.255.000	443	HKVISION	DS-2CD3725-43	Onvif	10-12-FB-40-E8-B3	V5.5.82 build 19022
CH16	8	2	▶	IS	172.28.84.47	255.255.255.000	8000		IP CAMERA	Private	00-23-63-7C-38-9C	V12.45.7.1_218982

8.3.4 Local Setting

On this page you can set where the videos and snapshots taken through the web client are downloaded, and can select the file type of the video files.

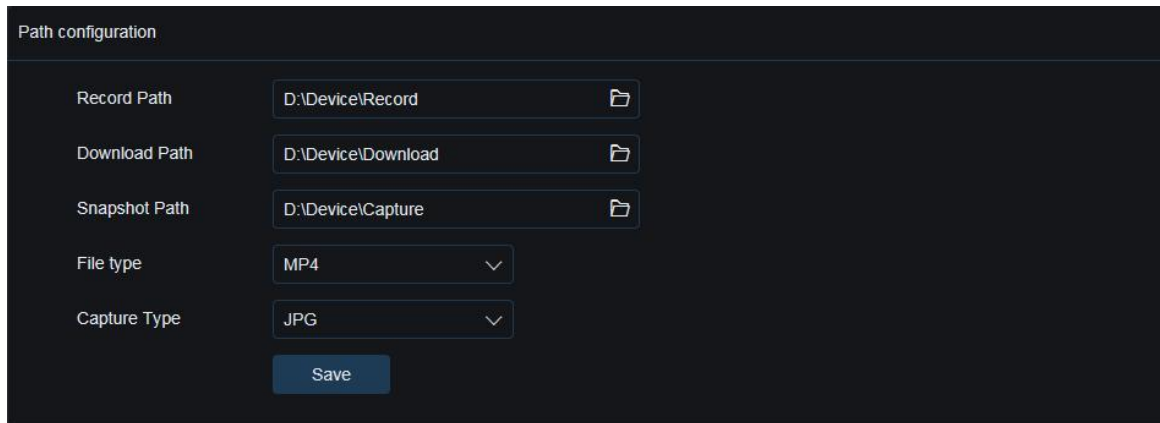

The image shows a 'Path configuration' form with a dark background. It contains five rows of settings. The first three rows are for paths: 'Record Path' with value 'D:\Device\Record', 'Download Path' with value 'D:\Device\Download', and 'Snapshot Path' with value 'D:\Device\Capture'. Each path field has a folder icon on the right. The fourth row is 'File type' with a dropdown menu showing 'MP4'. The fifth row is 'Capture Type' with a dropdown menu showing 'JPG'. At the bottom of the form is a blue 'Save' button.

Path configuration	
Record Path	D:\Device\Record 
Download Path	D:\Device\Download 
Snapshot Path	D:\Device\Capture 
File type	MP4 
Capture Type	JPG 
	

Record Path: Click to select the folder where the manually recorded videos are stored on the computer.

Download Path: Click to select the folder where the downloaded videos are stored on the computer.

Snapshot Path: Click to select the folder where the manually captured snapshots are stored on the computer.

File Type: Select the type of the manually recorded video files.

Save: Click this button to save the changes.

Contacts:

WhatsApp: +420 777 054 888

Email: support@partizan.global

Telegram: https://t.me/PartizanSupport_bot